



Intel[®] Xeon[®] Processor E5 v2 Product Family

Datasheet- Volume Two: Registers

March 2014



INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. Intel products are not intended for use in medical, life saving, life sustaining, critical control or safety systems, or in nuclear facility applications.

A "Mission Critical Application" is any application in which failure of the Intel Product could result, directly or indirectly, in personal injury or death. SHOULD YOU PURCHASE OR USE INTEL'S PRODUCTS FOR ANY SUCH MISSION CRITICAL APPLICATION, YOU SHALL INDEMNIFY AND HOLD INTEL AND ITS SUBSIDIARIES, SUBCONTRACTORS AND AFFILIATES, AND THE DIRECTORS, OFFICERS, AND EMPLOYEES OF EACH, HARMLESS AGAINST ALL CLAIMS COSTS, DAMAGES, AND EXPENSES AND REASONABLE ATTORNEYS' FEES ARISING OUT OF, DIRECTLY OR INDIRECTLY, ANY CLAIM OF PRODUCT LIABILITY, PERSONAL INJURY, OR DEATH ARISING IN ANY WAY OUT OF SUCH MISSION CRITICAL APPLICATION, WHETHER OR NOT INTEL OR ITS SUBCONTRACTOR WAS NEGLIGENT IN THE DESIGN, MANUFACTURE, OR WARNING OF THE INTEL PRODUCT OR ANY OF ITS PARTS.

Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them.

Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families. See http://www.intel.com/products/processor_number for details.

The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order.

Copies of documents which have an order number and are referenced in this document, or other Intel literature may be obtained by calling 1-800-548-4725 or by visiting Intel's website at <http://www.intel.com/design/literature.htm>.

I²C is a two-wire communications bus/protocol developed by Philips. SMBus is a subset of the I²C bus/protocol and was developed by Intel. Implementations of the I²C bus/protocol may require licenses from various entities, including Philips Electronics N.V. and North American Philips Corporation.

No computer system can provide absolute security under all conditions. Intel® Trusted Execution Technology (Intel® TXT) requires a computer with Intel® Virtualization Technology, an Intel TXT-enabled processor, chipset, BIOS, Authenticated Code Modules and an Intel TXT-compatible measured launched environment (MLE). Intel TXT also requires the system to contain a TPM v1.s. For more information, visit <http://www.intel.com/technology/security>

Requires a system with Intel® Turbo Boost Technology. Intel Turbo Boost Technology and Intel Turbo Boost Technology 2.0 are only available on select Intel® processors. Consult your PC manufacturer. Performance varies depending on hardware, software, and system configuration. For more information, visit <http://www.intel.com/go/turbo>

Intel® Virtualization Technology requires a computer system with an enabled Intel® processor, BIOS, and virtual machine monitor (VMM). Functionality, performance or other benefits will vary depending on hardware and software configurations. Software applications may not be compatible with all operating systems. Consult your PC manufacturer. For more information, visit <http://www.intel.com/go/virtualization>

ENERGY STAR is a system-level energy specification, defined by the Environmental Protection Agency, that relies on all system components, such as processor, chipset, power supply, etc.) For more information, visit <http://www.intel.com/technology/epa/index.htm>

The original equipment manufacturer must provide TPM functionality, which requires a TPM-supported BIOS. TPM functionality must be initialized and may not be available in all countries.

Intel, Intel Enhanced SpeedStep Technology, and the Intel logo are trademarks of Intel Corporation in the U. S. and/or other countries.

*Other names and brands may be claimed as the property of others.

Copyright © 2014, Intel Corporation. All Rights Reserved.



Contents

1	Registers Overview and Configuration Process	19
1.1	Platform Configuration Structure	19
1.1.1	Processor IIO Devices (CPUBUSNO (0))	19
1.1.2	Processor Uncore Devices (CPUBUSNO (1))	20
1.2	Configuration Register Rules	22
1.2.1	CSR Access	22
1.2.2	MSR Access	26
1.2.3	Memory-Mapped I/O Registers	26
1.3	Register Terminology	26
1.4	Protected Processor Inventory Number	27
2	Integrated Memory Controller (iMC) Configuration Registers	29
2.1	Intel® Xeon® Processor E5 v2 Processor registers	29
2.2	Intel® Xeon® Processor E5-2400 v2 Processor registers	29
2.3	Device 15 Function 0	29
2.3.1	pxpcap	31
2.3.2	mcmtr	31
2.3.3	tadwayness_[0:11]	33
2.3.4	mcmtr2	34
2.3.5	mc_init_state_g	34
2.3.6	rcomp_timer	35
2.3.7	mh_maincntl	36
2.3.8	mh_sense_500ns_cfg	37
2.3.9	mh_dtycyc_min_asrt_cntr_[0:1]	38
2.3.10	mh_io_500ns_cntr	39
2.3.11	mh_chn_astn	39
2.3.12	mh_temp_stat	40
2.3.13	mh_ext_stat	41
2.3.14	smb_stat_[0:1]	42
2.3.15	smbcmd_[0:1]	44
2.3.16	smbcntl_[0:1]	45
2.3.17	smb_tsod_poll_rate_cntr_[0:1]	47
2.3.18	smb_period_cfg	47
2.3.19	smb_period_cntr	48
2.3.20	smb_tsod_poll_rate	48
2.4	Device 15 Function 1	48
2.4.1	pxpcap	49
2.4.2	spareaddresslo	50
2.4.3	sparectl	51
2.4.4	ssrstatus	52
2.4.5	scrubaddresslo	52
2.4.6	scrubaddresshi	52
2.4.7	scrubctl	53
2.4.8	spareinterval	54
2.4.9	rasenables	54
2.4.10	smisparectl	55
2.4.11	leaky_bucket_cfg	55
2.4.12	leaky_bucket_cntr_lo	57
2.4.13	leaky_bucket_cntr_hi	58
2.5	Device 15 Functions 2-5	58
2.5.1	pxpcap	59
2.5.2	dimmmtr_[0:2]	59
2.5.3	pxpenhcap	61



2.6	Device 16 Functions 0, 1, 4, 5	61
2.6.1	pxpcap	64
2.6.2	chn_temp_cfg	64
2.6.3	chn_temp_stat	65
2.6.4	dimmm_temp_oem_[0:2]	65
2.6.5	dimmm_temp_th_[0:2]	66
2.6.6	dimmm_temp_thrt_lmt_[0:2]	67
2.6.7	dimmm_temp_ev_ofst_[0:2]	67
2.6.8	dimmmtempstat_[0:2]	68
2.6.9	thrt_pwr_dimm_[0:2]	69
2.6.10	tcdbp	70
2.6.11	tcrap	70
2.6.12	tcrwp	71
2.6.13	tcothp	73
2.6.14	tcrfp	74
2.6.15	tcrftp	74
2.6.16	tcsrftp	75
2.6.17	tcmr2shadow	76
2.6.18	tczqcal	76
2.6.19	tcstagger_ref	77
2.6.20	tcmr0shadow	77
2.6.21	rpqage	78
2.6.22	idletime	78
2.6.23	rdimmmtimingcntl	79
2.6.24	rdimmmtimingcntl2	80
2.6.25	tcmrs	80
2.6.26	mc_init_stat_c	80
2.7	Device 16, Functions 2, 3, 6, 7	81
2.7.1	correrrcnt_0	83
2.7.2	correrrcnt_1	84
2.7.3	correrrcnt_2	84
2.7.4	correrrcnt_3	85
2.7.5	correrrthrshld_0	85
2.7.6	correrrthrshld_1	86
2.7.7	correrrthrshld_2	86
2.7.8	correrrthrshld_3	86
2.7.9	correrrorstatus	87
2.7.10	leaky_bkt_2nd_cntr_reg	87
2.7.11	devtag_cntl_[0:7]	88
3	R2PCIe	91
3.1	Device 19 Function 0	91
4	Intel® QuickPath Interconnect (Intel® QPI Agent) Registers	93
4.1	Intel QuickPath Interconnect Link Layers Registers	93
4.1.1	QPIMISCSTAT: Intel QPI Misc Status	94
4.1.2	FWDC_LCPKAMP_CFG	94
5	Intel QuickPath Interconnect Ring (R3QPI) Registers	95
5.1	Device 19 Function 4	95
5.1.1	VID	96
5.1.2	DID	96
5.1.3	PCICMD	97
5.1.4	PCISTS	97
5.1.5	rid	98
5.1.6	ccr	98
5.1.7	CLSR	98
5.1.8	PLAT	98



5.1.9	HDR	99
5.1.10	BIST	99
5.1.11	SVID	99
5.1.12	SDID	99
5.1.13	CAPPTR	99
5.1.14	INTL	100
5.1.15	INTPIN	100
5.1.16	MINGNT	100
5.1.17	MAXLAT	100
5.1.18	R3QQRT	100
5.1.19	R3QRTE[0:1]CR	102
5.1.20	R3QCBOHACR	102
5.1.21	R3QE[0:1]CR	103
5.1.22	R3QPCIR[0:1]CR	103
5.1.23	R3QCTRL	104
5.1.24	R3SNPFANOUT_P[0:1]	104
5.1.25	R3QTxTRH	105
5.1.26	R3QRRC	106
5.1.27	R2IGRSPARECSR	106
5.1.28	R3QIGRVNSELO	106
5.1.29	R3QIGRVNSEL1	106
5.1.30	R3_GL_ERR_CFG	107
5.1.31	R3BGFTUNE	107
5.1.32	R3EGRCTRL	107
5.1.33	R3QEGR1VNSEL	108
5.1.34	R3QINGCTL	108
5.1.35	R3QINGADVNACTL	108
5.1.36	R3INGADTXQCTL	109
5.1.37	R3INGVN0SMCRDCTL	109
5.1.38	R3EGRERRLOG[0:1]	109
5.1.39	R3EGRERRMSK[0:1]	110
5.1.40	R3INGERRLOG0	111
5.1.41	R3INGERRMASK0	112
5.1.42	R3INGERRLOG1	113
5.1.43	R3INGERRMASK1	114
5.1.44	R3UTLSPARECSR	115
5.1.45	R3INGERRLOG_MISC	115
5.1.46	R3QDEBUG	116
5.2	Device 19 Function 5 - 6	116
5.2.1	VID	117
5.2.2	DID	117
5.2.3	PCICMD	118
5.2.4	PCISTS	118
5.2.5	rid	119
5.2.6	ccr	119
5.2.7	CLSR	119
5.2.8	PLAT	119
5.2.9	HDR	120
5.2.10	BIST	120
5.2.11	SVID	120
5.2.12	SDID	120
5.2.13	CAPPTR	120
5.2.14	INTL	121
5.2.15	INTPIN	121
5.2.16	MINGNT	121
5.2.17	MAXLAT	121



5.2.18	PMONCNTRLOWER0_[0:2]	122
5.2.19	PMONCNTRUPPER[0:1]_[0:2]	122
5.2.20	PMONCNTRCFG[0:1]_[0:2]	122
5.2.21	PMONUNITCTRL[0:1]	123
5.2.22	PMONCTRSTATUS[0:1]	123
5.3	Device 20 Function 1	124
5.3.1	VID	124
5.3.2	DID	125
5.3.3	PCICMD	125
5.3.4	PCISTS	125
5.3.5	rid	126
5.3.6	ccr	126
5.3.7	CLSR	126
5.3.8	PLAT	127
5.3.9	HDR	127
5.3.10	BIST	127
5.3.11	SVID	127
5.3.12	SDID	127
5.3.13	CAPPTR	128
5.3.14	INTL	128
5.3.15	INTPIN	128
5.3.16	MINGNT	128
5.3.17	MAXLAT	128
5.3.18	RC_IOTHUB_CRO	129
5.3.19	RC_IOTHUB_CR1	129
5.3.20	RC_IOTHUB_CR2	129
5.3.21	RC_IOTHUB_CR3	129
5.3.22	RC_IOTEGR_CRO	130
5.3.23	RC_IOTEGR_CR1	131
5.3.24	RC_IOTEGR_CR2	132
5.3.25	RC_IOTEGR_CR3	132
6	Processor Utility Box (UBOX) Registers	135
6.1	Device 11 Function 0	135
6.1.1	CPUNODEID	136
6.1.2	IntControl	136
6.1.3	GIDNIDMAP	137
6.1.4	CoreCount	138
6.1.5	UBOXErrSts	138
6.2	Device 11 Function 2	139
6.3	Device 11 Function 3	140
6.3.1	CPUBUSNO	141
6.3.2	SMICtrl	141
7	Power Controller Unit (PCU) Register	143
7.1	Device 10 Function 0	143
7.1.1	MEM_TRML_TEMPERATURE_REPORT	144
7.1.2	MEM_ACCUMULATED_BW_CH_[0:3]	144
7.1.3	PACKAGE_POWER_SKU	145
7.1.4	PACKAGE_POWER_SKU_UNIT	145
7.1.5	PACKAGE_ENERGY_STATUS	146
7.1.6	Package_Temperature	146
7.1.7	P_State_Limits	146
7.1.8	TEMPERATURE_TARGET	147
7.1.9	SSKPD	147
7.1.10	C2C3TT	148
7.1.11	CSR_DESIRED_CORES	149



7.1.12	PACKAGE_RAPL_PERF_STATUS	150
7.1.13	DRAM_POWER_INFO	151
7.1.14	DRAM_ENERGY_STATUS	151
7.1.15	DRAM_ENERGY_STATUS_CH[0:3]	152
7.1.16	DRAM_RAPL_PERF_STATUS	152
7.1.17	MCA_ERR_SRC_LOG	153
7.1.18	THERMTRIP_CONFIG	153
7.1.19	CAP_HDR	155
7.1.20	CAPID0	155
7.1.21	CAPID1	158
7.1.22	CAPID2	160
7.1.23	CAPID3	161
7.1.24	CAPID4	163
7.1.25	RESOLVED_CORES_MASK	164
8	Integrated I/O (IIO) Configuration Registers	165
8.1	Registers Overview	165
8.1.1	Configuration Registers (CSR)	165
8.1.2	BDF:BAR# for Various MMIO BARs in IIO	165
8.1.3	Unimplemented Devices/Functions and Registers	165
8.1.4	PCI Vs. PCIe Device / Function	166
8.2	Device 0 Function 0 DMI, Device 0 Function 0 PCIe, Device 1 Function 0-1, Device 2 Function 0-3 PCIe, Device 3 Function 0-3 PCIe	166
8.2.1	vid	171
8.2.2	did	171
8.2.3	pcicmd	172
8.2.4	pcists	173
8.2.5	rid	175
8.2.6	ccr	176
8.2.7	clsr	176
8.2.8	plat	176
8.2.9	hdr	177
8.2.10	bist	177
8.2.11	pbus	178
8.2.12	secbus	178
8.2.13	subbus	178
8.2.14	iobas	179
8.2.15	iolim	179
8.2.16	secsts	180
8.2.17	mbas	181
8.2.18	mlim	182
8.2.19	pbas	182
8.2.20	plim	183
8.2.21	pbasu	183
8.2.22	plimu	184
8.2.23	captr	184
8.2.24	intl	184
8.2.25	intpin	185
8.2.26	bctrl	185
8.2.27	scapid	186
8.2.28	snxptr	187
8.2.29	svid	187
8.2.30	sdid	187
8.2.31	dmircbar	188
8.2.32	msicapid	188
8.2.33	msinxptr	189
8.2.34	msimgctl	189



8.2.35	msgadr	190
8.2.36	msgdat	190
8.2.37	msimsk	191
8.2.38	msipending	191
8.2.39	pxpcapid	191
8.2.40	pxpnxtptr	192
8.2.41	pxpcap	192
8.2.42	devcap	193
8.2.43	devctrl	194
8.2.44	devsts	196
8.2.45	lnkcap	196
8.2.46	lnkcon	198
8.2.47	lnksts	200
8.2.48	sltcap	201
8.2.49	sltcon	203
8.2.50	sltsts	205
8.2.51	rootcon	207
8.2.52	rootcap	209
8.2.53	rootsts	210
8.2.54	devcap2	210
8.2.55	devctrl2	211
8.2.56	lnkcap2	213
8.2.57	lnkcon2	213
8.2.58	lnksts2	215
8.2.59	pmcap	216
8.2.60	pmcsr	216
8.2.61	xpreut_hdr_ext	217
8.2.62	xpreut_hdr_cap	218
8.2.63	xpreut_hdr_lef	219
8.2.64	acscaphdr	219
8.2.65	acscap	220
8.2.66	acsctrl	220
8.2.67	apicbase	221
8.2.68	apiclimit	222
8.2.69	vsecphdr	222
8.2.70	vshdr	222
8.2.71	errcaphdr	223
8.2.72	uncerrsts	223
8.2.73	uncerrmsk	224
8.2.74	uncerrsev	224
8.2.75	corerrsts	225
8.2.76	corerrmsk	225
8.2.77	errcap	226
8.2.78	hdrlog[0:3]	227
8.2.79	rperrcmd	227
8.2.80	rperrsts	227
8.2.81	errsid	228
8.2.82	perfctrlsts_0	229
8.2.83	perfctrlsts_1	231
8.2.84	miscctrlsts_0	231
8.2.85	miscctrlsts_1	233
8.2.86	pcie_iou_bif_ctrl	235
8.2.87	dmictrl	236
8.2.88	dmists	237
8.2.89	ERRINJCAP	237
8.2.90	ERRINJHDR	237



8.2.91	ERRINJCON	238
8.2.92	ctoctrl	239
8.2.93	xpcorerrsts	239
8.2.94	xpcorerrmsk	239
8.2.95	xpuncerrsts	240
8.2.96	xpuncerrmsk	240
8.2.97	xpuncerrsev	241
8.2.98	xpuncerrptr	242
8.2.99	uncedmask	242
8.2.100	coredmask	243
8.2.101	rpedmask	243
8.2.102	xpuncedmask	243
8.2.103	xpcoredmask	244
8.2.104	xpglberrsts	244
8.2.105	xpglberrptr	245
8.2.106	pxp2cap	246
8.2.107	lnkcon3	246
8.2.108	lnerrsts	247
8.2.109	ln[0:3]eq	247
8.2.110	ln[4:7]eq	249
8.2.111	ln[8:15]eq	250
8.2.112	ler_cap	252
8.2.113	ler_hdr	252
8.2.114	ler_ctrlsts	253
8.2.115	ler_uncerrmsk	254
8.2.116	ler_xpuncerrmsk	254
8.2.117	0-1ler_rperrmsk	255
8.2.118	xppmdl[0:1]	255
8.2.119	xppmcl[0:1]	256
8.2.120	xppmdh	256
8.2.121	xppmch	257
8.2.122	xppmr[0:1]	257
8.2.123	xppmevl[0:1]	261
8.2.124	xppmevh[0:1]	263
8.2.125	xppmer[0:1]	264
8.3	Device 0 Function 0 Region DMIRCBAR	265
8.3.1	dmiv0rcap	266
8.3.2	dmiv0rctl	266
8.3.3	dmiv0rst	267
8.3.4	dmiv1rcap	268
8.3.5	dmiv1rctl	268
8.3.6	dmiv1rst	269
8.3.7	dmivprcap	270
8.3.8	dmivprctl	270
8.3.9	dmivprsts	271
8.3.10	dmivmrcap	272
8.3.11	dmivmrctl	272
8.3.12	dmivmrsts	273
8.3.13	dmiv1cdtthrottle	273
8.3.14	dmivpcdtthrottle	274
8.3.15	dmivmcdtthrottle	274
8.4	Device 4 Function 0-7	275
8.4.1	vid	276
8.4.2	did	276
8.4.3	pcicmd	277
8.4.4	pcists	277



8.4.5	rid	278
8.4.6	ccr	278
8.4.7	clsr	279
8.4.8	hdr	279
8.4.9	cb_bar	279
8.4.10	svid	280
8.4.11	sdid	280
8.4.12	capptr	280
8.4.13	intl	280
8.4.14	intpin	281
8.4.15	devcfg	281
8.4.16	msixcapid	282
8.4.17	msixnxtptr	282
8.4.18	msixmsgctl	283
8.4.19	tableoff_bir	283
8.4.20	pbaoff_bir	284
8.4.21	capid	284
8.4.22	nextptr	284
8.4.23	expcap	285
8.4.24	devcap	285
8.4.25	devcon	286
8.4.26	devsts	287
8.4.27	devcap2	288
8.4.28	devcon2	288
8.4.29	pmcap	288
8.4.30	pmcsr	289
8.4.31	dmauncerrsts	290
8.4.32	dmauncerrmsk	291
8.4.33	dmauncerrsev	291
8.4.34	dmauncerrptr	292
8.4.35	dmaglberrptr	292
8.4.36	chanerr_int	292
8.4.37	chanerrmsk_int	294
8.4.38	chanerrsev_int	295
8.4.39	chanerrptr	296
8.5	Device 4 Function 0 - 7 MMIO Region CB_BARS	296
8.5.1	chancnt	297
8.5.2	xfercap	297
8.5.3	genctrl	298
8.5.4	intrctrl	298
8.5.5	attnstatus	299
8.5.6	cbver	299
8.5.7	intrdelay	300
8.5.8	cs_status	300
8.5.9	dmacapability	300
8.5.10	dcaoffset	302
8.5.11	cbprio	302
8.5.12	chanctrl	303
8.5.13	dma_comp	304
8.5.14	chancmd	305
8.5.15	dmacount	305
8.5.16	chansts_0	305
8.5.17	chansts_1	306
8.5.18	chainaddr_0	306
8.5.19	chainaddr_1	307
8.5.20	chancmp_0	307



8.5.21	chancmp_1	307
8.5.22	chanerr	308
8.5.23	chanerrmsk	310
8.5.24	dcactrl	310
8.5.25	dca_ver	311
8.5.26	dca_reqid_offset	311
8.5.27	csi_capability	311
8.5.28	pcie_capability	312
8.5.29	csi_cap_enable	312
8.5.30	pcie_cap_enable	312
8.5.31	apicid_tag_map	312
8.5.32	dca_reqid[0:1]	314
8.5.33	msgaddr	314
8.5.34	msgupaddr	314
8.5.35	msgdata	315
8.5.36	vecctrl	315
8.5.37	pendingbits	315
8.6	Device 5 Function 0	316
8.6.1	vid	318
8.6.2	did	318
8.6.3	pcicmd	318
8.6.4	pcists	319
8.6.5	rid	320
8.6.6	ccr	320
8.6.7	clsr	321
8.6.8	hdr.enable	321
8.6.9	svid	321
8.6.10	sdid	321
8.6.11	captr	322
8.6.12	intl	322
8.6.13	intpin	322
8.6.14	pxpcapid	322
8.6.15	pxpnxtptr	323
8.6.16	pxpcap	323
8.6.17	hdrtypectrl	323
8.6.18	mmcfg_base	324
8.6.19	mmcfg_limit	324
8.6.20	tseg	324
8.6.21	genprotrange[1:0]_base	324
8.6.22	genprotrange[1:0]_limit	326
8.6.23	genprotrange2_base	326
8.6.24	genprotrange2_limit	327
8.6.25	tolm	327
8.6.26	tohm	327
8.6.27	ncmem_base	328
8.6.28	ncmem_limit	328
8.6.29	mencmem_base	329
8.6.30	mencmem_limit	329
8.6.31	cpubusno	329
8.6.32	ImmioI_base	330
8.6.33	ImmioI_limit	330
8.6.34	ImmioH_base	331
8.6.35	ImmioH_limit	331
8.6.36	cipctrl	332
8.6.37	cipsts	333
8.6.38	cipdcasad	334



8.6.39	8.6.39	335
8.6.40	8.6.40	335
8.6.41	8.6.41	336
8.6.42	8.6.42	337
8.6.43	8.6.43	337
8.6.44	8.6.44	339
8.6.45	8.6.45	340
8.6.46	8.6.46	340
8.6.47	8.6.47	341
8.6.48	8.6.48	341
8.6.49	8.6.49	342
8.6.50	8.6.50	346
8.6.51	8.6.51	347
8.6.52	8.6.52	348
8.6.53	8.6.53	348
8.7	8.7	348
8.7.1	8.7.1	350
8.7.2	8.7.2	350
8.7.3	8.7.3	351
8.7.4	8.7.4	352
8.7.5	8.7.5	354
8.7.6	8.7.6	355
8.7.7	8.7.7	355
8.7.8	8.7.8	357
8.7.9	8.7.9	357
8.7.10	8.7.10	358
8.7.11	8.7.11	359
8.7.12	8.7.12	359
8.7.13	8.7.13	359
8.7.14	8.7.14	360
8.7.15	8.7.15	360
8.7.16	8.7.16	360
8.7.17	8.7.17	361
8.7.18	8.7.18	361
8.7.19	8.7.19	361
8.7.20	8.7.20	362
8.7.21	8.7.21	362
8.7.22	8.7.22	362
8.7.23	8.7.23	363
8.7.24	8.7.24	363
8.7.25	8.7.25	364
8.7.26	8.7.26	364
8.7.27	8.7.27	364
8.7.28	8.7.28	365
8.7.29	8.7.29	365
8.7.30	8.7.30	366
8.7.31	8.7.31	367
8.7.32	8.7.32	367
8.7.33	8.7.33	368
8.7.34	8.7.34	368
8.7.35	8.7.35	368
8.7.36	8.7.36	369
8.7.37	8.7.37	369
8.7.38	8.7.38	369
8.7.39	8.7.39	369
8.7.40	8.7.40	370



8.7.41	svid	370
8.7.42	sdid	370
8.7.43	capptr	371
8.7.44	intl	371
8.7.45	intpin	371
8.7.46	mingnt	371
8.7.47	maxlat	371
8.7.48	pxpcap	372
8.7.49	msicap	373
8.7.50	msictl	373
8.7.51	msiar	373
8.7.52	msidr	374
8.7.53	memhpcctl	374
8.7.54	xpprivc1	374
8.7.55	memhpcap[0:3]	374
8.7.56	memhphdr[0:3]	375
8.7.57	sltcap[0:3]	375
8.7.58	sltcon[0:3]	376
8.7.59	sltsts[0:3]	378
8.8	Device 5 Function 2	379
8.8.1	vid	382
8.8.2	did	382
8.8.3	pcicmd	382
8.8.4	pcists	383
8.8.5	rid	384
8.8.6	ccr	384
8.8.7	clsr	385
8.8.8	hdr	385
8.8.9	svid	385
8.8.10	sdid	385
8.8.11	capptr	386
8.8.12	intl	386
8.8.13	intpin	386
8.8.14	pxpcapid	386
8.8.15	pxpnxtptr	386
8.8.16	pxpcap	387
8.8.17	csr_sat_mask_set	387
8.8.18	cgctrl3	387
8.8.19	cgctrl6	387
8.8.20	cgctrl7	388
8.8.21	cgsts	388
8.8.22	cgstagger	388
8.8.23	cgctrl5	388
8.8.24	cgctrl4_0	389
8.8.25	cgctrl4_1	389
8.8.26	irpperrsv	389
8.8.27	lloerrsv	390
8.8.28	mierrsv	391
8.8.29	pcierrsv	391
8.8.30	sysmap	391
8.8.31	viral	392
8.8.32	errpinctl	393
8.8.33	errpinsts	393
8.8.34	errpindat	393
8.8.35	vppctl	394
8.8.36	vppsts	395



8.8.37	vppfreq	396
8.8.38	vppmem	396
8.8.39	vpp_inverts	397
8.8.40	miscprivc	397
8.8.41	gcerrst	397
8.8.42	gcferrst	398
8.8.43	gcnerrst	399
8.8.44	gnerrst	399
8.8.45	gferrst	400
8.8.46	gerrctl	402
8.8.47	gsysst	403
8.8.48	gsysctl	403
8.8.49	gtime_lsb	404
8.8.50	gtime_msb	404
8.8.51	gfferrst, gfnerrst	404
8.8.52	gnferrst, gnnerrst	405
8.8.53	irpp[0:1]errst	405
8.8.54	irpp[0:1]errctl	405
8.8.55	irpp[0:1]fferrst, irpp[0:1]fnerrst	406
8.8.56	irpp[0:1]fferrhd[0:3]	407
8.8.57	irpp[0:1]nferrst, irpp[0:1]nnerrst	407
8.8.58	irpp[0:1]nferrhd[0:3]	407
8.8.59	irpp[0:1]errcnt	408
8.8.60	iioerrst	408
8.8.61	iioerrctl	409
8.8.62	iiofferrst, iiofnerrst	410
8.8.63	iiofferrhd_[0:3]	410
8.8.64	iiionferrst, iiionnerrst	410
8.8.65	iiionferrhd_[0:3]	411
8.8.66	iiioerrcntsel	411
8.8.67	iiioerrcnt	411
8.8.68	mierrst	412
8.8.69	mierrctl	412
8.8.70	mifferrst, mifnerrst	413
8.8.71	mifferrhdr_[0:3]	413
8.8.72	minferrst, minnerrst	413
8.8.73	minferrhdr_[0:3]	413
8.8.74	mierrcntsel	414
8.8.75	mierrcnt	414
8.9	Device 5 Function 4	414
8.9.1	vid	415
8.9.2	did	415
8.9.3	pcicmd	416
8.9.4	pcists	416
8.9.5	rid	417
8.9.6	ccr	417
8.9.7	clsr	418
8.9.8	hdr	418
8.9.9	mbar	418
8.9.10	svid	419
8.9.11	sid	420
8.9.12	capptr	420
8.9.13	intlin	420
8.9.14	intpin	420
8.9.15	abar	421
8.9.16	pxpcap	421




8.9.17	snapshot_index	422
8.9.18	snapshot_window	422
8.9.19	ioapictetpc	422
8.9.20	pmcap	423
8.9.21	pmcsr	423
8.9.22	ioadsels0	424
8.9.23	ioadsels1	425
8.9.24	iointsrc0	425
8.9.25	iointsrc1	426
8.9.26	ioremintcnt	426
8.9.27	ioremgpcnt	427
8.9.28	FauxGV	427
8.10	Device 5 Function 4 I/OxAPIC	427
8.10.1	index	428
8.10.2	window	428
8.10.3	eoi	428
8.10.4	Device 5 Function 4 Window 0	428
8.11	Device 6-7 Function 0,1,3	433
8.11.1	rx_ctle_peak_gen2	433
8.11.2	rx_ctle_peak_gen2	433
8.11.3	rx_ctle_peak_gen3	434
8.11.4	rx_ctle_peak_gen2	434
8.11.5	rx_ctle_peak_gen3	434
8.12	Non Transparent Bridge Registers	435
8.12.1	Configuration Register Map (NTB Primary Side)	435
8.12.2	Standard PCI Configuration Space - Type 0 Common Configuration Space	438
8.12.3	NTB Port 3A Configured as Primary Endpoint Device	444
8.12.4	PCI Express Configuration Registers (NTB Secondary Side)	478
8.12.5	Configuration Register Map (NTB Secondary Side)	478
8.12.6	NTB Shadowed MMIO Space	507
8.12.7	NTB Primary/Secondary Host MMIO Registers	509
8.12.8	MSI-X MMIO Registers (NTB Primary side)	526
8.12.9	MSI-X MMIO registers (NTB Secondary Side)	528
8.13	Crystal Beach DMA	530
8.13.1	Crystal Beach DMA Registers Maps	530

Figures

1-1	Processor Integrated I/O Device Map	19
1-2	Processor Uncore Devices Map	21

Tables

1-1	Functions Specifically Handled by the Processor	23
1-2	Register Attributes Definitions	26
8-1	BDF:BAR# for Various MMIO BARs in IIO	165
8-2	Function Number of Active Root Ports in Port 1(Dev#1) based on Port Bifurcation	166
8-3	Function Number of Active Root Ports in Port 2(Dev#2) based on Port Bifurcation	166
8-4	Function Number of Active Root Ports in Port 3(Dev#3) based on Port Bifurcation	166
8-5	Device 3 Function 0 (Non-Transparent Bridge) Configuration Map Offset 0x00h - 0xFCh	435
8-6	Device 3 Function 0 (Non-Transparent Bridge) Configuration Map Offset 0x100h - 0x1FCh	436
8-7	Device 3 Function 0 (Non-Transparent Bridge) Configuration Map Offset 0x200h - 0x2FCh	437
8-8	Device 0 Function 0 (Non -Transparent Bridge) Configuration Map 0x00h - 0xFCh	478
8-9	Device 0 Function 0 (Non -Transparent Bridge) Configuration Map 0x100h - 0x1FCh	479



8-10	NTB MMIO Shadow Registers.....	507
8-11	NTB MMIO Map.....	508
8-12	NTB MMIO Map.....	526
8-13	MSI-X Vector Handling and Processing by IIO on Primary Side.....	527
8-14	NTB MMIO Map.....	528
8-15	MSI-X Vector Handling and Processing by IIO on Secondary Side.....	529
8-16	Crystal Beach DMA Configuration Map. Device 4 Function 0 -7 Offset 0x00H to 0x0FCH.....	530
8-17	Crystal Beach DMA Configuration Map. Device 4 Function 0 -7 Offset 0x100-0x1FF.....	532



Revision History

Revision Number	Description	Date
001	<ul style="list-style-type: none">Initial release of the document.	August 2013
002	<ul style="list-style-type: none">Added register information for E5-2400 v2	January 2014
003	<ul style="list-style-type: none">Added Protected Processor Inventory Number Information	March 2014

§





1 Registers Overview and Configuration Process

The Intel® Xeon® Processor E5 v2 product family contains one or more PCI devices within each individual functional block. The configuration registers for these devices are mapped as devices residing on the PCI Bus assigned for the processor socket.


1.1 Platform Configuration Structure

The DMI2 physically connects the processor and the PCH. From a configuration standpoint the DMI2 is a logical extension of PCI Bus 0. DMI2 and the internal devices in the processor IIO and PCH logically constitute PCI Bus 0 to configuration software. As a result, all devices internal to the processor and the PCH appear to be on PCI Bus 0.

1.1.1 Processor IIO Devices (CPUBUSNO (0))

The processor IIO contains PCI devices within a single, physical component. The configuration registers for the devices are mapped as devices residing on PCI Bus “CPUBUSNO(0)” where CPUBUSNO(0) is programmable by BIOS.

Figure 1-1. Processor Integrated I/O Device Map

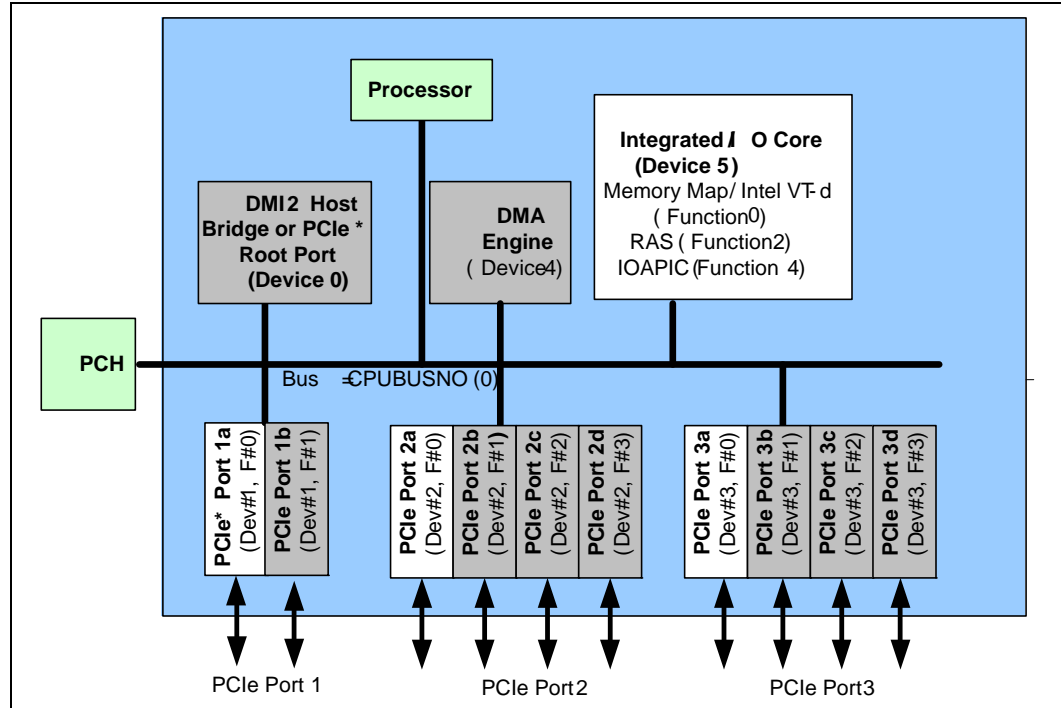

- **Device 0:** DMI2 Root Port. Logically this appears as a PCI device residing on PCI Bus 0. Device 0 contains the standard PCI header registers, extended PCI configuration registers and DMI2 device specific configuration registers.




- **Device 1:** PCI Express* Root Port 1a, 1b. Logically this appears as a “virtual” PCI-to-PCI bridge residing on PCI Bus 0 and is compliant with *PCI Express Local Bus Specification Revision 2.0*. Device 1 contains the standard PCI Express/PCI configuration registers including PCI Express Memory Address Mapping registers. It also contains the extended PCI Express configuration space that include PCI Express error status/control registers and Virtual Channel controls.
- **Device 2:** PCI Express* Root Port 2a, 2b, 2c and 2d. Logically this appears as a “virtual” PCI-to-PCI bridge residing on PCI Bus 0 and is compliant with *PCI Express Local Bus Specification Revision 2.0*. Device 2 contains the standard PCI Express/PCI configuration registers including PCI Express Memory Address Mapping registers. It also contains the extended PCI Express configuration space that include PCI Express Link status/control registers and Virtual Channel controls.
- **Device 3:** PCI Express Root Port 3a, 3b, 3c and 3d. Logically this appears as a “virtual” PCI-to-PCI bridge residing on PCI Bus 0 and is compliant with *PCI Express Local Bus Specification Revision 2.0*. Device 3 contains the standard PCI Express/PCI configuration registers including PCI Express Memory Address Mapping registers. It also contains the extended PCI Express configuration space that include PCI Express error status/control registers and Virtual Channel controls.
- **Device 4:** Crystal Beach DMA. This device contains the Standard PCI registers for each of its functions. This device implements 8 functions for the 8 DMA Channels and also contains Memory Map I/O registers.
- **Device 5:** Integrated I/O Core. This device contains the Standard PCI registers for each of its functions. This device implements three functions; Function 0 contains Address Mapping, Intel® Virtualization Technology (Intel® VT) for Directed I/O (Intel® VT-d) related registers and other system management registers. Function 1 contains PCIe* and Memory Hot-Plug registers. Function 2 contains I/O RAS registers, Function 4 contains System Control/Status registers and miscellaneous control/status registers on power management and throttling.

1.1.2 Processor Uncore Devices (CPUBUSNO (1))

The configuration registers for these devices are mapped as devices residing on the PCI bus assigned for the processor socket. Bus number is derived by the max bus range setting and processor socket number.



Figure 1-2. Processor Uncore Devices Map

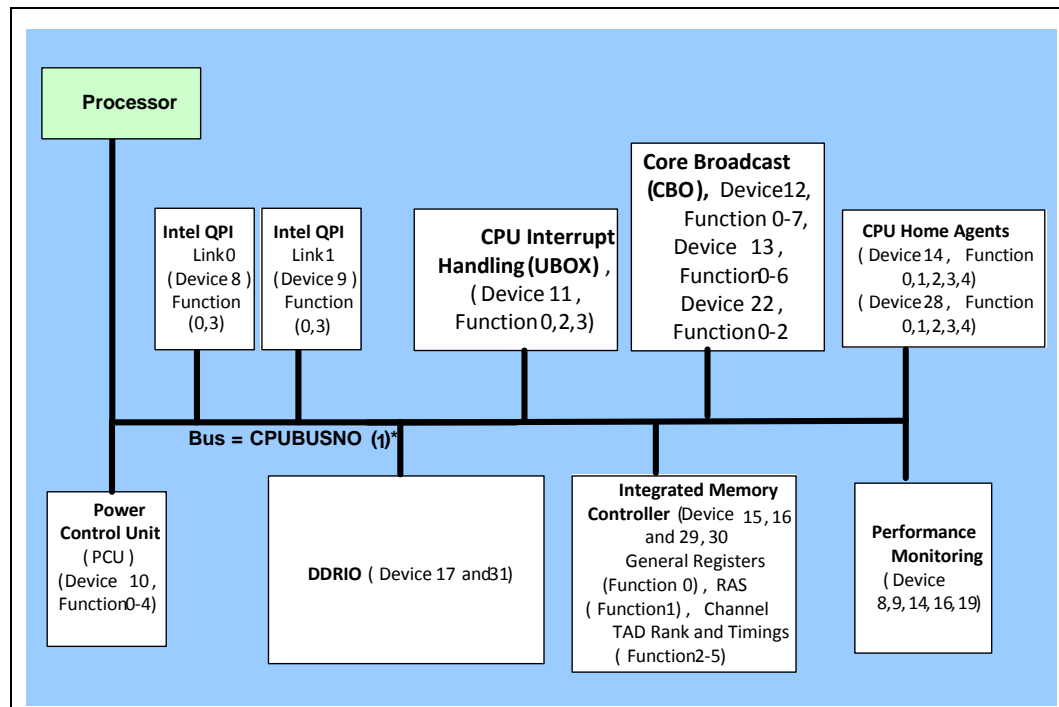

- **Device 8:** Intel® QuickPath Interconnect (Intel® QPI) Link 0. Device 8, Function 0 and 3 contain the configurable Intel QPI Link 0 registers
- **Device 9:** Intel QPI Link 1. Device 9, Function 0 and 3 contain the configurable Intel QPI Link 1 registers.
- **Device 10:** Processor Power Control Unit. Device 10, Function 0-4 contains the configurable PCU registers.
- **Device 11:** Processor Interrupt Event Handling (UBox). Device 11, Function 0 contains the processor Interrupt control registers. Device 11, Function 3 contains the Semaphore and Scratchpad configuration registers.
- **Device 12:** Processor Core Broadcast. Device 12, Function 0-7 contains the Unicast configuration registers.
- **Device 13:** Processor Core Broadcast. Device 13, Function 0-6 contains the Unicast configuration registers
- **Device 14:** Processor Home Agent 0. Device 14, Function 0 contains the processor Home Agent Target Address configuration registers for the Memory Controller. Device 14, Function 1 contains processor Home Agent performance monitoring registers.
- **Device 15:** Integrated Memory Controller 0. Device 15, Function 0 contains the general and MemHot registers for the Integrated Memory Controller 0 and resides. Function 1 contains the RAS registers for Integrated Memory Controller 0. Device 15, Function 2-5 contains the Target Address Decode, Channels Rank and Memory Timing Registers.
- **Device 16:** DDR Channel 0,1,2,3. Device 16, Function 0, 1, 4 and 5 contains the Thermal control registers for DDR Channel 0,1,2,3. Device 16, Function 2, 3, 6 and 7 contains the test registers for DDR Channel 0,1,2,3.



- **Device 18:** Processor Performance Monitoring and Ring. Device 18, Function 4 -6 contains the processor Ring to Intel QPI Link 2, Intel QPI agent ring, and performance monitoring registers.
- **Device 19:** Processor Performance Monitoring and Ring. Device 19 Function 0 contains the processor ring to PCI Express agent. Device 19, Function 1 contains the processor Ring to PCI Express performance monitoring registers. Device 19, Function 4 -6 contains the processor Ring to Intel QPI Link 0 and 1 Intel QPI agent ring and performance monitoring registers.
- **Device 22:** Processor Core Broadcast. Device 22 Function 1-2 contains the Caching agent broadcast configuration registers for the Memory Controller. Device 22 Function 0 contains the System Address Decode registers.

1.2 Configuration Register Rules

The Intel® Xeon® Processor E5 v2 product family supports the following configuration register types:

- PCI Configuration Registers (CSRs): CSRs are chipset specific registers that are located at PCI defined address space.
- Machine Specific Registers (MSRs): MSRs are machine specific registers that can be accessed by specific read and write instructions. It is OS ring 0 and BIOS accessible.
- Memory-mapped I/O registers: These registers are mapped into the system memory map as MMIO low or MMIO high. They are accessed by any code typically an OS driver running on the platform. This register space is introduced with the integration of some of the chipset functionality.

1.2.1 CSR Access

Configuration space registers are accessed via the well known configuration transaction mechanism defined in the PCI specification and this uses the bus:device:function number concept to address a specific device's configuration space. If initiated by a remote CPU, accesses to PCI configuration registers are achieved via NcCfgRd/Wr transactions on Intel QPI.

All configuration register accesses are accessed over Message Channel through the UBox but might come from a variety of different sources:

- Local cores
- Remote cores (over Intel QuickPath Interconnect)
- PECL or JTAG

Configuration registers can be read or written in Byte, WORD (16-bit), or DWORD (32-bit) quantities. *Accesses larger than a DWORD to PCI Express configuration space will result in unexpected behavior.* All multi-byte numeric fields use "little-endian" ordering (that is, lower addresses contain the least significant parts of the field)..

1.2.1.1 PCI Bus Number

In the tables shown for IIO devices (0 - 7), the PCI Bus numbers are all marked as "Bus 0". This means that the actual bus number is variable depending on which socket is used. The specific bus number for all PCIe devices in the Intel® Xeon® Processor E5 v2



product family is specified in the CPUBUSNO register which exists in the I/O module's configuration space. Bus number is derived by the max bus range setting and processor socket number.

1.2.1.2 Uncore Bus Number

In the tables shown for Uncore devices (8 - 19), the PCI Bus numbers are all marked as "bus 1". This means that the actual bus number is CPUBUSNO(1) where CPUBUSNO(1) is programmable by BIOS depending on which socket is used. The specific bus number for all PCIe devices in the Intel® Xeon® Processor E5 v2 product family is specified in the CPUBUSNO register.

1.2.1.3 Device Mapping

Each component in the processor is uniquely identified by a PCI bus address consisting of Bus Number, Device Number and Function Number. Device configuration is based on the PCI Type 0 configuration conventions. All processor registers appear on the PCI bus assigned for the processor socket. Bus number is derived by the max bus range setting and processor socket number.

Table 1-1. Functions Specifically Handled by the Processor (Sheet 1 of 3)

Register Group	DID	Device	Function	Comment
DMI2	E00h	0	0	x4 Link from Processor to PCH
PCI Express Root Port in DMI2 Mode	E01h	0	0	Device 0 will work as a x4 PCI Express Port
PCI Express Root Port 2	E04h, E05h, E06h, E07h	2	0 -3	x16, x8 or x4 max link width
PCI Express Root Port 3	E08, E09h, EOAh, E0Bh	3	0-3	x16, x8 or x4 max link width
Core	E28h	5	0	Address Map, VTd_Misc, System Management
Core	E29h	5	1	Hot-Plug
Core	E2Ah	5	2	RAS, Control Status and Global Errors
Core	E2Ch	5	4	I/O APIC
Crystal Beach DMA	E20h, E21h, E22h, E23h, E24h, E25h, E26h, E27h	4	0-7	DMA Channel 0 to Channel 7
Crystal Beach DMA	E2Eh - E2Fh	4	0-1	RAID 5/6
Intel QPI Link 0	E80h	8	0	Intel QPI Link 0
Intel QPI Link 1	E90h	9	0	Intel QPI Link 1
Intel QPI Link Reut 0	E83h, E84h	8	3,4	Intel QPI Link Reut 0
Intel QPI Link Reut 1	E93h, E94h	9	3,4	Intel QPI Link Reut 1



Table 1-1. Functions Specifically Handled by the Processor (Sheet 2 of 3)

Register Group	DID	Device	Function	Comment
PCU	EC0h, EC1h, EC2h EC3h EC4h	10	0-4	Power Control Unit
UBOX	E1Eh	11	0	Scratchpad and Semaphores
UBOX	E7Dh	11	2	Scratchpad and Semaphores
UBOX	E1Fh	11	3	Scratchpad and Semaphores
Caching Agent (CBo)	EE0h, EE2h, EE4h, EE6h, EE8h, EEAh, EECh, EEEh	12	0-7	Unicast Registers
Caching Agent (CBo)	EE1h, EE3h, EE5h, EE7h, EE9h, EEBh, EEDh	13	0-6	Unicast Registers
Caching Agent (CBo)	EC8h	22	0	System Address Decoder
Caching Agent (CBo)	EC9h, ECAh	22	1-2	Broadcast Registers
Integrated Memory Controller 0	EA8h	15	0	CPGC
Integrated Memory Controller 0	E71h	15	1	RAS Registers
Integrated Memory Controller 0	EAAh, EABh, EACH, EADh	15	2 -5	Channel Target Address Decoder Registers
Integrated Memory Controller 0	EB0, EB1, EB4 EB5	16	0,1,4,5	Channel 0-3 Thermal Registers
Integrated Memory Controller 0	EB2 EB3 EB6 EB7	16	2,3,6,7	Channel 0-3 ERROR Registers
Integrated Memory Controller 0	EBAh, EBBh, EBEh, EBFh	17	2,3,6,7	For 1 HA: DDRIO 0,1,2,3 Multicast
Integrated Memory Controller 0	EBCh, EBDh	17	4,5	For 2 HA: DDRIO 0 & 1
Integrated Memory Controller 0	EBEh, EBFh	17	6,7	For 2 HA: DDRIO 0,1,Multicast
Integrated Memory Controller 0	ED8h, ED9h, EDAh, EDBh,	31	0-3	For 2 HA only: DDRIO 2 & 3
R2PCIE	E1Dh	19	0	R2PCIE


Table 1-1. Functions Specifically Handled by the Processor (Sheet 3 of 3)

Register Group	DID	Device	Function	Comment
R2PCIe	E34h	19	1	PCI Express Ring Performance Monitoring
R3 Intel QPI Link 0 & 1 Performance	E36h, E37h	19	5-6	Intel QPI Ring Performance Monitoring
R3 Intel QPI 0 & 1	E81h	19	4	Intel QPI Ring Registers
R3 Intel QPI 0 & 1	0x2	20	1	Intel QPI Ring Registers

For Intel Xeon Processor E5-2400 v2 product families, ignore Intel QPI Link 1 and Memory channel 0. For Intel Xeon processor E5-1600 v2 product family, Intel QPI ports 0 and 1 do not exist. Thus the associated devices and functions are not used or unavailable.

1.2.1.4 Unimplemented Devices/Functions and Registers

Configuration reads to unimplemented functions and devices will return all ones emulating a master abort response. Note that there is no asynchronous error reporting that happens when a configuration read master aborts. Configuration writes to unimplemented functions and devices will return a normal response.

Software should not attempt or rely on reads or writes to unimplemented registers or register bits. Unimplemented registers should return all zeroes when read. Writes to unimplemented registers are ignored. For configuration writes to these register (require a completion), the completion is returned with a normal completion status (not master-aborted).

1.2.1.5 Device Hiding

The Intel® Xeon® Processor E5 v2 product family provides a mechanism by which various PCI devices or functions within the unit can be hidden from the host configuration software; that is, all PCI configuration accesses to the devices' configuration space from Intel QPI will be master aborted. This mechanism is needed in cases where a device or function is not used or is available for use, because either the device is turned off or the device is not serving any meaningful purpose in a given platform configuration.

This hiding mechanism is implemented via the DEVHIDE register:

- Devices that are hidden from host configuration space via the DEVHIDE register are not hidden from the configuration space as seen from the JTAG/SMBus port of an IIO. All PCI devices are always visible via JTAG/SMBus.
- Devices or functions when turned off are always hidden (and not programmable to be unhidden) from host configuration space and also from PECI/JTAG.
- Devices that are not turned off, but are otherwise not used in a given platform configuration can be hidden from host configuration space by BIOS appropriately programming the DEVHIDE register.
- The only change DEVHIDE register makes is to abort Type0 configuration accesses to the device space itself.



1.2.2 MSR Access

Machine specific registers are architectural and only accessed by using specific ReadMSR/WriteMSR instructions. MSRs are always accessed as a naturally aligned 4 or 8 byte quantity.

This document will include error handling configuration and logging related MSRs for various functional blocks such as Cbo, HA, iMC, QPI, IIO, and so forth. For common IA-32 architectural MSRs, please refer to the *Intel® 64 and IA-32 Software Developer's Manual*.

1.2.3 Memory-Mapped I/O Registers

The PCI standard provides not only configuration space registers but also registers which reside in memory-mapped space. For PCI devices, this is typically where the majority of the driver programming occurs and the specific register definitions and characteristics are provided by the device manufacturer. Access to these registers are typically accomplished via CPU reads and writes to non-coherent (UC) or write-combining (WC) space.

The Intel® Xeon® Processor E5 v2 product family has relatively few of these, however, the integration of some of the chipset functionality has brought with it some I/O devices. These devices include memory-mapped I/O registers.

Reads and writes to memory-mapped registers can be accomplished with 1, 2, 4 or 8 byte transactions.

1.3 Register Terminology

The bits in configuration register descriptions will have an assigned attribute from the following table. Bits without a Sticky attribute are set to their default value by a hard reset.

Note: The table below is a comprehensive list of all possible attributes and included for completeness.

Table 1-2. Register Attributes Definitions (Sheet 1 of 2)

Attr	Description
RO	Read Only: These bits can only be read by software, writes have no effect. The value of the bits is determined by the hardware only.
RW	Read / Write: These bits can be read and written by software.
RC	Read Clear Variant: These bits can be read by software, and the act of reading them automatically clears them. HW is responsible for writing these bits, and therefore the -V modifier is implied.
W1S	Write 1 to Set: Writing a 1 to these bits will set them to 1. Writing 0 will have no effect. Reading will return indeterminate values and read ports are not required on the register. These are not supported by critter, and today is only allowed in the Cbo.
WO	Write Only: These bits can only be written by microcode, reads return indeterminate values. Microcode that wants to ensure this bit was written must read wherever the side-effect takes place.
RW-O	Read / Write Once: These bits can be read by software. After reset, these bits can only be written by software once, after which the bits becomes 'Read Only'.
RW-L	Read / Write Lock: These bits can be read and written by software. Hardware can make these bits 'Read Only' via a separate configuration bit or other logic.
RW1C	Read / Write 1 to Clear: These bits can be read and cleared by software. Writing a '1' to a bit clears it, while writing a '0' to a bit has no effect.



Table 1-2. Register Attributes Definitions (Sheet 2 of 2)

Attr	Description
ROS	RO Sticky: These bits can only be read by software, writes have no effect. The value of the bits is determined by the hardware only. These bits are only re-initialized to their default value by a PWRGOOD reset.
RW1S	Read, Write 1 to Set: These bits can be read. Writing a 1 to a given bit will set it to 1. Writing a 0 to a given bit will have no effect. It is not possible for software to set a bit to "0". The 1->0 transition can only be performed by hardware. These registers are implicitly -V.
RWS	R / W Sticky: These bits can be read and written by software. These bits are only re-initialized to their default value by a PWRGOOD reset.
RW1CS	R / W1C Sticky: These bits can be read and cleared by software. Writing a '1' to a bit clears it, while writing a '0' to a bit has no effect. These bits are only re-initialized to their default value by a PWRGOOD reset.
RW-LB	Read/Write Lock Bypass: Similar to RWL, these bits can be read and written by software. HW can make these bits "Read Only" via a separate configuration bit or other logic. However, RW-LB is a special case where the locking is controlled by the lock-bypass capability that is controlled by the lock-bypass enable bits. Each lock-bypass enable bit enables a set of config request sources that can bypass the lock. The requests sourced from the corresponding bypass enable bits will be lock-bypassed (i.e. RW) while requests sourced from other sources are under.
RO-FW	Read Only Forced Write: These bits are read only from the perspective of the cores. However, Pcode is able to write to these registers.
RWS-O	If a register is both sticky and "once" then the sticky value applies to both the register value and the "once" characteristic. Only a PWRGOOD reset will reset both the value and the "once" so that the register can be written to again.
RW-V	These bits may be modified by hardware. Typically, this occurs based on values from hardware configuration straps for functions such as DMI2 and PCIe I/O configuration. They also could be changed based on status or modes within internal state machines. Software cannot expect the values to stay unchanged. This is similar to "volatile" in software land
RWS-L	If a register is both sticky and locked, then the sticky behavior only applies to the value. The sticky behavior of the lock is determined by the register that controls the lock.
RV	Reserved: These bits are reserved for future expansion and their value must not be modified by software. When writing these bits, software must preserve the value read.

1.4 Protected Processor Inventory Number

Protected Processor Inventory Number (PPIN) is a solution for inventory management available on Intel Xeon processor E5 v2 product families for use in server platforms.







2 Integrated Memory Controller (iMC) Configuration Registers

2.1 Intel® Xeon® Processor E5 v2 Processor registers.

All Integrated Memory Controller registers listed below are specific to Intel® Xeon® Processor E5 v2 product families.

2.2 Intel® Xeon® Processor E5-2400 v2 Processor registers.

For Intel® Xeon® Processor E5-2400 v2 product families, ignore all registers in Device 15, Function 2, Device 16, Function 4 and Device 16, Function 6

2.3 Device 15 Function 0

	100h	SMB_STAT_0	180h
MH_MAINCNTL	104h	SMBCMD_0	184h
	108h	SMBCntL_0	188h
MH_SENSE_500NS_CFG	10Ch	SMB_TSOD_POLL_RATE_CNTR_0	18Ch
MH_DTYCYC_MIN_ASRT_CNTR_0	110h	SMB_STAT_1	190h
MH_DTYCYC_MIN_ASRT_CNTR_1	114h	SMBCMD_1	194h
MH_IO_500NS_CNTR	118h	SMBCntL_1	198h
MH_CHN_ASTN	11Ch	SMB_TSOD_POLL_RATE_CNTR_1	19Ch
MH_TEMP_STAT	120h	SMB_PERIOD_CFG	1A0h
MH_EXT_STAT	124h	SMB_PERIOD_CNTR	1A4h
	128h	SMB_TSOD_POLL_RATE	1A8h
	12Ch		1ACh
	130h		1B0h
	134h		1B4h
	138h		1B8h
	13Ch		1BCh
	140h		1C0h
	144h		1C4h
	148h		1C8h
	14Ch		1CCh
	150h		1D0h
	154h		1D4h
	158h		1D8h
	15Ch		1DCh
	160h		1E0h



Integrated Memory Controller (iMC) Configuration Registers

	164h		1E4h
	168h		1E8h
	16Ch		1ECh
	170h		1F0h
	174h		1F4h
	178h		1F8h
	17Ch		1FCh



2.3.1 pxpcap

PCI Express Capability.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x40		Function: 0	
Bit	Attr	Default	Description
29:25	RO	0x0	Interrupt Message Number (interrupt_message_number): N/A for this device
24:24	RO	0x0	Slot Implemented (slot_implemented): N/A for integrated endpoints
23:20	RO	0x9	Device/Port Type (device_port_type): Device type is Root Complex Integrated Endpoint
19:16	RO	0x1	Capability Version (capability_version): PCI Express Capability is Compliant with Version 1.0 of the PCI Express Spec. Note: This capability structure is not compliant with Versions beyond 1.0, since they require additional capability registers to be reserved. The only purpose for this capability structure is to make enhanced configuration space available. Minimizing the size of this structure is accomplished by reporting version 1.0 compliancy and reporting that this is an integrated root port device. As such, only three Dwords of configuration space are required for this structure.
15:8	RO	0x0	Next Capability Pointer (next_ptr): Pointer to the next capability. Set to 0 to indicate there are no more capability structures.
7:0	RO	0x10	Capability ID (capability_id): Provides the PCI Express capability ID assigned by PCI-SIG.

2.3.2 mcmtr

MC Memory Technology

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x7c		Function: 0	
Bit	Attr	Default	Description
19:16	RW_LB	0x0	CHN_DISABLE(chn_disable): Channel disable control. When set, the corresponding channel is disabled. Note: Message Channel may not work if all channels are set to disable in this field.
14:14	RW_LB	0x0	RSVD:



Integrated Memory Controller (iMC) Configuration Registers

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x7c		Function: 0	
Bit	Attr	Default	Description
13:12	RW_LB	0x0	<p>IMC_MODE (imc_mode):</p> <p>Memory mode:</p> <ul style="list-style-type: none"> 00: Native DDR3 01: Reserved 10: Reserved 11: Reserved
11:10	RW_LB	0x0	<p>CPGC_IOSAV (trng_mode):</p> <ul style="list-style-type: none"> 00: IOSAV mode 01: Reserved 10: Reserved 11: Normal Mode <p>Converged Pattern Generation and Checking (CPGC) is described in the System Agent BIOS specification.</p>
9:9	RW_LB	0x0	<p>Enabling the bank xor address mapping (bank_xor_enable):</p> <p>When set, this bit will enable bank XOR'ing. This is targeted at workloads that bank thrashing caused by certain stride or page mappings. If one detects unexpectedly poor page hit rates, one can attempt to flip this bit to see if it helps.</p> <p>0: Our base configuration. Bank selection is done using rank address bits 12:17:18 for open page mapping and bits 6:7:8 for close page mapping.</p> <p>1: Bank XOR'ing enabled. Bank selection is done using rank address bits: (12^19): (17^20): (18^21) for open page mapping (6^19): (7^20): (8^21) for close page mapping</p>
8:8	RW_LB	0x0	<p>NORMAL (normal):</p> <ul style="list-style-type: none"> 0: Training mode 1: Normal Mode
3:3	RW_LBV	0x0	<p>DIR_EN (dir_en):</p> <p>If the directory disable fuse is set to directory disable state, this register bit is set to Read-Only (RO) with 0 value, i.e. directory is disabled. When this bit is set to zero, MC ECC code will use the non-directory CRC-16. If the directory disable fuse is not blown, i.e. directory is not disabled, the DIR_EN bit can be set by BIOS, MC ECC will use CRC-15 in the first 32B code word to yield one directory bit. It is important to know that changing this bit will require BIOS to re-initialize the memory</p>
2:2	RW_LBV	0x0	<p>ECC_EN (ecc_en):</p> <p>ECC enable.</p> <p>DISECC will force override this bit to 0.</p>
1:1	RW_LBV	0x0	<p>LS_EN (ls_en):</p> <p>Use lock-step channel mode if set; otherwise, independent channel mode. This field should only be set for native ddr3 lockstep.</p> <p>Note: This bit will only work if the SKU is enabled for this feature.</p>
0:0	RW_LB	0x0	<p>CLOSE_PG (close_pg):</p> <p>Use close page address mapping if set; otherwise, open page.</p>



2.3.3 tadwayness_[0:11]

TAD Range Wayness, Limit and Target.

There are total of 12 TAD ranges ($N + P + 1$ = number of TAD ranges; P = how many times channel interleave changes within the SAD ranges.).

Note for mirroring configuration:

For 1-way interleave, channel 0-2 mirror pair: target list <0,2,x,x>, TAD ways = "00"

For 1-way interleave, channel 1-3 mirror pair: target list <1,3,x,x>, TAD ways = "00"

For 2-way interleave, 0-2 mirror pair and 1-3 mirror pair: target list <0,1,2,3>, TAD ways = "01"

For 1-way interleave, lockstep mirroring, target list <0,2,x,x>, TAD ways = "00"

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x80, 0x84, 0x88, 0x8c, 0x90, 0x94, 0x98, 0x9c, 0xa0, 0xa4, 0xa8, 0xac		Function: 0	
Bit	Attr	Default	Description
31:12	RW_LB	0x0	TAD_LIMIT (tad_limit): highest address of the range in system address space, 64MB granularity, i.e. TADRANGLIMIT[45:26].
11:10	RW_LB	0x0	TAD_SKT_WAY (tad_skt_way): socket interleave wayness 00 = 1 way, 01 = 2 way, 10 = 4 way, 11 = 8 way.
9:8	RW_LB	0x0	TAD_CH_WAY (tad_ch_way): channel interleave wayness 00 - interleave across 1 channel or mirror pair 01 - interleave across 2 channels or mirror pairs 10 - interleave across 3 channels 11 - interleave across 4 channels This parameter effectively tells iMC how much to divide the system address by when adjusting for the channel interleave. Since both channels in a pair store every line of data, divide by 1 when interleaving across one pair and 2 when interleaving across two pairs. For HA, it tells how many channels to distribute the read requests across. When interleaving across 1 pair, this distributes the reads to two channels, when interleaving across 2 pairs, this distributes the reads across 4 pairs. Writes always go to both channels in the pair when the read target is either channel.
7:6	RW_LB	0x0	TAD_CH_TGT3 (tad_ch_tgt3): target channel for channel interleave 3 (used for 4-way TAD interleaving). This register is used in the iMC only for reverse address translation for logging sparepatrol errors, converting a rank address back to a system address.
5:4	RW_LB	0x0	TAD_CH_TGT2 (tad_ch_tgt2): target channel for channel interleave 2 (used for 3/4-way TAD interleaving).



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x80, 0x84, 0x88, 0x8c, 0x90, 0x94, 0x98, 0x9c, 0xa0, 0xa4, 0xa8, 0xac		Function: 0	
Bit	Attr	Default	Description
3:2	RW_LB	0x0	TAD_CH_TGT1 (tad_ch_tgt1): target channel for channel interleave 1 (used for 2/3/4-way TAD interleaving).
1:0	RW_LB	0x0	TAD_CH_TGT0 (tad_ch_tgt0): target channel for channel interleave 0 (used for 1/2/3/4-way TAD interleaving).

2.3.4 mcmtr2

MC Memory Technology Register 2

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xb0		Function: 0	
Bit	Attr	Default	Description
3:0	RW_L	0x0	MONROE_CHN_FORCE_SR (monroe_chn_force_sr): Monroe Technology software channel force SRcontrol. When set, the corresponding channel is ignoring the ForceSRExit. A new transaction arrive at this channel will still cause the SR exit.

2.3.5 mc_init_state_g

Initialization state for boot, training and IOSAV.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xb4		Function: 0	
Bit	Attr	Default	Description
14:14	RWS_L	0x0	reset_io_vmse_rhs: Training Reset for DDRIO.
13:13	RWS_L	0x0	RSVD
12:9	RWS_L	0x0	cs_oe_en:
8:8	RWS_L	0x1	MC is in SR (safe_sr): This bit indicates if it is safe to keep the MC in SR during MC-reset. If it is clear when reset occurs, it means that the reset is without warning and the DDR-reset should be asserted. If set when reset occurs, it indicates that DDR is already in SR and it can keep it this way. This bit can also indicate MRC if reset without warning has occurred, and if it has, cold-reset flow should be selected. BIOS need to clear this bit at MRC entry.



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xb4		Function: 0	
Bit	Attr	Default	Description
7:7	RW_L	0x0	MRC_DONE (mrc_done): This bit indicates the PCU that the MRC is done, MC is in normal mode, ready to serve MRC should set this bit when MRC is done, but it doesn't need to wait until training results are saved in BIOS flash.
6:6	RW_L	0x0	Micro Break Point Synchronization (ubp_sync):
5:5	RW_L	0x1	DDRIO Reset (internal logic) (reset_io): Training Reset for DDRIO. <u>It resets TX/RX FIFO pointers, and some read related FSMs inside MCIO.</u> It goes to both the left and right DDRIO blocks on MC on Intel Xeon processor E5 Product family-based platforms. Make sure this bit is cleared before enabling DDRIO.
4:4	RW_L	0x1	IOSAV sequence channel sync (sync_iosav): This bit is used in order to sync the IOSAV operation in four channels. It is expect the BIOS to clear the bit after IOSAV test. Clearing the bit during test may lead to unknown behavior. By setting it four channels get the enable together.
3:3	RW_L	0x0	Refresh Enable (refresh_enable): If cold reset, this bit should be set by BIOS after 1) Initializing the refresh timing parameters 2) Running DDR through reset ad init sequence. If warm reset or S3 exit, this bit should be set immediately after SR exit.
2:2	RW_L	0x0	DCLK Enable (for all channels) (dclk_enable):
1:1	RW_L	0x1	DDR_RESET (ddr_reset): <u>DIMM reset.</u> <u>In EP and EP-2HA mode, the bit in MCO controls all channels</u>

2.3.6 rcomp_timer

RCOMP wait timer.

Defines the time from IO starting to run RCOMP evaluation until RCOMP results are definitely ready. This counter is added in order to keep determinism of the process if operated in different mode.

This register also indicates that first RCOMP has been done.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xc0		Function: 0	
Bit	Attr	Default	Description
31:31	RW_V	0x0	rcomp_in_progress: rcomp in progress status bit
21:21	RW	0x0	ignore_mdll_locked_bit Ignore DDRIO MDLL lock status during rcomp when set:



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xc0		Function: 0	
Bit	Attr	Default	Description
20:20	RW	0x0	no_mdll_fsm_override: Do not force DDRIO MDLL on during rcomp when set
16:16	RW_LV	0x0	First RCOMP has been done in DDRIO (first_rcomp_done): This is a status bit that indicates the first RCOMP has been completed. It is cleared on reset, and set by MC HW when the first RCOMP is completed. Bios should wait until this bit is set before executing any DDR command Locked by the inverted output of MCMMAIN.PSMI_QSC_CNTL.FORCERW
15:0	RW	0xc00	COUNT (count): DCLK cycle count that MC needs to wait from the point it has triggered RCOMP evaluation until it can trigger the load to registers The setting need be doubled if any associated DDRIO has its CSR GDCRCompOvr5.GDCPerChanCompCR set to 1 The setting need be further doubled if any associated DDRIO has its CSR GDCRMscCtl.RCompFilterFreqCfg set to a non-zero value

2.3.7 mh_maincntl

MEMHOT Main Control.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x104		Function: 0	
Bit	Attr	Default	Description
18:18	RW	0x0	MHOT_EXT_SMI_EN (mhot_ext_smi_en): Generate SMI event when either MEM_HOT[1:0]# is externally asserted.
17:17	RW	0x0	MHOT_SMI_EN (mhot_smi_en): Generate SMI during internal MEM_HOT# event assertion
16:16	RW	0x0	Enabling external MEM_HOT sensing logic (mh_sense_en): Externally asserted MEM_HOT sense control enable bit. When set, the MEM_HOT sense logic is enabled.
15:15	RW	0x1	Enabling mem_hot output generation logic (mh_output_en): MEMHOT output generation logic enable control. When 0, the MEM_HOT output generation logic is disabled, i.e. MEM_HOT[1:0]# outputs are in de-asserted state, no assertion regardless of the memory temperature. Sensing of externally asserted MEM_HOT[1:0]# is not affected by this bit. iMC will always reset the MH1_DIMM_VAL and MHO_DIMM_VAL bits in the next DCLK so there is no impact to the PCODE update to the MH_TEMP_STAT registers. When 1, the MEM_HOT output generation logic is enabled.



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x104		Function: 0	
Bit	Attr	Default	Description
14:12	RW	0x6	MEM_HOT DUTY CYCLE RATE CONTROL DIVIDER (mh_duty_cyc_rate_cntl): Controlling the MEMHOT decrement counter rate. This field defines the number of bits to be right-shifted from the MH_DUTY_CYCLE_PRD value. When MH_DUTY_CYCLE_RATE_CNTL 0, the MH_DUTY_CYCLE_RATE = MH_DUTY_CYCLE_PRD / 1 1, the MH_DUTY_CYCLE_RATE = MH_DUTY_CYCLE_PRD / 2 2, the MH_DUTY_CYCLE_RATE = MH_DUTY_CYCLE_PRD / 4 3, the MH_DUTY_CYCLE_RATE = MH_DUTY_CYCLE_PRD / 8 4, the MH_DUTY_CYCLE_RATE = MH_DUTY_CYCLE_PRD / 16 5, the MH_DUTY_CYCLE_RATE = MH_DUTY_CYCLE_PRD / 32 6, the MH_DUTY_CYCLE_RATE = MH_DUTY_CYCLE_PRD / 64 7, the MH_DUTY_CYCLE_RATE = MH_DUTY_CYCLE_PRD / 128
11:8	RW	0x0	MH_DUTY_CYCLE_RATE (mh_duty_cyc_rate): MEM_HOT decrement counter rate control field. The delta temperature is subtracted by MH_DUTY_CYCLE_RATE. If the subtraction result is greater than zero, the corresponding MEM_HOT# is asserted; otherwise, the MEM_HOT# is de-asserted. By setting this field to zero, the MEM_HOT becomes level mode.
7:0	RW	0x1f	MH_BASE_TEMP (mh_base_temp): MEM_HOT base temperature. The base temp is subtracted from the hottest DIMM temp to obtain a relative temperature substituted to zero if negative. The delta temperature is used to generate the MEM_HOT#.

2.3.8 mh_sense_500ns_cfg

MEMHOT Sense and 500 ns Config.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x10c		Function: 0	
Bit	Attr	Default	Description
25:16	RW	0xc8	MH_SENSE_PERIOD (mh_sense_period): MEMHOT Input Sense Period in number of CNTR_500_NANOSEC. BIOS calculate number of CNTR_500_NANOSEC for 50 micro-sec / 100 micro-sec / 200 micro-sec / 400 micro-sec.
15:13	RW	0x2	MH_IN_SENSE_ASSERT (mh_in_sense_assert): MEMHOT Input Sense Assertion Time in number of CNTR_500_NANOSEC. BIOS calculate number of CNTR_500_NANOSEC for 1 micro-sec / 2 micro-sec inputsense duration Here is MH_IN_SENSE_ASSERT ranges: 0 or 1 Reserved 2 - 7 1 micro-sec - 3.5 micro-sec sense assertion time in 500nsec increment



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x10c		Function: 0	
Bit	Attr	Default	Description
9:0	RWS	0x190	<p>CNFG_500_NANOSEC (cnfg_500_nanosec):</p> <p>500ns equivalent in DCLK. BIOS calculate number of DCLK to be equivalent to 500 nanoseconds. This value is loaded into CNTR_500_NANOSEC when it is decremented to zero. For pre-Si validation, minimum 2 can be set to speed up the simulation.</p> <p>The following are the recommended CNFG_500_NANOSEC values based from each DCLK frequency:</p> <p>DCLK = 400 MHz, CNFG_500_NANOSEC = 0C8h DCLK = 533 MHz, CNFG_500_NANOSEC = 10Ah DCLK = 667 MHz, CNFG_500_NANOSEC = 14Dh DCLK = 800 MHz, CNFG_500_NANOSEC = 190h DCLK = 933 MHz, CNFG_500_NANOSEC = 1D2h</p>

2.3.9 mh_dtycyc_min_asrt_cntr_[0:1]

MEMHOT Duty Cycle Period and Min Assertion Counter.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x110, 0x114		Function: 0	
Bit	Attr	Default	Description
31:20	RO_V	0x0	<p>MH_MIN_ASRTN_CNTR (mh_min_asrtn_cntr):</p> <p>MEM_HOT[1:0]# Minimum Assertion Time Current Count in number of CNTR_500_NANOSEC decrement by 1 every CNTR_500_NANOSEC. When the counter is zero, the counter is remain at zero and it is only loaded with MH_MIN_ASRTN only when MH_DUTY_CYC_PRD_CNTR is reloaded.</p>
19:0	RW_LV	0x0	<p>MH_DUTY_CYC_PRD_CNTR (mh_duty_cyc_prd_cntr):</p> <p>MEM_HOT[1:0]# DUTY Cycle Period Current Count in number of CNTR_500_NANOSEC decrement by 1 every CNTR_500_NANOSEC. When the counter is zero, the next cycle is loaded with MH_DUTY_CYC_PRD. PMSI pause (at quiescence) and resume (at wipe).</p>



2.3.10 mh_io_500ns_cntr

MEMHOT Input Output and 500 ns Counter.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x118		Function: 0	
Bit	Attr	Default	Description
31:22	RW_LV	0x0	<p>MH1_IO_CNTR (mh1_io_cntr):</p> <p>MEM_HOT[1:0]# Input Output Counter in number of CNTR_500_NANOSEC. When MH0_IO_CNTR is zero, the counter is loaded with MH_SENSE_PERIOD in the next CNTR_500_NANOSEC. When count is greater than MH_IN_SENSE_ASSERT, the MEM_HOT1# output driver may be turn on if the corresponding MEM_HOT#event is asserted. The receiver is turned off during this time. When count is equal or less than MH_IN_SENSE_ASSERT, MEM_HOT[1:0]# output is disabled and receiver is turned on. Hardware will decrement this counter by 1 every time CNTR_500_NANOSEC is decremented to zero. When the counter is zero, the next CNTR_500_NANOSEC count is loaded with MH_IN_SENSE_ASSERT. This counter is subject to PMSI pause (at quiescence) and resume (at wipe).</p>
21:12	RW_LV	0x0	<p>MH0_IO_CNTR (mh0_io_cntr):</p> <p>MEM_HOT[1:0]# Input Output Counter in number of CNTR_500_NANOSEC. When MH_IO_CNTR is zero, the counter is loaded with MH_SENSE_PERIOD in the next CNTR_500_NANOSEC. When count is greater than MH_IN_SENSE_ASSERT, the MEM_HOT[1:0]# output driver may be turn on if the corresponding MEM_HOT#event is asserted. The receiver is turned off during this time. When count is equal or less than MH_IN_SENSE_ASSERT, MEM_HOT[1:0]# output is disabled and receiver is turned on. BIOS calculate number of CNTR_500_NANOSEC hardware will decrement this register by 1 every CNTR_500_NANOSEC. When the counter is zero, the next CNTR_500_NANOSEC count is loaded with MH_IN_SENSE_ASSERT. This counter is subject to PMSI pause (at quiescence) and resume (at wipe).</p>
9:0	RW_LV	0x0	<p>CNTR_500_NANOSEC (cntr_500_nanosec):</p> <p>500 ns base counters used for the MEMHOT counters and the SMBus counters. BIOS calculate number of DCLK to be equivalent to 500 nanoseconds. CNTR_500_NANOSEC hardware will decrement this register by 1 every CNTR_500_NANOSEC. When the counter is zero, the next CNTR_500_NANOSEC count is loaded with CNTR_500_NANOSEC. This counter is subject to PMSI pause (at quiescence) and resume (at wipe).</p>

2.3.11 mh_chn_astn

MEMHOT Domain Channel Association.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x11c		Function: 0	
Bit	Attr	Default	Description
23:20	RO	0xb	<p>MH1_2ND_CHN_ASTN (mh1_2nd_chn_astn):</p> <p>MemHot[1]# 2nd Channel Association bit 23: is valid bit. Note: Valid bit means the association is valid and it does not implies the channel is populated.</p> <p>bit 22-20: 2nd channel ID within this MEMHOT domain.</p> <p>Note: This register is hardcoded in design. It is read-accessible by firmware. Design must make sure this register is not removed by downstream tools.</p>



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x11c		Function: 0	
Bit	Attr	Default	Description
19:16	RO	0xa	MH1_1ST_CHN_ASTN (mh1_1st_chn_astn): MemHot[1]# 1st Channel Association bit 19: is valid bit. Note: Valid bit means the association is valid and it does not implies the channel is populated. bit 18-16: 1st channel ID within this MEMHOT domain Note: This register is hardcoded in design. It is read-accessible by firmware. Design must make sure this register is not removed by downstream tools.
7:4	RO	0x9	MHO_2ND_CHN_ASTN (mh0_2nd_chn_astn): MemHot[0]# 2nd Channel Association bit 7: is valid bit. Note: Valid bit means the association is valid and it does not implies the channel is populated. bit 6-4: 2nd channel ID within this MEMHOT domain Note: This register is hardcoded in design. It is read-accessible by firmware. Design must make sure this register is not removed by downstream tools.
3:0	RO	0x8	MHO_1ST_CHN_ASTN (mh0_1st_chn_astn): MemHot[0]# 1st Channel Association bit 3: is valid bit. Note: Valid bit means the association is valid and it does not implies the channel is populated or exist. bit 2-0: 1st channel ID within this MEMHOT domain Note: This register is hardcoded in design. It is read-accessible by firmware. Design must make sure this register is not removed by downstream tools.

2.3.12 mh_temp_stat

MEMHOT TEMP Status.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x120		Function: 0	
Bit	Attr	Default	Description
31:31	RW_V	0x0	MH1_DIMM_VAL (mh1_dimm_val): Valid if set. PCODE search the hottest DIMM temperature and write the hottest temperature and the corresponding Hottest DIMM CID/ID and set the valid bit. MEMHOT hardware logic process the corresponding MEMHOT data when there is a MEMHOT event. Upon processing, the valid bit is reset. PCODE can write over existing valid temperature since a valid temperature may not occur during a MEMHOT event. If PCODE set the valid bit occur at the same cycle that the MEMHOT logic processing and try to clear, the PCODE set will dominate since it is a new temperature is updated while processing logic tries to clear an existing temperature.
30:28	RW	0x0	MH1_DIMM_CID (mh1_dimm_cid): Hottest DIMM Channel ID for MEM_HOT[1]#. PCODE search the hottest DIMM temperature and write the hottest temperature and the corresponding Hottest DIMM CID/ID.
27:24	RW	0x0	MH1_DIMM_ID (mh1_dimm_id): Hottest DIMM ID for MEM_HOT[1]#. PCODE search the hottest DIMM temperature and write the hottest temperature and the corresponding Hottest DIMM CID/ID.



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x120		Function: 0	
Bit	Attr	Default	Description
23:16	RW	0x0	<p>MH1_TEMP (mh1_temp):</p> <p>Hottest DIMM Sensor Reading for MEM_HOT[1]# - This reading represents the temperature of the hottest DIMM. PCODE search the hottest DIMM temperature and write the hottest temperature and the corresponding Hottest DIMM CID/ID. Note: iMC hardware load this value into the MEMHOT duty cycle generator counter since PCODE may update this field at different rate/time. This field is ranged from 0 to 127, i.e. the most significant bit is always zero.</p>
15:15	RW_V	0x0	<p>MHO_DIMM_VAL (mh0_dimm_val):</p> <p>Valid if set. PCODE search the hottest DIMM temperature and write the hottest temperature and the corresponding Hottest DIMM CID/ID and set the valid bit. MEMHOT hardware logic process the corresponding MEMHOT data when there is a MEMHOT event. Upon processing, the valid bit is reset. PCODE can write over existing valid temperature since a valid temperature may not occur during a MEMHOT event. If PCODE set the valid bit occur at the same cycle that the MEMHOT logic processing and try to clear, the PCODE set will dominate since it is a new temperature is updated while processing logic tries to clear an existing temperature.</p>
14:12	RW	0x0	<p>MHO_DIMM_CID (mh0_dimm_cid):</p> <p>Hottest DIMM Channel ID for MEM_HOT[0]#. PCODE search the hottest DIMM temperature and write the hottest temperature and the corresponding Hottest DIMM CID/ID.</p>
11:8	RW	0x0	<p>MHO_DIMM_ID (mh0_dimm_id):</p> <p>Hottest DIMM ID for MEM_HOT[0]#. PCODE search the hottest DIMM temperature and write the hottest temperature and the corresponding Hottest DIMM CID/ID.</p>
7:0	RW	0x0	<p>MHO_TEMP (mh0_temp):</p> <p>Hottest DIMM Sensor Reading for MEM_HOT[0]# - This reading represents the temperature of the hottest DIMM. PCODE search the hottest DIMM temperature and write the hottest temperature and the corresponding Hottest DIMM CID/ID. Note: iMC hardware load this value into the MEMHOT duty cycle generator counter since PCODE may update this field at different rate/time. This field is ranged from 0 to 127, that is, the most significant bit is always zero.</p>

2.3.13 mh_ext_stat

Capture externally asserted MEM_HOT[1:0]# assertion detection.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x124		Function: 0	
Bit	Attr	Default	Description
1:1	RW1C	0x0	<p>MH_EXT_STAT_1 (mh_ext_stat_1):</p> <p>MEM_HOT[1]# assertion status at this sense period. Set if MEM_HOT[1]# is asserted externally for this sense period, this running status bit will automatically updated with the next sensed value in the next MEMHOT input sense phase.</p>



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x124		Function: 0	
Bit	Attr	Default	Description
0:0	RW1C	0x0	MH_EXT_STAT_0 (mh_ext_stat_0): MEM_HOT[0]# assertion status at this sense period. Set if MEM_HOT[0]# is asserted externally for this sense period, this running status bit will automatically updated with the next sensed value in the next MEMHOT input sense phase.

2.3.14 smb_stat_[0:1]

SMBus Status

This register provides the interface to the SMBus/I2C* SCL and SDA signals that is used to access the Serial Presence Detect EEPROM (SPD) or Thermal Sensor on DIMM (TSOD) that defines the technology, configuration, and speed of the DIMMs controlled by iMC.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x180,		Function: 0	
Bit	Attr	Default	Description
31:31	RO_V	0x0	SMB_RDO (smb_rdo): Read Data Valid This bit is set by iMC when the Data field of this register receives read data from the SPD/TSOD after completion of an SMBus read command. It is cleared by iMC when a subsequent SMBus read command is issued.
30:30	RO_V	0x0	SMB_WOD (smb_wod): Write Operation Done This bit is set by iMC when a SMBus Write command has been completed on the SMBus. It is cleared by iMC when a subsequent SMBus Write command is issued.
29:29	RO_V	0x0	SMB_SBE (smb_sbe): SMBus Error This bit is set by iMC if an SMBus transaction (including the TSOD polling or message channel initiated SMBus access) that does not complete successfully (non-Ack has been received from slave at expected Ack slot of the transfer). If a slave device is asserting clock stretching, iMC does not have logic to detect this condition to set the SBE bit directly; however, the SMBus master will detect the error at the corresponding transaction's expected ACK slot. Once SMBUS_SBE bit is set, iMC stops issuing hardware initiated TSOD polling SMBUS transactions until the SMB_SBE is cleared. iMC will not increment the SMB_STAT_x.TSOD_SA until the SMB_SBE is cleared. Manual SMBus command interface is not affected, i.e. new command issue will clear the SMB_SBE like A0 silicon behavior.



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x180,		Function: 0	
Bit	Attr	Default	Description
28:28	ROS_V	0x0	<p>SMB_BUSY (smb_busy):</p> <p>SMBus Busy state. This bit is set by iMC while an SMBus/I2C command (including TSOD command issued from IMC hardware) is executing. Any transaction that is completed normally or gracefully will clear this bit automatically. By setting the SMB_SOFT_RST will also clear this bit.</p> <p>This register bit is sticky across reset so any surprise reset during pending SMBus operation will sustain the bit assertion across surprised warm-reset. BIOS reset handler can read this bit before issuing any SMBus transaction to determine whether a slave device may need special care to force the slave to idle state (e.g. via clock override toggling SMB_CKOV RD and/or via induced time-out by asserting SMB_CKOV RD for 25-35ms).</p>
27:24	RO_V	0x7	<p>Last Issued TSOD Slave Address (tsod_sa):</p> <p>This field captures the last issued TSOD slave address. Here is the slave address and the DDR CHN and DIMM slot mapping:</p> <p>Slave Address: 0 -- Channel: Even Chn; Slot #: 0 Slave Address: 1 -- Channel: Even Chn; Slot #: 1 Slave Address: 2 -- Channel: Even Chn; Slot #: 2 Slave Address: 3 -- Channel: Even Chn; Slot #: 3 (reserved) Slave Address: 4 -- Channel: Odd Chn; Slot #: 0 Slave Address: 5 -- Channel: Odd Chn; Slot #: 1 Slave Address: 6 -- Channel: Odd Chn; Slot #: 2 Slave Address: 7 -- Channel: Odd Chn; Slot #: 3 (reserved)</p> <p>A value of 8 in this register indicates to poll MXB temperature rather than a DIMM temperature, values above 0x8 are invalid.</p> <p>Since this field only captures the TSOD polling slave address. During SMB error handling, software should check the hung SMB_TSOD_POLL_EN state before disabling the SMB_TSOD_POLL_EN in order to qualify whether this field is valid.</p>
15:0	RO_V	0x0	<p>SMB_RDATA (smb_rdata):</p> <p>Read DataHolds data read from SMBus Read commands.</p> <p>Since TSOD/EEPROM are I2C* devices and the byte order is MSByte first in a word read, reading of I2C using word read should return SMB_RDATA[15:8] = I2C_MSB and SMB_RDATA[7:0] = I2C_LSB. If reading of I2C using byte read, the SMB_RDATA[15:8] = dont care; SMB_RDATA[7:0] = readbyte.</p> <p>If we have a SMB slave connected on the bus, reading of the SMBus slave using word read should return SMB_RDATA[15:8] = SMB_LSB and SMB_RDATA[7:0] = SMB_MSB.</p> <p>If the software is not sure whether the target is I2C or SMBus slave, please use byte access.</p>



2.3.15 smbcmd_[0:1]

A write to this register initiates a DIMM EEPROM access through the SMBus/I2C.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x184,		Function: 0	
Bit	Attr	Default	Description
31:31	RW_V	0x0	<p>SMB_CMD_TRIGGER (smb_cmd_trigger):</p> <p>CMD trigger: After setting this bit to 1, the SMBus master will issue the SMBus command using the other fields written in SMBCMD_[0:1] and SMCBcntl_[0:1]. Note: the '-V' in the attribute implies the hardware will reset this bit when the SMBus command is being started.</p>
30:30	RWS	0x0	<p>SMB_PNTR_SEL (smb_pntr_sel):</p> <p>Pointer Selection: SMBus/I2C present pointer based access enable when set; otherwise, use random access protocol. Hardware based TSOD polling will also use this bit to enable the pointer word read.</p> <p>Important Note: Cpu hardware based TSOD polling can be configured with pointer based access. If software manually issue SMBus transaction to other address, i.e. changing the pointer in the slave device, it is software's responsibility to restore the pointer in each TSOD before returning to hardware based TSOD polling while keeping the SMB_PNTR_SEL = 1.</p>
29:29	RWS	0x0	<p>SMB_WORD_ACCESS (smb_word_access):</p> <p>word access: SMBus/I2C word 2B access when set; otherwise, it is a byte access.</p>
28:28	RWS	0x0	<p>SMB_WRT_PNTR (smb_wrt_pntr):</p> <p>Bit[28:27] = 00: SMBus Read</p> <p>Bit[28:27] = 01: SMBus Write</p> <p>Bit[28:27] = 10: illegal combination</p> <p>Bit[28:27] = 11: Write to pointer register SMBus/I2C pointer update (byte). bit 30, and 29 are ignored. Note: SMCBcntl_[0:1] [26] will NOT disable WrtPntr update command.</p>
27:27	RWS	0x0	<p>SMB_WRT_CMD (smb_wrt_cmd):</p> <p>When '0', it's a read command</p> <p>When '1', it's a write command</p>
26:24	RWS	0x0	<p>SMB_SA (smb_sa):</p> <p>Slave Address: This field identifies the DIMM SPD/TSOD to be accessed.</p>
23:16	RWS	0x0	<p>SMB_BA (smb_ba):</p> <p>Bus Txn Address: This field identifies the bus transaction address to be accessed.</p> <p>Note: in WORD access, 23:16 specifies 2B access address. In Byte access, 23:16 specified 1B access address.</p>



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x184,		Function: 0	
Bit	Attr	Default	Description
15:0	RWS	0x0	<p>SMB_WDATA (smb_wdata):</p> <p>Write Data: Holds data to be written by SPDW commands.</p> <p>Since TSOD/EEPROM are I2C devices and the byte order is MSByte first in a word write, writing of I2C using word write should use SMB_WDATA[15:8] = I2C_MSB and SMB_WDATA[7:0] = I2C_LSB. If writing of I2C using byte write, the SMB_WDATA[15:8] = dont care; SMB_WDATA[7:0] = writebyte.</p> <p>If we have a SMB slave connected on the bus, writing of the SMBus slave using word write should use SMB_WDATA[15:8] = SMB_LSB and SMB_WDATA[7:0] = SMB_MSB.</p> <p>It is software responsibility to figure out the byte order of the slave access.</p>

2.3.16 smbcntl_[0:1]

SMBus Control.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x188,		Function: 0	
Bit	Attr	Default	Description
31:28	RWS	0xa	<p>SMB_DTI (smb_dti):</p> <p>Device Type Identifier: This field specifies the device type identifier. Only devices with this device-type will respond to commands.</p> <p>'0011' specifies TSOD.</p> <p>'1010' specifies EEPROM's.</p> <p>'0110' specifies a write-protect operation for an EEPROM.</p> <p>Other identifiers can be specified to target non-EEPROM devices on the SMBus.</p> <p>Note: IMC based hardware TSOD polling uses hardcoded DTI. Changing this field has no effect on the hardware based TSOD polling.</p>
27:27	RWS_V	0x1	<p>SMB_CKOVrd (smb_ckovrd):</p> <p>Clock Override</p> <p>'0' Clock signal is driven low, overriding writing a '1' to CMD.</p> <p>'1' Clock signal is released high, allowing normal operation of CMD.</p> <p>Toggleing this bit can be used to 'budge' the port out of a 'stuck' state.</p> <p>Software can write this bit to 0 and the SMB_SOFT_RST to 1 to force hung SMBus controller and the SMB slaves to idle state without using power good reset or warm reset.</p> <p>Note: Software need to set the SMB_CKOVrd back to 1 after 35ms in order to force slave devices to time-out in case there is any pending transaction. The corresponding SMB_STAT_x.SMB_SBE error status bit may be set if there was such pending transaction time-out (non-graceful termination). If the pending transaction was a write operation, the slave device content may be corrupted by this clock override operation. A subsequent SMB command will automatically cleared the SMB_SBE.</p> <p>iMC added SMBus time-out control timer in B0. When the time-out control timer expired, the SMBCKOVrd# will "de-assert", i.e. return to 1 value and clear the SMBSBE0.</p>



Integrated Memory Controller (iMC) Configuration Registers

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x188,		Function: 0	
Bit	Attr	Default	Description
26:26	RW_LB	0x1	<p>SMB_DIS_WRT (smb_dis_wrt):</p> <p>Disable SMBus Write</p> <p>Writing a '0' to this bit enables CMD to be set to 1; Writing a 1 to force CMD bit to be always 0, i.e. disabling SMBus write. This bit can only be written in SMMode. SMBus Read is not affected. I2C Write Pointer Update Command is not affected.</p> <p>Important Note to BIOS: Since BIOS is the source to update SMBCNTL_x register initially after reset, it is important to determine whether the SMBus can have write capability before writing any upper bits (bit24-31) via byte-enable config write (or writing any bit within this register via 32b config write) within the SMBCNTL register.</p>
23:23	RW	0x0	<p>smb_sbe_en:</p> <p>SMBus error recovery enable if set; otherwise, A0 behavior.</p>
22:22	RW	0x0	<p>smb_sbe_smi_en:</p> <p>Enable SMI generation when SMB_SBE is 0 -- 1.</p>
21:21	RW	0x0	<p>smb_sbe_err0_en:</p> <p>Enable ERR0 assertion when SMB_SBE is 0 -- 1.</p>
10:10	RW	0x0	<p>SMB_SOFT_RST (smb_soft_rst):</p> <p>SMBus software reset strobe to graceful terminate pending transaction after ACK and keep the SMB from issuing any transaction until this bit is cleared. If slave device is hung, software can write this bit to 1 and the SMB_CKOVRD to 0 (for more than 35ms) to force hung the SMB slaves to time-out and put it in idle state without using power good reset or warm reset.</p> <p>Note: Software need to set the SMB_CKOVRD back to 1 after 35ms in order to force slave devices to time-out in case there is any pending transaction. The corresponding SMB_STAT_x.SMB_SBE error status bit may be set if there was such pending transaction time-out (non-graceful termination). If the pending transaction was a write operation, the slave device content may be corrupted by this clock override operation. A subsequent SMB command will automatically cleared the SMB_SBE.</p> <p>If the IMC HW perform SMB time-out with the SMB_SBE_EN = 1. Software should simply clear the SMB_SBE and SMB_SOFT_RST sequentially after writing the SMB_CKOVRD = 0 and SMB_SOFT_RST = 1 asserting clock override and perform graceful txn termination. Hardware will automatically de-assert the SMB_CKOVRD update to 1 after the pre-configured 35ms/65ms time-out.</p>
8:8	RW_LB	0x0	<p>SMB_TSOD_POLL_EN (smb_tsod_poll_en):</p> <p>TSOD polling enable</p> <p>'0': disable TSOD polling and enable SPDCMD accesses.</p> <p>'1': disable SPDCMD access and enable TSOD polling.</p> <p>It is important to make sure no pending SMBus transaction and the TSOD polling must be disabled (and pending TSOD polling must be drained) before changing the TSOD_POLL_EN.</p>



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x188,		Function: 0	
Bit	Attr	Default	Description
7:0	RW_LB	0x0	<p>TSOD_PRESENT for the lower and upper channels (tsod_present):</p> <p>DIMM slot mask to indicate whether the DIMM is equipped with TSOD sensor.</p> <p>Bit 7: must be programmed to zero. Upper channel slot #3 is not supported</p> <p>Bit 6: TSOD PRESENT at upper channel (ch 1 or ch 3) slot #2</p> <p>Bit 5: TSOD PRESENT at upper channel (ch 1 or ch 3) slot #1</p> <p>Bit 4: TSOD PRESENT at upper channel (ch 1 or ch 3) slot #0</p> <p>Bit 3: must be programmed to zero. Lower channel slot #3 is not supported</p> <p>Bit 2: TSOD PRESENT at lower channel (ch 0 or ch 2) slot #2</p> <p>Bit 1: TSOD PRESENT at lower channel (ch 0 or ch 2) slot #1</p> <p>Bit 0: TSOD PRESENT at lower channel (ch 0 or ch 2) slot #0</p>

2.3.17 smb_tsod_poll_rate_cntr_[0:1]

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x18c,		Function: 0	
Bit	Attr	Default	Description
17:0	RW_LV	0x0	<p>SMB_TSOD_POLL_RATE_CNTR (smb_tsod_poll_rate_cntr):</p> <p>TSOD poll rate counter. When it is decremented to zero, reset to zero or written to zero, SMB_TSOD_POLL_RATE value is loaded into this counter and appear the updated value in the next DCLK.</p>

2.3.18 smb_period_cfg

SMBus Clock Period Config.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x1a0		Function: 0	
Bit	Attr	Default	Description
31:16	RWS	0x445c	<p>smb_tlow_timeout:</p> <p>Upper 16b of the 18b SMBus Time-Out Timer Configuration in unit of MH_SENSE_500NS_CFG.CNFG_500_NANOSEC. The lower 2b of the 18b counter config is always 00.</p> <p>Assuming the CNFG_500_NANOSEC is set at 500 ns: For 35 ms time out, please configure this register to 445°C For 65 ms time out, please configure this register to 7EF4</p>



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x1a0		Function: 0	
Bit	Attr	Default	Description
15:0	RWS	0xfa0	<p>SMB_CLK_PRD (smb_clk_prd):</p> <p>This field specifies both SMBus Clock in number of DCLK. Note: In order to generate a 50% duty cycle SCL, half of the SMB_CLK_PRD is used to generate SCL high. SCL must stay low for at least another half of the SMB_CLK_PRD before pulling high. It is recommend to program an even value in this field since the hardware is simply doing a right shift for the divided by 2 operation. For pre-Si validation, minimum 8 can be set to speed up the simulation.</p> <p>Note the 100 KHz SMB_CLK_PRD default value is calculated based on 800 MTs (400 MHz) DCLK.</p>

2.3.19 smb_period_cntr

SMBus Clock Period Counter.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x1a4		Function: 0	
Bit	Attr	Default	Description
31:16	RO_V	0x0	<p>SMB1_CLK_PRD_CNTR (smb1_clk_prd_cntr):</p> <p>SMBus #1 Clock Period Counter for Ch 23. This field is the current SMBus Clock Period Counter Value.</p>
15:0	RO_V	0x0	<p>SMB0_CLK_PRD_CNTR (smb0_clk_prd_cntr):</p> <p>SMBus #0 Clock Period Counter for Ch 01. This field is the current SMBus Clock Period Counter Value.</p>

2.3.20 smb_tsod_poll_rate

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x1a8		Function: 0	
Bit	Attr	Default	Description
17:0	RWS	0x3e800	<p>SMB_TSOD_POLL_RATE (smb_tsod_poll_rate):</p> <p>TSOD poll rate configuration between consecutive TSOD accesses to the TSOD devices on the same SMBus segment. This field specifies the TSOD poll rate in number of 500 ns per CNFG_500_NANOSEC register field definition.</p>

2.4 Device 15 Function 1

DID		VID		0h	SPAREADDRESSLO	80h
PCISTS		PCICMD		4h		84h
CCR			RID	8h		88h
BIST	HDR	PLAT	CLSR	Ch		8Ch



				10h	SPARECTL	90h
				14h	SSRSTATUS	94h
				18h	SCRUBADDRESSLO	98h
				1Ch	SCRUBADDRESSHI	9Ch
				20h	SCRUBCTL	A0h
				24h		A4h
				28h	SPAREINTERVAL	A8h
SDID	SVID	2Ch	RASENABLES	ACh		
				30h		B0h
				CAPPTR	34h	SMISPARECTL
				38h	LEAKY_BUCKET_CFG	B8h
				MAXLAT	MINGNT	INTPIN
PXPCAP				40h	LEAKY_BUCKET_CNTR_LO	C0h
				44h	LEAKY_BUCKET_CNTR_HI	C4h
				48h		C8h
				4Ch		CCh
				50h		D0h
				54h		D4h
				58h		D8h
				5Ch		DCh
				60h		E0h
				64h		E4h
				68h		E8h
				6Ch		ECh
				70h		F0h
				74h		F4h
				78h		F8h
7Ch		FCh				

2.4.1 pxpcap

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x40		Function: 1	
Bit	Attr	Default	Description
29:25	RO	0x0	Interrupt Message Number (interrupt_message_number): NA for this device
24:24	RO	0x0	Slot Implemented (slot_implemented): NA for integrated endpoints
23:20	RO	0x9	Device/Port Type (device_port_type): Device type is Root Complex Integrated Endpoint



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x40		Function: 1	
Bit	Attr	Default	Description
19:16	RO	0x1	<p>Capability Version (capability_version):</p> <p>PCI Express Capability is Compliant with Version 1.0 of the PCI Express Spec.</p> <p>Note: This capability structure is not compliant with Versions beyond 1.0, since they require additional capability registers to be reserved. The only purpose for this capability structure is to make enhanced configuration space available. Minimizing the size of this structure is accomplished by reporting version 1.0 compliancy and reporting that this is an integrated root port device. As such, only three Dwords of configuration space are required for this structure.</p>
15:8	RO	0x0	<p>Next Capability Pointer (next_ptr):</p> <p>Pointer to the next capability. Set to 0 to indicate there are no more capability structures.</p>
7:0	RO	0x10	<p>Capability ID (capability_id):</p> <p>Provides the PCI Express capability ID assigned by PCI-SIG.</p>

2.4.2 spareaddresslo

Spare Address Low

Always points to the lower address for the next sparing operation. This register will not be affected by the HA access to the spare source rank during the HA window.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x80		Function: 1	
Bit	Attr	Default	Description
30:0	RW_LV	0x0	<p>RANKADD (rankadd):</p> <p>Always points to the lower address for the next sparing operation. This register will not be affected by the HA access to the spare source rank during the HA window.</p>



2.4.3 sparectl

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x90		Function: 1	
Bit	Attr	Default	Description
29:29	RW_LB	0x0	<p>DisWPQWM (diswpqwm):</p> <p>Disable WPQ level based water mark, so that sparing wm is only based on HaFifoWM.</p> <p>If DisWPQWM is clear, the spare window is started when the number of hits to the failed DIMM exceed max (# of credits in WPQ not yet returned to the HA, HaFifoWM)</p> <p>If DisWPQWM is set, the spare window starts when the number of hits to the failed DIMM exceed HaFifoWM.</p> <p>In either case, if the number of hits to the failed DIMM do not hit the WM, the spare window will still start after SPAREINTERVAL.NORMOPDUR timer expiration.</p>
28:24	RW_LB	0x0	<p>HaFifoWM (hafifowm):</p> <p>minimum water mark for HA writes to failed rank. Actual wm is max of WPQ credit level and HaFifoWM. When wm is hit the HA is backpressured and a sparing window is started.</p> <p>If DisWPQWM is clear, the spare window is started when the number of hits to the failed DIMM exceed max (# of credits in WPQ not yet returned to the HA, HaFifoWM)</p> <p>If DisWPQWM is set, the spare window starts when the number of hits to the failed DIMM exceed HaFifoWM.</p>
23:16	RW	0x0	<p>SCRATCH_PAD (scratch_pad):</p> <p>This field is available as a scratch pad for SSR operations</p>
10:8	RW_LB	0x0	<p>DST_RANK (dst_rank):</p> <p>Destination logical rank used for the memory copy.</p>
6:4	RW_LB	0x0	<p>SRC_RANK (src_rank):</p> <p>Source logical rank that provides the data to be copied.</p>
3:2	RW_LB	0x0	<p>CHANNEL SELECT FOR THE SPARE COPY (chn_sel):</p> <p>Since there is only one spare-copy logic for all channels, this field selects the channel or channel-pair for the spare-copy operation.</p> <p>For independent channel operation: 00 = channel 0 is selected for the spare-copy operation 01 = channel 1 is selected for the spare-copy operation 10 = channel 2 is selected for the spare-copy operation 11 = channel 3 is selected for the spare-copy operation</p> <p>For lock-step channel operation: 0x = channel 0 and channel 1 are selected for the spare-copy operation 1x = channel 2 and channel 3 are selected for the spare-copy operation</p>
0:0	RW_LBV	0x0	<p>SPARE_ENABLE (spare_enable):</p> <p>Spare enable when set to 1. Hardware clear after the sparing completion.</p>



2.4.4 ssrstatus

Provides the status of a spare-copy memory Init operation.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x94		Function: 1	
Bit	Attr	Default	Description
2:2	RW1C	0x0	PATCMPLT (patcmplt): All memory has been scrubbed. Hardware sets this bit each time the patrol engine steps through all memory locations. If software wants to monitor 0 --> 1 transition after the bit has been set, the software will need to clear the bit by writing a one to clear this bit in order to distinguish the next patrol scrub completion. Clearing the bit will not affect the patrol scrub operation.
1:1	RO_V	0x0	SPRCMPLT (sprcmplt): Spare Operation Complete. Set by hardware once operation is complete. Bit is cleared by hardware when a new operation is enabled. Note: just before MC release the HA block prior to the completion of the sparing operation, iMC logic will automatically update the corresponding RIR_RNK_TGT target to reflect new DST_RANK.
0:0	RO_V	0x0	SPRINPROGRESS (sprinprogress): Spare Operation in progress. This bit is set by hardware once operation has started. It is cleared once operation is complete or fails.

2.4.5 scrubaddresslo

Scrub Address Low.

This register contains part of the address of the last patrol scrub request issued. When running memtest, the failing address is logged in this register on memtest errors. Software can write the next address to be scrubbed into this register. The STARTSCRUB bit will then trigger the specified address to be scrubbed. Patrol scrubs must be disabled to reliably write this register.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x98		Function: 1	
Bit	Attr	Default	Description
30:0	RW_V	0x0	RANKADD (rankadd): Contains the rank address of the last scrub issued. Can be written to specify the next scrub address with STARTSCRUB. RESTRICTIONS: Patrol Scrubs must be disabled when writing to this field.

2.4.6 scrubaddresshi

Scrub Address High.

This register pair contains part of the address of the last patrol scrub request issued. Software can write the next address into this register. Scrubbing must be disabled to reliably read and write this register. The STARTSCRUB bit will then trigger the specified address to be scrubbed.



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x9c		Function: 1	
Bit	Attr	Default	Description
11:10	RW_V	0x0	CHNL (chnl): Can be written to specify the next scrub address with STARTSCRUB. This register is updated with channel address of the last scrub address issued. Restriction: Patrol Scrubs must be disabled when writing to this field.
7:4	RW_V	0x0	RANK (rank): Contains the physical rank ID of the last scrub issued. Can be written to specify the next scrub address with STARTSCRUB. RESTRICTION: Patrol Scrubs must be disabled when writing to this field.

2.4.7 scrubctl

This register contains the Scrub control parameters and status.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xa0		Function: 1	
Bit	Attr	Default	Description
31:31	RW_L	0x0	Scrub Enable (scrub_en): Scrub Enable when set.
30:30	RW	0x0	Stop on complete (stop_on_cmpl): Stop patrol scrub at end of memory range. This mode is meant to be used as part of memory migration flow. SMI is signalled by default
29:29	RW_V	0x0	patrol range complete (ptl_cmpl): When stop_on_cmpl is enabled, patrol will stop at the end of the address range and set this bit. Patrol will resume from beginning of address range when this bit or stop_on_cmpl is cleared by BIOS and patrol scrub is still enabled by scrub_en.
28:28	RW	0x0	Stop on error (stop_on_err): Stop patrol scrub on poison or uncorrectable. On poison, patrol will log error then stop. On uncorr, patrol will convert to poison if enabled then stop. This mode is meant to be used as part of memory migration flow. SMI is signalled by default.
27:27	RW_V	0x0	patrol stopped (ptl_stopped): When stop_on_err is set, patrol will stop on error and set this bit. Patrol will resume at the next address when this bit or stop_on_err is cleared by BIOS and patrol scrub is still enabled by scrub_en.
26:26	RW_V	0x0	SCRUBISSUED (scrubissued): When Set, the scrub address registers contain the last scrub address issued
25:25	RW	0x0	ISSUEONCE (issueonce): When Set, the patrol scrub engine will issue the address in the scrub address registers only once and stop.



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xa0		Function: 1	
Bit	Attr	Default	Description
24:24	RW_V	0x0	STARTSCRUB (startscrub): When Set, the Patrol scrub engine will start from the address in the scrub address registers. Once the scrub is issued this bit is reset.
23:0	RW	0x0	SCRUBINTERVAL (scrubinterval): Defines the interval in DCLKS between patrol scrub requests. The calculation for this register to get a scrub to every line in 24 hours is: 3640memory capacity64cycle time of DCLK. RESTRICTIONS: Can only be changed when patrol scrubs are disabled.

2.4.8 spareinterval

Defines the interval between normal and sparing operations. Interval is defined in dclk.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xa8		Function: 1	
Bit	Attr	Default	Description
28:16	RW	0x320	NUMSPARE (numspare): Sparing operation duration. System requests will be blocked during this interval and only sparing copy operations will be serviced.
15:0	RW	0xc80	NORMAL OPERATION DURATION (normopdur): Normal operation duration. System requests will be serviced during this interval.

2.4.9 rasenables

RAS Enables Register

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xac		Function: 1	
Bit	Attr	Default	Description
0:0	RW_LB	0x0	MIRROREN (mirroren): Mirror mode enable. The channel mapping must be set up before this bit will have an effect on iMC operation. This changes the error policy.



2.4.10 smisparectl

System Management Interrupt and Spare control register.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xb4		Function: 1	
Bit	Attr	Default	Description
17:17	RW	0x0	INTRPT_SEL_PIN (intrpt_sel_pin): Enable pin signaling. When set the interrupt is signaled via the ERROR_N[0] pin to get the attention of a BMC.
16:16	RW	0x0	INTRPT_SEL_CMCI (intrpt_sel_cmci): (CMCI used as a proxy for NMI signaling). Set to enable NMI signaling. Clear to disable NMI signaling. If both NMI and SMI enable bits are set then only SMI is sent
15:15	RW	0x0	INTRPT_SEL_SMI (intrpt_sel_smi): SMI enable. Set to enable SMI signaling. Clear to disable SMI signaling.

2.4.11 leaky_bucket_cfg

The leaky bucket is implemented as a 53-bit DCLK counter. The upper 42-bit of the 53-bit counter is captured in LEAKY_BUCKET_CNTR_LO and LEAKY_BUCKET_CNTR_HI registers. The carry "strobe" from the not-shown least significant 11-bit counter will trigger this 42-bit counter-pair to count. LEAKY_BUCKET_CFG contains two hot encoding thresholds LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO. The 42-bit counter-pair is compared with the two thresholds pair specified by LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO.



Integrated Memory Controller (iMC) Configuration Registers

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xb8		Function: 1	
Bit	Attr	Default	Description
11:6	RW	0x0	<p>LEAKY_BKT_CFG_HI (leaky_bkt_cfg_hi):</p> <p>This is the higher order bit select mask of the two hot encoding threshold. The value of this field specify the bit position of the mask:</p> <p>00h: reserved 01h: LEAKY_BUCKET_CNTR_LO bit 1, i.e. bit 12 of the full 53b counter ... 1Fh: LEAKY_BUCKET_CNTR_LO bit 31, i.e. bit 42 of the full 53b counter 20h: LEAKY_BUCKET_CNTR_HI bit 0, i.e. bit 43 of the full 53b counter ... 29h: LEAKY_BUCKET_CNTR_HI bit 9, i.e. bit 52 of the full 53b counter 2Ah - 3F: reserved</p> <p>When both counter bits selected by the LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO are set, the 53b leaky bucket counter will be reset and the logic will generate a primary leak Strobe which is used by a 2-bit LEAKY_BKT_2ND_CNTR. LEAKY_BKT_2ND_CNTR_LIMIT specifies the value to generate LEAK pulse which is used to decrement the correctable error counter by 1 as shown below:</p> <p>LEAKY_BKT_2ND_CNTR_LIMIT LEAK pulse to decrement CE counter by 1 00b (default): 4 x Primary leak strobe (four times the value programmed by the LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO) 01b: 1x Primary leak strobe (same as the value programmed by the LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO) 10b: 2x Primary leak strobe (two times the value programmed by the LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO) 11b: 3x Primary leak strobe (two times the value programmed by the LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO)</p> <p>Note: A value of all zeroes in LEAKY_BUCKET_CFG register is equivalent to no leaky bucketing MRC BIOS must program this register to any non-zero value before switching to NORMAL mode.</p>



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xb8		Function: 1	
Bit	Attr	Default	Description
5:0	RW	0x0	<p>LEAKY_BKT_CFG_LO (leaky_bkt_cfg_lo):</p> <p>This is the lower order bit select mask of the two hot encoding threshold. The value of this field specify the bit position of the mask:</p> <p>00h: reserved</p> <p>01h: LEAKY_BUCKET_CNTR_LO bit 1, i.e. bit 12 of the full 53b counter</p> <p>...</p> <p>1Fh: LEAKY_BUCKET_CNTR_LO bit 31, i.e. bit 42 of the full 53b counter</p> <p>20h: LEAKY_BUCKET_CNTR_HI bit 0, i.e. bit 43 of the full 53b counter</p> <p>...</p> <p>29h: LEAKY_BUCKET_CNTR_HI bit 9, i.e. bit 52 of the full 53b counter</p> <p>2Ah - 3F: reserved</p> <p>When both counter bits selected by the LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO are set, the 53b leaky bucket counter will be reset and the logic will generate a primary leak Strobe which is used by a 2-bit LEAKY_BKT_2ND_CNTR. LEAKY_BKT_2ND_CNTR_LIMIT specifies the value to generate LEAK pulse which is used to decrement the correctable error counter by 1 as shown below:</p> <p>LEAKY_BKT_2ND_CNTR_LIMIT LEAK pulse to decrement CE counter by 1</p> <p>00b (default): 4 x Primary leak strobe (four times the value programmed by the LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO)</p> <p>01b: 1x Primary leak strobe (same as the value programmed by the LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO)</p> <p>10b: 2x Primary leak strobe (two times the value programmed by the LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO)</p> <p>11b: 3x Primary leak strobe (two times the value programmed by the LEAKY_BKT_CFG_HI and LEAKY_BKT_CFG_LO)</p> <p>Note: A value of all zeroes in LEAKY_BUCKET_CFG register is equivalent to no leaky bucketing</p> <p>MRC BIOS must program this register to any non-zero value before switching to NORMAL mode.</p>

2.4.12 leaky_bucket_cntr_lo

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xc0		Function: 1	
Bit	Attr	Default	Description
31:0	RW_V	0x0	<p>Leaky Bucket Counter Low (leaky_bkt_cntr_lo):</p> <p>This is the lower half of the leaky bucket counter. The full counter is actually a 53b "DCLK" counter. There is a least significant 11b of the 53b counter is not captured in CSR. The carry "strobe" from the not-shown least significant 11b counter will trigger this 42b counter pair to count. The 42b counter-pair is compared with the two-hot encoding threshold specified by the LEAKY_BUCKET_CFG_HI and LEAKY_BUCKET_CFG_LO pair. When the counter bits specified by the LEAKY_BUCKET_CFG_HI and LEAKY_BUCKET_CFG_LO are both set, the 53b counter is reset and the leaky bucket logic will generate a LEAK strobe last for 1 DCLK.</p>



2.4.13 leaky_bucket_cntr_hi

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0xc4		Function: 1	
Bit	Attr	Default	Description
9:0	RW_V	0x0	<p>Leaky Bucket Counter High Limit (leaky_bkt_cntr_hi):</p> <p>This is the upper half of the leaky bucket counter. The full counter is actually a 53b "DCLK" counter. There is a least significant 11b of the 53b counter is not captured in CSR. The carry "strobe" from the not-shown least significant 11b counter will trigger this 42b counter-pair to count. The 42b counter-pair is compared with the two-hot encoding threshold specified by the LEAKY_BUCKET_CFG_HI and LEAKY_BUCKET_CFG_LO pair. When the counter bits specified by the LEAKY_BUCKET_CFG_HI and LEAKY_BUCKET_CFG_LO are both set, the 53b counter is reset and the leaky bucket logic will generate a LEAK strobe last for 1 DCLK.</p>

2.5 Device 15 Functions 2-5

DID		VID		0h	DIMMMTR_0	80h
PCISTS		PCICMD		4h	DIMMMTR_1	84h
CCR			RID	8h	DIMMMTR_2	88h
BIST	HDR	PLAT	CLSR	Ch		8Ch
				10h		90h
				14h		94h
				18h		98h
				1Ch		9Ch
				20h		A0h
				24h		A4h
				28h		A8h
SDID		SVID		2Ch		ACh
				30h		B0h
			CAPPTR	34h		B4h
				38h		B8h
MAXLAT	MINGNT	INTPIN	INTL	3Ch		BCh
PXPCAP				40h		C0h
				44h		C4h
				48h		C8h
				4Ch		CCh
				50h		D0h
				54h		D4h
				58h		D8h
				5Ch		DCh
				60h		E0h
				64h		E4h
				68h		E8h



	6Ch	ECh
	70h	F0h
	74h	F4h
	78h	F8h
	7Ch	FCh

2.5.1 pxpcap

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x40		Function: 2,3,4,5	
Bit	Attr	Default	Description
29:25	RO	0x0	Interrupt Message Number (interrupt_message_number): NA for this device
24:24	RO	0x0	Slot Implemented (slot_implemented): NA for integrated endpoints
23:20	RO	0x9	Device/Port Type (device_port_type): Device type is Root Complex Integrated Endpoint
19:16	RO	0x1	Capability Version (capability_version): PCI Express Capability is Compliant with Version 1.0 of the PCI Express Spec. Note: This capability structure is not compliant with Versions beyond 1.0, since they require additional capability registers to be reserved. The only purpose for this capability structure is to make enhanced configuration space available. Minimizing the size of this structure is accomplished by reporting version 1.0 compliancy and reporting that this is an integrated root port device. As such, only three Dwords of configuration space are required for this structure.
15:8	RO	0x0	Next Capability Pointer (next_ptr): Pointer to the next capability. Set to 0 to indicate there are no more capability structures.
7:0	RO	0x10	Capability ID (capability_id): Provides the PCI Express capability ID assigned by PCI-SIG.

2.5.2 dimmmtr_[0:2]

DIMM Memory Technology.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x80, 0x84, 0x88		Function: 2,3,4,5	
Bit	Attr	Default	Description
20:20	RW_LB	0x0	rsvd:



Integrated Memory Controller (iMC) Configuration Registers

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x80, 0x84, 0x88		Function: 2,3,4,5	
Bit	Attr	Default	Description
19:16	RW_LB	0x0	<p>RANK_DISABLE control (rank_disable):</p> <p>RANK Disable Control to disable patrol, refresh and ZQCAL operation. This bit setting must be set consistently with TERM_RNK_MSK, i.e. both corresponding bits cannot be set at the same time. In the other word, a disabled rank must not be selected for the termination rank.</p> <p>RANK_DISABLE[3], i.e. bit 19: rank 3 disable. Note DIMMMTR_2.RANKDISABLE[3] is don't care since DIMM 2 must not be quad-rank</p> <p>RANK_DISABLE[2], i.e. bit 18: rank 2 disable. Note DIMMMTR_2.RANKDISABLE[2] is don't care since DIMM 2 must not be quad-rank</p> <p>RANK_DISABLE[1], i.e. bit 17: rank 1 disable</p> <p>RANK_DISABLE[0], i.e. bit 16: rank 0 disable</p> <p>when set, no patrol or refresh will be perform on this rank. ODT termination is not affected by this bit.</p>
14:14	RW_LB	0x0	<p>DIMM_POP (dimm_pop):</p> <p>DIMM populated if set; otherwise, unpopulated. If none of the fields from dimmmtr_0/1/2 is set, DDRIO DLL will not be enabled.</p>
13:12	RW_LB	0x0	<p>RANK_CNT (rank_cnt):</p> <p>00 - SR 01 - DR 10 - QR 11 - reserved</p>
8:7	RW_LB	0x0	<p>DDR3_WIDTH (ddr3_width):</p> <p>00 - x4 01 - x8 10 - x16 11 - reserved</p> <p>Used to determine if a configuration is capable of supporting DDDC.</p>
6:5	RW_LB	0x0	<p>DDR3_DNSTY (ddr3_dnsty):</p> <p>00 - 1 Gb 01 - 2 Gb 10 - 4 Gb 11 - 8 Gb</p>
4:2	RW_LB	0x0	<p>RA_WIDTH (ra_width):</p> <p>000 - reserved - 13 bits 010 - 14 bits 011 - 15 bits 100 - 16 bits 101 - 17 bits HDRL, if DISABLE_EXTENDED_ADDR_DIMM is 1, setting 101 is decoded as 100. (Such configuration is not supported) 110 - 18 bits HDRL, if DISABLE_EXTENDED_ADDR_DIMM is 1, setting 110 is decoded as 100. (Such configuration is not supported) 111: reserved</p>



Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x80, 0x84, 0x88		Function: 2,3,4,5	
Bit	Attr	Default	Description
1:0	RW_LB	0x0	CA_WIDTH (ca_width): 00 - 10 bits 01 - 11 bits 10 - 12 bits 11 - reserved

2.5.3 pxpenhcap

This field points to the next Capability in extended configuration space.

Type: CFG		PortID: N/A	
Bus: 1		Device: 15	
Offset: 0x100		Function: 2,3,4,5	
Bit	Attr	Default	Description
31:20	RO	0x0	Next Capability Offset (next_capability_offset):
19:16	RO	0x0	Capability Version (capability_version): Indicates there are no capability structures in the enhanced configuration space.
15:0	RO	0x0	Capability ID (capability_id): Indicates there are no capability structures in the enhanced configuration space.

2.6 Device 16 Functions 0, 1, 4, 5

DID		VID		0h		80h		
PCISTS		PCICMD		4h		84h		
CCR			RID	8h		88h		
BIST	HDR	PLAT	CLSR	Ch		8Ch		
				10h		90h		
				14h		94h		
				18h		98h		
				1Ch		9Ch		
				20h				
				24h		PmonCntr_0	A0h	
				28h		A4h		
SDID		SVID		2Ch	PmonCntr_1	A8h		
				30h		ACh		
				CAPPTR		34h	PmonCntr_2	B0h
						38h		B4h



Integrated Memory Controller (iMC) Configuration Registers

MAXLAT	MINGNT	INTPIN	INTL	3Ch	PmonCntr_3	B8h
PXPCAP				40h		BCh
				44h	PmonCntr_4	C0h
				48h		C4h
				4Ch		
				50h		
				54h	PmonCntr_Fixed	D0h
				58h		D4h
				5Ch	PmonCntrCfg_0	D8h
				60h	PmonCntrCfg_1	DCh
				64h	PmonCntrCfg_2	E0h
				68h	PmonCntrCfg_3	E4h
				6Ch	PmonCntrCfg_4	E8h
				70h		FOh
				74h	PmonUnitCtrl	F4h
				78h	PmonUnitStatus	F8h
				7Ch		FCh

	100h			180h
	104h			184h
CHN_TEMP_CFG	108h			188h
CHN_TEMP_STAT	10Ch			18Ch
DIMM_TEMP_OEM_0	110h	THRT_PWR_DIMM_1	THRT_PWR_DIMM_0	190h
DIMM_TEMP_OEM_1	114h		THRT_PWR_DIMM_2	194h
DIMM_TEMP_OEM_2	118h			198h
	11Ch			19Ch
DIMM_TEMP_TH_0	120h			1A0h
DIMM_TEMP_TH_1	124h			1A4h
DIMM_TEMP_TH_2	128h			1A8h
	12Ch			1ACh
DIMM_TEMP_THRT_LMT_0	130h			1B0h
DIMM_TEMP_THRT_LMT_1	134h			1B4h
DIMM_TEMP_THRT_LMT_2	138h			1B8h
	13Ch			1BCh
DIMM_TEMP_EV_OFST_0	140h			1C0h
DIMM_TEMP_EV_OFST_1	144h			1C4h
DIMM_TEMP_EV_OFST_2	148h			1C8h
	14Ch			1CCh
DIMMTEMPSTAT_0	150h			1D0h
DIMMTEMPSTAT_1	154h			1D4h
DIMMTEMPSTAT_2	158h			1D8h
	15Ch			1DCh
	160h			1E0h



	164h		1E4h
	168h		1E8h
	16Ch		1ECh
	170h		1F0h
	174h		1F4h
	178h		1F8h
	17Ch		1FCh

TCDBP	200h	MC_INIT_STAT_C	280h
TCRAP	204h		284h
TCRWP	208h		288h
TCOTHP	20Ch		28Ch
TCRFP	210h		290h
TCRFTP	214h		294h
TCSRFTP	218h		298h
TCMR2SHADOW	21Ch		29Ch
TCZOCAL	220h		2A0h
TCSTAGGER_REF	224h		2A4h
	228h		2A8h
TCMROSHADOW	22Ch		2ACh
	230h		2B0h
RPQAGE	234h		2B4h
IDLETIME	238h		2B8h
RDIMMTIMINGCNTL	23Ch		2BCh
RDIMMTIMINGCNTL2	240h		2C0h
TCMRS	244h		2C4h
	248h		2C8h
	24Ch		2CCh
	250h		2D0h
	254h		2D4h
	258h		2D8h
	25Ch		2DCh
	260h		2E0h
	264h		2E4h
	268h		2E8h
	26Ch		2ECh
	270h		2F0h
	274h		2F4h
	278h		2F8h
	27Ch		2FCh




2.6.1 pxpcap

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x40		Function: 0,1,4,5	
Bit	Attr	Default	Description
7:0	RO	0x10	Capability ID (capability_id): Provides the PCI Express capability ID assigned by PCI-SIG.

2.6.2 chn_temp_cfg

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x108		Function: 0,1,4,5	
Bit	Attr	Default	Description
31:31	RW	0x1	OLTT_EN (oltt_en): Enable OLTT temperature tracking
29:29	RW	0x0	CLTT_OR_PCODE_TEMP_MUX_SEL (cltt_or_pcode_temp_mux_sel): The TEMP_STAT byte update mux select control to direct the source to update DIMMTEMPSTAT_[0:3][7:0]:0: Corresponding to the DIMM TEMP_STAT byte from PCODE_TEMP_OUTPUT. 1: TSOD temperature reading from CLTT logic.
28:28	RW_O	0x1	CLTT_DEBUG_DISABLE_LOCK (cltt_debug_disable_lock): lock bit of DIMMTEMPSTAT_[0:3][7:0]: Set this lock bit to disable configuration write to DIMMTEMPSTAT_[0:3][7:0]. When this bit is clear, system debugtest software can update the DIMMTEMPSTAT_[0:3][7:0] to verify various temperature scenerios.
27:27	RW	0x1	Enables thermal bandwidth throttling limit (bw_limit_thrt_en):
23:16	RW	0x0	THRT_EXT (thrt_ext): Max number of throttled transactions to be issued during BWLIMITTF due to externally asserted MEMHOT#.
15:15	RW	0x0	THRT_ALLOW_ISOCH (thrt_allow_isoch): When this bit is zero, MC will lower CKE during Thermal Throttling, and ISOCH is blocked. When this bit is one, MC will NOT lower CKE during Thermal Throttling, and ISOCH will be allowed base on bandwidth throttling setting. However, setting this bit would mean more power consumption due to CKE is asserted during thermal or power throttling. This bit can be updated dynamically in independent channel configuration only. For lock-step configuration, this bit must be statically set during IOSAV mode before enabling the lock-step operation. Dynamic update in lock-step mode will put the two lock-stepped channels out-of-sync and cause functional failure or silent data corruption.
10:0	RW	0x3ff	BW_LIMIT_TF (bw_limit_tf): BW Throttle Window Size in DCLK



2.6.3 chn_temp_stat

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x10c		Function: 0,1,4,5	
Bit	Attr	Default	Description
3:3	RW1C	0x0	Event Asserted MXB (ev_asrt_mxb): Event Asserted on MXB
2:2	RW1C	0x0	Event Asserted on DIMM ID 2 (ev_asrt_dimm2): Event Asserted on DIMM ID 2
1:1	RW1C	0x0	Event Asserted on DIMM ID 1 (ev_asrt_dimm1): Event Asserted on DIMM ID 1
0:0	RW1C	0x0	Event Asserted on DIMM ID 0 (ev_asrt_dimm0): Event Asserted on DIMM ID 0

2.6.4 dimm_temp_oem_[0:2]

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x110, 0x114, 0x118		Function: 0,1,4,5	
Bit	Attr	Default	Description
26:24	RW	0x0	TEMP_OEM_HI_HYST (temp_oem_hi_hyst): Positive going Threshold Hysteresis Value. This value is subtracted from TEMPOEMHI to determine the point where the asserted status for that threshold will clear. Set to 00h if sensor does not support positive-going threshold hysteresis
18:16	RW	0x0	TEMP_OEM_LO_HYST (temp_oem_lo_hyst): Negative going Threshold Hysteresis Value. This value is added to TEMPOEMLO to determine the point where the asserted status for that threshold will clear. Set to 00h if sensor does not support negative-going threshold hysteresis.
15:8	RW	0x50	TEMP_OEM_HI (temp_oem_hi): Upper Threshold value - TCcase threshold at which to Initiate System Interrupt (SMI or MEMHOT#) at a + going rate. Note: The default value is listed in decimal.valid range: 32 - 127 in degree (C). Others: reserved.
7:0	RW	0x4b	TEMP_OEM_LO (temp_oem_lo): Lower Threshold Value - TCcase threshold at which to Initiate System Interrupt (SMI or MEMHOT#) at a - going rate. Note: the default value is listed in decimal.valid range: 32 - 127 in degree (C). Others: reserved.



2.6.5 dimm_temp_th_[0:2]

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x120, 0x124, 0x128		Function: 0,1,4,5	
Bit	Attr	Default	Description
26:24	RW	0x0	TEMP_THRT_HYST (temp_thrt_hyst): Positive going Threshold Hysteresis Value. Set to 00h if sensor does not support positive-going threshold hysteresis. This value is subtracted from TEMP_THRT_XX to determine the point where the asserted status for that threshold will clear.
23:16	RW	0x5f	TEMP_HI (temp_hi): TCase threshold at which to Initiate THRTCRIT and assert THERMTRIP# valid range: 32 - 127 in degree (C). Note: the default value is listed in decimal. FF: Disabled Others: reserved. TEMP_HI should be programmed so it is greater than TEMP_MID
15:8	RW	0x5a	TEMP_MID (temp_mid): TCase threshold at which to Initiate THRTHI and assert valid range: 32 - 127 in degree (C). Note: The default value is listed in decimal. FF: Disabled Others: reserved. TEMP_MID should be programmed so it is less than TEMP_HI
7:0	RW	0x55	TEMP_LO (temp_lo): TCase threshold at which to Initiate 2x refresh andor THRTMID and initiate Interrupt (MEMHOT#). Note: The default value is listed in decimal.valid range: 32 - 127 in degree (C). FF: Disabled Others: reserved. TEMP_LO should be programmed so it is less than TEMP_MID



2.6.6 dimm_temp_thrt_lmt_[0:2]

All three THRT_CRIT, THRT_HI and THRT_MID are per DIMM BW limit, i.e. all activities (ACT, READ, WRITE) from all ranks within a DIMM are tracked together in one DIMM activity counter.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x130, 0x134, 0x138		Function: 0,1,4,5	
Bit	Attr	Default	Description
23:16	RW	0x0	THRT_CRIT (thrt_crit): Max number of throttled transactions (ACT, READ, WRITE) to be issued during BWLIMITTF.
15:8	RW	0xf	THRT_HI (thrt_hi): Max number of throttled transactions (ACT, READ, WRITE) to be issued during BWLIMITTF.
7:0	RW	0xff	THRT_MID (thrt_mid): Max number of throttled transactions (ACT, READ, WRITE) to be issued during BWLIMITTF.

2.6.7 dimm_temp_ev_ofst_[0:2]

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x140, 0x144, 0x148		Function: 0,1,4,5	
Bit	Attr	Default	Description
31:24	RO	0x0	TEMP_AVG_INTRVL (temp_avg_intrvl): Temperature data is averaged over this period. At the end of averaging period (ms) , averaging process starts again. 0x1 - 0xFF Averaging data is read via TEMPDIMM STATUSREGISTER (Byte 1/2) as well as used for generating hysteresis based interrupts. 00 Instantaneous Data (non-averaged) is read via TEMPDIMM STATUSREGISTER (Byte 1/2) as well as used for generating hysteresis based interrupts. Note: Cpu does not support temp averaging.
14:14	RW	0x0	Initiate THRTMID on TEMPLO (ev_thrtmid_templo): Initiate THRTMID on TEMPLO
13:13	RW	0x1	Initiate 2X refresh on TEMPLO (ev_2x_ref_templo_en): Initiate 2X refresh on TEMPLO DIMM with extended temperature range capability will need double refresh rate in order to avoid data lost when DIMM temperature is above 85C but below 95C. Warning: If the 2x refresh is disable with extended temperature range DIMM configuration, system cooling and power thermal throttling scheme must guarantee the DIMM temperature will not exceed 85C.
12:12	RW	0x0	Assert MEMHOT Event on TEMPHI (ev_mh_temphi_en): Assert MEMHOT# Event on TEMPHI



Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x140, 0x144, 0x148		Function: 0,1,4,5	
Bit	Attr	Default	Description
11:11	RW	0x0	Assert MEMHOT Event on TEMPMID (ev_mh_tempmid_en): Assert MEMHOT# Event on TEMPMID
10:10	RW	0x0	Assert MEMHOT Event on TEMPLO (ev_mh_templo_en): Assert MEMHOT# Event on TEMPLO
9:9	RW	0x0	Assert MEMHOT Event on TEMPOEMHI (ev_mh_tempoemhi_en): Assert MEMHOT# Event on TEMPOEMHI
8:8	RW	0x0	Assert MEMHOT Event on TEMPOEMLO (ev_mh_tempoemlo_en): Assert MEMHOT# Event on TEMPOEMLO
3:0	RW	0x0	DIMM_TEMP_OFFSET (dimm_temp_offset): Bit 3-0 - Temperature Offset Register

2.6.8 dimmtempstat_[0:2]

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x150, 0x154, 0x158		Function: 0,1,4,5	
Bit	Attr	Default	Description
28:28	RW1C	0x0	Event Asserted on TEMPHI going HIGH (ev_asrt_temphi): Event Asserted on TEMPHI going HIGH It is assumed that each of the event assertion is going to trigger Configurable interrupt (Either MEMHOT# only or both SMI and MEMHOT#) defined in bit 30 of CHN_TEMP_CFG
27:27	RW1C	0x0	Event Asserted on TEMPMID going High (ev_asrt_tempmid): Event Asserted on TEMPMID going High It is assumed that each of the event assertion is going to trigger configurable interrupt (Either MEMHOT# only or both SMI and MEMHOT#) defined in bit 30 of CHN_TEMP_CFG
26:26	RW1C	0x0	Event Asserted on TEMPLO Going High (ev_asrt_templo): Event Asserted on TEMPLO Going High It is assumed that each of the event assertion is going to trigger Configurable interrupt (Either MEMHOT# only or both SMI and MEMHOT#) defined in bit 30 of CHN_TEMP_CFG
25:25	RW1C	0x0	Event Asserted on TEMPOEMLO Going Low (ev_asrt_tempoemlo): Event Asserted on TEMPOEMLO Going Low It is assumed that each of the event assertion is going to trigger Configurable interrupt (Either MEMHOT# only or both SMI and MEMHOT#) defined in bit 30 of CHN_TEMP_CFG



Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x150, 0x154, 0x158		Function: 0,1,4,5	
Bit	Attr	Default	Description
24:24	RW1C	0x0	Event Asserted on TEMPOEMHI Going High (ev_asrt_tempoemhi): Event Asserted on TEMPOEMHI Going High It is assumed that each of the event assertion is going to trigger Configurable interrupt (Either MEMHOT# only or both SMI and MEMHOT#) defined in bit 30 of CHN_TEMP_CFG
7:0	RW_LV	0x55	DIMM_TEMP (dimm_temp): Current DIMM Temperature for thermal throttlingLock by CLTT_DEBUG_DISABLE_LOCK When the CLTT_DEBUG_DISABLE_LOCK is cleared unlocked, debug software can write to this byte to test various temperature scenarios. When the CLTT_DEBUG_DISABLE_LOCK is set, this field becomes read-only, i.e. configuration write to this byte is aborted. This byte is updated from internal logic from a 2:1 Mux which can be selected from either CLTT temperature or from the corresponding temperature registers output (PCODE_TEMP_OUTPUT) updated from pcode. The mux select is controlled by CLTT_OR_PCODE_TEMP_MUX_SEL defined in CHN_TEMP_CFG register. Valid range from 0 to 127 i.e. 0C to +127C. Any negative value read from TSOD is forced to 0. TSOD decimal point value is also truncated to integer value. The default value is changed to 85C to avoid missing refresh during S3 resume or during warm-reset flow after the DIMM is exiting self-refresh. The correct temperature may not be fetched from TSOD yet but the DIMM temperature may be still high and need to be refreshed at 2x rate.

2.6.9 thrt_pwr_dimm_[0:2]

bit[10:0]: Max number of transactions (ACT, READ, WRITE) to be allowed during the 1 usec throttling timeframe per power throttling.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x190, 0x192, 0x194		Function: 0,1,4,5	
Bit	Attr	Default	Description
15:15	RW	0x1	THRT_PWR_EN (thrt_pwr_en): bit[15]: set to one to enable the power throttling for the DIMM.
11:0	RW	0xfff	Power Throttling Control (thrt_pwr): bit[11:0]: Max number of transactions (ACT, READ, WRITE) to be allowed (per DIMM) during the 1 micro-sec throttling timeframe per power throttling. PCODE can update this register dynamically.



2.6.10 tcdbp

Timing Constraints DDR3 Bin Parameter.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x200		Function: 0,1,4,5	
Bit	Attr	Default	Description
26:26	RW	0x0	cmd_oe_cs:
25:25	RW	0x0	cmd_oe_on:
24:19	RW	0x1c	T_RAS (t_ras):
18:14	RW	0x7	T_CWL (t_cwl):
13:9	RW	0xa	T_CL (t_cl):
8:5	RW	0xa	T_RP (t_rp):
4:0	RW	0xa	T_RCD (t_rcd):

2.6.11 tcrap

Timing Constraints DDR3 Regular Access Parameter.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x204		Function: 0,1,4,5	
Bit	Attr	Default	Description
31:30	RW	0x0	CMD_STRETCH (cmd_stretch): defines for how many cycles the command is stretched 00: 1N operation 01: Reserved 10: 2N operation 11: 3N operation
29:29	RW	0x0	CMD_3ST (cmd_3st): When cleared, command and address is driving only when required. When set, command and address are driving always, and the value when no valid command is the last command and address
28:24	RW	0xc	T_WR (t_wr): WRITE recovery time (must be at least 15ns equivalent)
23:22	RW	0x1	T_PRPDEN (t_prpden): tPRPDEN, tACTPDEN, tREFPDEN needs to have value of 2 for 2133. All 3 values will use this single value.
21:16	RW	0x20	T_FAW (t_faw): Four activate window (must be at least 4 * tRRD and at most 63)



Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x204		Function: 0,1,4,5	
Bit	Attr	Default	Description
15:12	RW	0x6	<p>T_WTR (t_wtr):</p> <p>DCLK delay from start of internal write transaction to internal read command (must be at least the larger value of 4 DCLK or 7.5ns)</p> <p>iMC's Write to Read Same Rank (T_WRSR) is automatically calculated based from TCDBP.T_CWL + 4 + T_WTR.</p> <p>For LRDIMM running in rank multiplication mode, iMC will continue to use the above equation for T_WRSR even if the WRITE and READ are targeting same logical rank but at different physical ranks behind the LRDIMM buffer. In the other word, iMC will not be able to dynamically switch to TWRDR timing. In order to avoid timing violation in this scenario, BIOS must configure the TWTR parameter to be the MAX (T_WTR of LRDIMM, (T_WDRD' - TCL + 2)). Note: Due to the lighter electrical loading behind the LRDIMM buffer, further optimization can be tuned during post-silicon to reduce the T_WDRD' parameter instead of directly using the TCRWP.T_WDRD parameter.</p>
11:8	RW	0x3	<p>T_CKE (t_cke):</p> <p>CKE minimum pulse width (must be at least the larger value of 3 DCLK or 5ns)</p>
7:4	RW	0xa	<p>T_RTP (t_rtp):</p> <p>Internal READ Command to PRECHARGE Command delay, (must be at least the larger value of 4 DCLK or 7.5ns)</p>
2:0	RW	0x5	<p>T_RRD (t_rrd):</p> <p>ACTIVE to ACTIVE command period, (must be at least the larger value of 4 DCLK or 6ns)</p>

2.6.12 tcrwp

Timing Constraints DDR3 Read Write Parameter.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x208		Function: 0,1,4,5	
Bit	Attr	Default	Description
31:30	RW	0x0	<p>T_WDRD_UPPER (t_wdrd_upper):</p> <p>Upper 2 bits bits 4:3 of twdr field.</p>
29:27	RW	0x0	<p>T_CCD (t_ccd):</p> <p>back to back READ to READ or CAS to CAS from same rank separation parameter. The actual JEDEC CAS to CAS command separation is (T_CCD + 4) DCLKs measured between the clock assertion edges of the two corresponding asserted command CS#.</p>
26:24	RW	0x2	<p>T_RWSR (t_rwsr):</p> <p>This field is not used in Intel® Xeon® Processor E5 v2. Please refer to TCOTHP2 for the new register field location.</p>



Integrated Memory Controller (iMC) Configuration Registers

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x208		Function: 0,1,4,5	
Bit	Attr	Default	Description
23:21	RW	0x2	<p>T_WRDD (t_wrdd):</p> <p>Back to back WRITE to READ from different DIMM separation parameter. The actual WRITE to READ command separation is</p> $TCDBP.T_CWL - TCDBP.TCL + T_WRDD + 6 \text{ DCLKs}$ <p>measured between the clock assertion edges of the two corresponding asserted command CS#.</p>
20:18	RW	0x2	<p>T_WRDR (t_wrdr):</p> <p>Back to back WRITE to READ from different RANK separation parameter. The actual WRITE to READ command separation is</p> $TCDBP.T_CWL - TCDBP.TCL + T_WRDR + 6 \text{ DCLKs}$ <p>measured between the clock assertion edges of the two corresponding asserted command CS#.</p>
17:15	RW	0x2	<p>T_RWDD (t_rwdd):</p> <p>This field is not used starting in Intel® Xeon® Processor E5 v2. Please refer to TCOTHP2 for the new register field location.</p>
14:12	RW	0x2	<p>T_RWDR (t_rwdr):</p> <p>This field is not used starting in Intel® Xeon® Processor E5 v2. Please refer to TCOTHP2 for the new register field location.</p>
11:9	RW	0x2	<p>T_WWDD (t_wwdd):</p> <p>Back to back WRITE to WRITE from different DIMM separation parameter. The actual WRITE to WRITE command separation is</p> $T_WWDD + 5 \text{ DCLKs}$ <p>measured between the clock assertion edges of the two corresponding asserted command CS#. Please note that the minimum setting of the field must meet the DDRIO requirement for WRITE to WRITE turnaround time to be at least 6 DCIk at the DDRIO pin.</p> <p>The maximum design range from the above calculation is 15.</p>
8:6	RW	0x2	<p>T_WWDR (t_wwdr):</p> <p>Back to back WRITE to WRITE from different RANK separation parameter. The actual WRITE to WRITE command separation is</p> $T_WWDR + 5 \text{ DCLKs}$ <p>measured between the clock assertion edges of the two corresponding asserted command CS#. Please note that the minimum setting of the field must meet the DDRIO requirement for WRITE to WRITE turnaround time to be at least 6 DCIk at the DDRIO pin.</p> <p>The maximum design range from the above calculation is 15.</p>
5:3	RW	0x2	<p>T_RRDD (t_rrdd):</p> <p>Back to back READ to READ from different DIMM separation parameter. The actual READ to READ command separation is</p> $TRRDD + 5 \text{ DCLKs}$ <p>measured between the clock assertion edges of the two corresponding asserted command CS#. Please note that the minimum setting of the field must meet the DDRIO requirement for READ to READ turnaround time to be at least 5 DCIk at the DDRIO pin.</p> <p>The maximum design range from the above calculation is 31.</p>



Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x208		Function: 0,1,4,5	
Bit	Attr	Default	Description
2:0	RW	0x2	<p>T_RRDR (t_rrdr):</p> <p>Back to back READ to READ from different RANK separation parameter. The actual READ to READ command separation is TRRDR + 5 DCLKs measured between the clock assertion edges of the two corresponding asserted command CS#. Please note that the minimum setting of the field must meet the DDRIO requirement for READ to READ turnaround time to be at least 5 DClk at the DDRIO pin.</p> <p>The maximum design range from the above calculation is 31.</p>

2.6.13 tcothp

Timing Constraints DDR3 Other Timing Parameter.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x20c		Function: 0,1,4,5	
Bit	Attr	Default	Description
31:28	RW	0x6	<p>t_cs_oe:</p> <p>When tcsoe0, CS9:0# will not tri-state Otherwise, this field defines delay in Dclks to disable CS output after all CKE pins are low</p>
27:24	RW	0x6	<p>t_odt_oe:</p> <p>When todtoe0, ODT will not tri-state Otherwise, this field defines delay in Dclks to disable ODT output after all CKE pins are low and either in self-refresh or in IBTOff mode</p>
23:20	RW	0x0	<p>t_rwsr:</p> <p>Do not use for Intel® Xeon® Processor E5 v2</p>
19:16	RW	0x0	<p>t_rwdd:</p> <p>Do not use for Intel® Xeon® Processor E5 v2</p>
15:12	RW	0x2	<p>t_rwdr:</p>
11:11	RW	0x0	<p>shift_odt_early:</p> <p>This shifts the ODT waveform one cycle early relative to the timing set up in the ODT_TBL2 register, when in 2N or 3N mode. This bit has no effect in 1N mode.</p>
10:8	RW	0x0	<p>T_CWL_ADJ (t_cwl_adj):</p> <p>This register defines additional WR data delay per channel in order to overcome the WR-flyby issue. The total CAS write latency that the DDR sees is the sum of T_CWL and the T_CWL_ADJ. 000 - no added latency default 001 - 1 Dclk of added latency 010 - 2 Dclk of added latency 011 - 3 Dclk of added latency 1xx - Reduced latency by 1 Dclk. Not supported at tCWL = 5</p>



Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x20c		Function: 0,1,4,5	
Bit	Attr	Default	Description
7:5	RW	0x3	T_XP (t_xp): Exit Power Down with DLL on to any valid command; Exit Precharge Power Down with DLL frozen to commands not requiring a locked DLL.
4:0	RW	0xa	T_XPDLL (t_xpdll): Exit Precharge Power Down with DLL frozen to commands requiring a locked DLL.

2.6.14 tcrfp

Timing Constraints DDR3 Refresh Parameter.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x210		Function: 0,1,4,5	
Bit	Attr	Default	Description
15:12	RW	0x9	REF_PANIC_WM (ref_panic_wm): tREFI count level in which the refresh priority is panic (default is 9) It is recommended to set the panic WM at least to 9, in order to utilize the maximum no-refresh period possible
11:8	RW	0x8	REF_HI_WM (ref_hi_wm): tREFI count level that turns the refresh priority to high (default is 8)
7:0	RW	0x3f	OREFNI (orefni): Rank idle period that defines an opportunity for refresh, in DCLK cycles

2.6.15 tcrftp

Timing Constraints Refresh Timing Parameter.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x214		Function: 0,1,4,5	
Bit	Attr	Default	Description
31:25	RW	0x9	T_REFIX9 (t_refix9): period of min between $9 * T_REFI$ and tRAS maximum (normally 70 micro-sec) in $1024 * DCLK$ cycles. The default value will need to reduce 100 DCLK cycles - uncertainty on timing of panic refresh



Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x214		Function: 0,1,4,5	
Bit	Attr	Default	Description
24:15	RW	0x80	<p>T_RFC (t_rfc):</p> <p>Time of refresh - from beginning of refresh until next ACT or refresh is allowed (in DCLK cycles)</p> <p>Here are the recommended T_RFC for 2Gb DDR3:</p> <p>0800 MT/s : 040h 1067 MT/s : 056h 1333 MT/s : 06Bh 1600 MT/s : 080h 1867 MT/s : 096h</p>
14:0	RW	0x62c	<p>T_REFI (t_refi):</p> <p>Defines the average period between refreshes in DCLK cycles. This register defines the upper 15b of the 16b tREFI counter limit. The least significant bit of the counter limit is always zero.</p> <p>Here are the recommended T_REFI[14:0] setting for 7.8 micro-sec:</p> <p>0800 MT/s : 0C30h 1067 MT/s : 1040h 1333 MT/s : 1450h 1600 MT/s : 1860h 1867 MT/s : 1C70h</p>

2.6.16 tcsrftp

Timing Constraints Self-Refresh Timing Parameter.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x218		Function: 0,1,4,5	
Bit	Attr	Default	Description
31:27	RW	0xc	<p>T_MOD (t_mod):</p> <p>Mode Register Set command update delay.</p>
25:16	RW	0x100	<p>T_ZQOPER (t_zqoper):</p> <p>Normal operation Full calibration time</p>
15:12	RW	0xb	<p>T_XSOFFSET (t_xsoffset):</p> <p>$t_{XS} = T_{RFC} + 10ns$. Setup of T_XSOFFSET is # of cycles for 10 ns. Range is between 3 and 11 DCLK cycles</p>
11:0	RW	0x100	<p>T_XSDLL (t_xsdll):</p> <p>Exit Self Refresh to commands requiring a locked DLL in the range of 128 to 4095 DCLK cycles</p>



2.6.17 tcmr2shadow

Timing Constraints MR2 Shadow Timing Parameter

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x21c		Function: 0,1,4,5	
Bit	Attr	Default	Description
26:24	RW_LV	0x0	<p>ADDR_BIT_SWIZZLE (addr_bit_swizzle):</p> <p>Each bit is set in case of the corresponding 2-rank UDIMM or certain LRDIMM requires address mirroring/swizzling. It indicates that some of the address bits are swizzled for rank 1 (or rank 3), and this has to be considered in MRS command. The address swizzling bits:</p> <ul style="list-style-type: none"> A3 and A4 A5 and A6 A7 and A8 BA0 and BA1 <p>Bit 24 refers to DIMM 0 Bit 25 refers to DIMM 1 Bit 26 refers to DIMM 2</p>
23:16	RW	0x2	<p>MR2_SHDW_A15TO8 (mr2_shdw_a15to8):</p> <p>Copy of MR2 A[15:8] shadow.</p> <p>Bit 23-19: zero, copy of MR2 A[15:11], reserved for future JEDEC use Bit 18-17: Rtt_WR, i.e. copy of MR2 A[10:9] Bit 16: zero, copy of MR2 A[8], reserved for future JEDEC use</p>
14:12	RW	0x0	<p>MR2_SHDW_A7_SRT (mr2_shdw_a7_srt):</p> <p>Copy of MR2 A[7] shadow which defines per DIMM availability of SRT mode - set if extended temperature range and ASR is not supported, otherwise cleared</p> <p>Bit 14: Dimm 2 Bit 13: Dimm 1 Bit 12: Dimm 0</p>
10:8	RW	0x0	<p>MR2_SHDW_A6_ASR (mr2_shdw_a6_asr):</p> <p>Copy of MR2 A[6] shadow which defines per DIMM availability of ASR mode - set if Auto Self-Refresh (ASR) is supported, otherwise cleared</p> <p>Bit 10: Dimm 2 Bit 9: Dimm 1 Bit 8: Dimm 0</p>
5:0	RW	0x18	<p>MR2_SHDW_A5TO0 (mr2_shdw_a5to0):</p> <p>Copy of MR2 A[5:0] shadow</p>

2.6.18 tczqcal

Timing Constraints ZQ Calibration Timing Parameter



Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x220		Function: 0,1,4,5	
Bit	Attr	Default	Description
15:8	RW	0x40	T_ZQCS (t_zqcs): tZQCS in DCLK cycles (32 to 255, default is 64)
7:0	RW	0x80	ZQCSPERIOD (zqcsperiod): Time between ZQ-FSM initiated ZQCS operations in tREFI * 128 (2 to 255, default is 128). Note: ZQCx is issued at SRX.

2.6.19 tcstagger_ref

tRFC like timing constraint parameter except it is a timing constraint applicable to REF-REF separation between different ranks on a channel.

Note: this register value only become effective after MCMNT_UCR_CHK_N_BIT.STAGGER_REF_EN is set.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x224		Function: 0,1,4,5	
Bit	Attr	Default	Description
9:0	RW	0x80	T_STAGGER_REF (t_stagger_ref): tRFC like timing constraint parameter except it is a timing constraint applicable to REF-REF separation between different ranks on a channel. It is recommended to set T_STAGGER_REF equal or less than the T_RFC parameter which is defined as: 0800MT/s : 040h 1067MT/s : 056h 1333MT/s : 06Bh 1600MT/s : 080h 1867MT/s : 096h

2.6.20 tcmr0shadow

MRO Shadow Register

Type: CFG		PortID: N/A	
Bus: 1		Device: 30	
Offset: 0x22c		Function: 0,1,4,5	
Bit	Attr	Default	Description
11:0	RW	0x0	MRO_SHADOW (mr0_shadow): BIOS program this field for MRO register A11:A0 for all DIMMs in this channel. iMC hardware is dynamically issuing MRS to MRO to control the fast and slow exit PPD (MRS MRO A12). Other address bits (A[11:0]) is defined by this register field. A15:A13 are always zero.



2.6.21 rpqage

Read Pending Queue Age Counters.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x234		Function: 0,1,4,5	
Bit	Attr	Default	Description
25:16	RW	0x0	IOCount (iocount): This is the RPQ Age Counter for the Medium and Low priority (VCO) non-isoch transactions issued from HA. The counter is increased by one every time there's a CAS command sent. When the RPQ Age Counter is equal to this configured field value, the non-isoch transaction is aged to the next priority level. BIOS must set this field to non-zero value before setting the MCMTR.NORMAL = 1.
9:0	RW	0x0	Reserved

2.6.22 idletime

At a high level, the goal of any page closing policy is to trade off some Premature Page Closes (PPCs) in order to avoid more Overdue Page Closes (OPCs). In other words, we want to avoid costly Page Misses and turn them into Page Empties at the expense of occasionally missing a Page Hit and instead getting a Page Empty. The scheme achieves this by tracking the number of PPCs and OPCs over a certain configurable window (of requests). It then compares the two values to configurable thresholds, and adjusts the amount of time before closing pages accordingly.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x238		Function: 0,1,4,5	
Bit	Attr	Default	Description
28:28	RW	0x1	ADAPT_PG_CLSE (adapt_pg_clse): This register is programmed in conjunction with MCMTR.CLOSEPG to enable three different modes: 1 Closed Page Mode Mode -- MCMTR.CLOSE_PG = 1 and ADAPT_PG_CLSE = 0 2 Open Page Mode Mode -- MCMTR.CLOSE_PG = 0 and ADAPT_PG_CLSE = 0 3 Adaptive Open Open -- MCMTR.CLOSE_PG = 0 and ADAPT_PG_CLSE = 1 MCMTR.CLOSE_PG = 1 and ADAPT_PG_CLSE = 1 is illegal. When ADAPT_PG_CLSE = 0, the page close idle timer gets set with IDLE_PAGE_RST_VAL times 4.
27:21	RW	0x6	OPC_TH (opc_th): Overdue Page Close (OPC) Threshold If the number of OPCs in a given window is larger than this threshold, we decrease the RV.
20:14	RW	0x6	PPC_TH (ppc_th): Premature Page Close (PPC) Threshold If the number of PPCs in a given window is larger than this threshold, we increase the RV



Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x238		Function: 0,1,4,5	
Bit	Attr	Default	Description
13:6	RW	0x40	WIN_SIZE (win_size): Window Size (WS): The number of requests that we track before making a decision to adapt the RV.
5:0	RW	0x8	IDLE_PAGE_RST_VAL (idle_page_rst_val): Idle Counter Reset Value (RV): This is the value that effectively adapts. It determines what value the various ICs are set to whenever they are reset. It therefore controls the number of cycles before an automatic page close is triggered for an entire channel.

2.6.23 rdimmtimingcntl

RDIMM Timing Control.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x23c		Function: 0,1,4,5	
Bit	Attr	Default	Description
28:16	RW	0x12c0	T_STAB (t_stab): Stabilizing time in number of DCLK, i.e. the DCLK must be stable for T_STAB before any access to the device take place. We have included tCKSRX in the T_STAB programming since processor does not have separate tCKSRX parameter control to delay self-refresh exit latency from clock stopped conditions. Note #1: zero value in T_STAB is reserved and it is important to AVOID programming a zero value in the T_STAB. Recommended settings Note: contains stretch goal and/or over-clock frequency examples: FREQ TSTAB for RDIMM (including tCKSRX value) 0800 0960h + 5h = 0965h 1067 0C80h + 5h = 0c85h 1333 0FA0h + 7h = 0FA7h 1600 12C0h + 8h = 12C8h 1867 15E0h + Ah = 15EAh 2133 1900h + Bh = 190Bh FREQ TSTAB for UDIMM (that is, tCKSRX value) 0800 7h 1067 7h 1333 9h 1600 Ah 1867 Ch 2133 Dh
3:0	RW	0x8	T_MRD (t_mrd): Command word to command word programming delay in DCLK



2.6.24 rdimmtimingcntl2

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x240		Function: 0,1,4,5	
Bit	Attr	Default	Description
7:4	RW	0x2	T_CKEV (t_cke): Input buffers DCKE0 and DCKE1 disable time float after CK/CK# LOW not needed since DDRIO cannot program the CKE to be tristated.
3:0	RW	0x5	T_CKOFF (t_ckoff): tCKOFF timing parameter: Number of tCK required for both DCKE0 and DCKE1 to remain LOW before both CK/CK# are driven Low Minimum setting is 2.

2.6.25 tcmrs

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x244		Function: 0,1,4,5	
Bit	Attr	Default	Description
3:0	RW	0x8	TMRD_DDR3 (tmdr_ddr3): DDR3 tMRD timing parameter. MRS to MRS minimum delay in number of DCLK.

2.6.26 mc_init_stat_c

State register per channel. Sets control signals static values. Power-up default is state 0x0 set by global reset.

BIOS should leave this register default to zero since PCODE has ReadWrite ODT table logic to control ODT dynamically during IOSAV or NORMAL modes.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x280		Function: 0,1,4,5	
Bit	Attr	Default	Description
13:8	RW_L	0x0	ODT override (odt_override): When set, the bit overrides and asserts the corresponding ODT[5:0] output signal during IOSAV mode. When cleared, the ODT pin is controlled by the IMC IOSAV logic.
5:0	RW_L	0x0	CKE ON OVERRIDE (cke_on): When set, the bit overrides and asserts the corresponding CKE[5:0] output signal during IOSAV mode. When cleared, the CKE pin is controlled by the IMC IOSAV logic.



2.7 Device 16, Functions 2, 3, 6, 7

DID		VID		0h		80h	
PCISTS		PCICMD		4h		84h	
CCR			RID	8h		88h	
BIST	HDR	PLAT	CLSR	Ch		8Ch	
				10h		90h	
				14h		94h	
				18h		98h	
				1Ch		9Ch	
				20h		A0h	
				24h		A4h	
				28h		A8h	
SDID		SVID		2Ch		ACh	
				30h		B0h	
				CAPPTR		34h	B4h
				38h		B8h	
MAXLAT	MINGNT	INTPIN	INTL	3Ch		BCh	
PXPCAP				40h		C0h	
				44h		C4h	
				48h		C8h	
				4Ch		CCh	
				50h		D0h	
				54h		D4h	
				58h		D8h	
				5Ch		DCh	
				60h		E0h	
				64h		E4h	
				68h		E8h	
				6Ch		ECh	
				70h	F0h		
74h	F4h						
78h	F8h						
7Ch	FCh						

		100h		180h
CORRERRCNT_0		104h		184h
CORRERRCNT_1		108h		188h
CORRERRCNT_2		10Ch		18Ch
CORRERRCNT_3		110h		190h
		114h		194h
		118h		198h
CORRERRTHRSHLD_0		11Ch		19Ch



Integrated Memory Controller (iMC) Configuration Registers

CORRERRTHRSHLD_1				120h		1A0h
CORRERRTHRSHLD_2				124h		1A4h
CORRERRTHRSHLD_3				128h		1A8h
				12Ch		1ACh
				130h		1B0h
CORRERRORSTATUS				134h		1B4h
LEAKY_BKT_2ND_CNTR_REG				138h		1B8h
				13Ch		1BCh
DEVTAG_C NTL_3	DEVTAG_C NTL_2	DEVTAG_C NTL_1	DEVTAG_C NTL_0	140h		1C0h
DEVTAG_C NTL_7	DEVTAG_C NTL_6	DEVTAG_C NTL_5	DEVTAG_C NTL_4	144h		1C4h
				148h		1C8h
				14Ch		1CCh
				150h		1D0h
				154h		1D4h
				158h		1D8h
				15Ch		1DCh
				160h		1E0h
				164h		1E4h
				168h		1E8h
				16Ch		1ECh
				170h	1F0h	
				174h	1F4h	
178h	1F8h					
				17Ch	1FCh	

				200h	280h
				204h	284h
				208h	288h
				20Ch	28Ch
				210h	290h
				214h	294h
				218h	298h
				21Ch	29Ch
				220h	2A0h
				224h	2A4h
				228h	2A8h
				22Ch	2ACh
				230h	2B0h
				234h	2B4h
				238h	2B8h
				23Ch	2BCh



	244h		2C4h
	248h		2C8h
	24Ch		2CCh
	250h		2D0h
	254h		2D4h
	258h		2D8h
	25Ch		2DCh
	260h		2E0h
	264h		2E4h
	268h		2E8h
	26Ch		2ECh
	270h		2F0h
	274h		2F4h
	278h		2F8h
	27Ch		2FCh

2.7.1 correrrcnt_0

Per Rank corrected error counters.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x104		Function: 2,3,6,7	
Bit	Attr	Default	Description
31:31	RW1CS	0x0	RANK 1 OVERFLOW (overflow_1): The corrected error count for this rank has been overflowed. Once set it can only be cleared via a write from BIOS.
30:16	RWS_V	0x0	RANK 1 CORRECTABLE ERROR COUNT (cor_err_cnt_1): The corrected error count for this rank. Hardware automatically clears this field when the corresponding OVERFLOW_x bit is changing from 0 to 1.
15:15	RW1CS	0x0	RANK 0 OVERFLOW (overflow_0): The corrected error count for this rank has been overflowed. Once set it can only be cleared via a write from BIOS.
14:0	RWS_V	0x0	RANK 0 CORRECTABLE ERROR COUNT (cor_err_cnt_0): The corrected error count for this rank. Hardware automatically clear this field when the corresponding OVERFLOW_x bit is changing from 0 to 1.



2.7.2 correrrcnt_1

Per Rank corrected error counters.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x108		Function: 2,3,6,7	
Bit	Attr	Default	Description
31:31	RW1CS	0x0	RANK 3 OVERFLOW (overflow_3): The corrected error count has crested over the limit for this rank. Once set it can only be cleared via a write from BIOS.
30:16	RWS_V	0x0	RANK 3 COR_ERR_CNT (cor_err_cnt_3): The corrected error count for this rank.
15:15	RW1CS	0x0	RANK 2 OVERFLOW (overflow_2): The corrected error count has crested over the limit for this rank. Once set it can only be cleared via a write from BIOS.
14:0	RWS_V	0x0	RANK 2 COR_ERR_CNT (cor_err_cnt_2): The corrected error count for this rank.

2.7.3 correrrcnt_2

Per Rank corrected error counters.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x10c		Function: 2,3,6,7	
Bit	Attr	Default	Description
31:31	RW1CS	0x0	RANK 5 OVERFLOW (overflow_5): The corrected error count has crested over the limit for this rank. Once set it can only be cleared via a write from BIOS.
30:16	RWS_V	0x0	RANK 5 COR_ERR_CNT (cor_err_cnt_5): The corrected error count for this rank.
15:15	RW1CS	0x0	RANK 4 OVERFLOW (overflow_4): The corrected error count has crested over the limit for this rank. Once set it can only be cleared via a write from BIOS.
14:0	RWS_V	0x0	RANK 4 COR_ERR_CNT (cor_err_cnt_4): The corrected error count for this rank.



2.7.4 correrrcnt_3

Per Rank corrected error counters.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x110		Function: 2,3,6,7	
Bit	Attr	Default	Description
31:31	RW1CS	0x0	RANK 7 OVERFLOW (overflow_7): The corrected error count for this rank.
30:16	RWS_V	0x0	RANK 7 COR_ERR_CNT_7 (cor_err_cnt_7): The corrected error count for this rank.
15:15	RW1CS	0x0	RANK 6 OVERFLOW (overflow_6): The corrected error count has crested over the limit for this rank. Once set it can only be cleared via a write from BIOS.
14:0	RWS_V	0x0	RANK 6 COR_ERR_CNT (cor_err_cnt_6): The corrected error count for this rank.

2.7.5 correrrthshld_0

This register holds the per rank corrected error thresholding value.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x11c		Function: 2,3,6,7	
Bit	Attr	Default	Description
30:16	RW	0x7fff	RANK 1 COR_ERR_TH (cor_err_th_1): The corrected error threshold for this rank that will be compared to the per rank corrected error counter.
14:0	RW	0x7fff	RANK 0 COR_ERR_TH (cor_err_th_0): The corrected error threshold for this rank that will be compared to the per rank corrected error counter.



2.7.6 corrrerrthrsld_1

This register holds the per rank corrected error thresholding value.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x120		Function: 2,3,6,7	
Bit	Attr	Default	Description
30:16	RW	0x7fff	RANK 3 COR_ERR_TH (cor_err_th_3): The corrected error threshold for this rank that will be compared to the per rank corrected error counter.
14:0	RW	0x7fff	RANK 2 COR_ERR_TH (cor_err_th_2): The corrected error threshold for this rank that will be compared to the per rank corrected error counter.

2.7.7 corrrerrthrsld_2

This register holds the per rank corrected error thresholding value.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x124		Function: 2,3,6,7	
Bit	Attr	Default	Description
30:16	RW	0x7fff	RANK 5 COR_ERR_TH (cor_err_th_5): The corrected error threshold for this rank that will be compared to the per rank corrected error counter.
14:0	RW	0x7fff	RANK 4 COR_ERR_TH (cor_err_th_4): The corrected error threshold for this rank that will be compared to the per rank corrected error counter.

2.7.8 corrrerrthrsld_3

This register holds the per rank corrected error thresholding value.

Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x128		Function: 2,3,6,7	
Bit	Attr	Default	Description
30:16	RW	0x7fff	RANK 7 COR_ERR_TH (cor_err_th_7): The corrected error threshold for this rank that will be compared to the per rank corrected error counter.
14:0	RW	0x7fff	RANK 6 COR_ERR_TH (cor_err_th_6): The corrected error threshold for this rank that will be compared to the per rank corrected error counter.



2.7.9 corerrorstatus

Per rank corrected error status. These bits are reset by bios.

Type: CFG Bus: 1 Offset: 0x134		PortID: N/A Device: 16 Function: 2,3,6,7	
Bit	Attr	Default	Description
7:0	RW1C	0x0	ERR_OVERFLOW_STAT (err_overflow_stat): This 8 bit field is the per rank error over-threshold status bits. The organization is as follows: Bit 0 : Rank 0 Bit 1 : Rank 1 Bit 2 : Rank 2 Bit 3 : Rank 3 Bit 4 : Rank 4 Bit 5 : Rank 5 Bit 6 : Rank 6 Bit 7 : Rank 7 Note: The register tracks which rank has reached or exceeded the corresponding CORRERRTHRSHLD threshold settings.

2.7.10 leaky_bkt_2nd_cntr_reg

Type: CFG Bus: 1 Offset: 0x138		PortID: N/A Device: 16 Function: 2,3,6,7	
Bit	Attr	Default	Description
31:16	RW	0x0	LEAKY_BKT_2ND_CNTR_LIMIT(leaky_bkt_2nd_cntr_limit): Secondary Leaky Bucket Counter Limit (2b per DIMM). This register defines secondary leaky bucket counter limit for all 8 logical ranks within channel. The counter logic will generate the secondary LEAK pulse to decrement the rank's correctable error counter by 1 when the corresponding rank leaky bucket rank counter roll over at the predefined counter limit. The counter increment at the primary leak pulse from the LEAKY_BUCKET_CNTR_LO and LEAKY_BUCKET_CNTR_HI logic. Bit[31:30]: Rank 7 Secondary Leaky Bucket Counter Limit Bit[29:28]: Rank 6 Secondary Leaky Bucket Counter Limit Bit[27:26]: Rank 5 Secondary Leaky Bucket Counter Limit Bit[25:24]: Rank 4 Secondary Leaky Bucket Counter Limit Bit[23:22]: Rank 3 Secondary Leaky Bucket Counter Limit Bit[21:20]: Rank 2 Secondary Leaky Bucket Counter Limit Bit[19:18]: Rank 1 Secondary Leaky Bucket Counter Limit Bit[17:16]: Rank 0 Secondary Leaky Bucket Counter Limit The value of the limit is defined as the following: 0: the LEAK pulse is generated one DCLK after the counter roll over at 3. 1: the LEAK pulse is generated one DCLK after the primary LEAK pulse is asserted. 2: the LEAK pulse is generated one DCLK after the counter roll over at 1. 3: the LEAK pulse is generated one DCLK after the counter roll over at 2.



Type: CFG		PortID: N/A	
Bus: 1		Device: 16	
Offset: 0x138		Function: 2,3,6,7	
Bit	Attr	Default	Description
15:0	RW_V	0x0	LEAKY_BKT_2ND_CNTR (leaky_bkt_2nd_cntr): Per rank secondary leaky bucket counter (2b per rank) bit [15:14]: rank 7 secondary leaky bucket counter bit [13:12]: rank 6 secondary leaky bucket counter bit [11:10]: rank 5 secondary leaky bucket counter bit [9:8]: rank 4 secondary leaky bucket counter bit [7:6]: rank 3 secondary leaky bucket counter bit [5:4]: rank 2 secondary leaky bucket counter bit [3:2]: rank 1 secondary leaky bucket counter bit [1:0]: rank 0 secondary leaky bucket counter

2.7.11 devtag_cntl_[0:7]

SDDC Usage model

When the number of correctable errors (CORRERRCNT_x) from a particular rank exceeds the corresponding threshold (CORRERRTHRSHLD_y), hardware will generate a SMI interrupt and log and preserve the failing device in the FailDevice field. SMM software will read the failing device on the particular rank. Software then set the EN bit to enable substitution of the failing device/rank with the parity from the rest of the devices in line.

For independent channel configuration, each rank can tag once. Up to 8 ranks can be tagged.

For lock-step channel configuration, only one x8 device can be tagged per rank-pair. SMM software must identify which channel should be tagged for this rank and only set the valid bit for the channel from the channel-pair.

There is no hardware logic to report incorrect programming error. Unpredictable error and or silent data corruption will be the consequence of such programming error.

If the rank-sparing is enabled, it is recommended to prioritize the rank-sparing before triggering the device tagging due to the nature of the device tagging would drop the correction capability and any subsequent ECC error from this rank would cause uncorrectable error.



Type: CFG PortID: N/A Bus: 1 Device: 16 Function: 2,3,6,7 Offset: 0x140, 0x141, 0x142, 0x143, 0x144, 0x145, 0x146, 0x147			
Bit	Attr	Default	Description
7:7	RWS_L	0x0	<p>Device tagging enable for this rank (en):</p> <p>Device tagging SDDC enable for this rank. Once set, the parity device of the rank is used for the replacement device content. After tagging, the rank will no longer have the "correction" capability. ECC error "detection" capability will not degrade after setting this bit.</p> <p>Warning: For lock-step channel configuration, only one x8 device can be tagged per rank-pair. SMM software must identify which channel should be tagged for this rank and only set the corresponding DEVTAG_CNTL_x.EN bit for the channel contains the fail device. The DEVTAG_CNTL_x.EN on the other channel of the corresponding rank must not be set.</p> <p>Must never be enable prior using IOSAV</p> <p>DDDC:</p> <p>On DDDC supported systems, BIOS has the option to enable SDDC in conjunction with DDDC_CNTL:SPARING to enable faster sparing with SDDC substitution. This field is cleared by HW on completion of DDDC sparing.</p>
5:0	RWS_V	0x3f	<p>Fail Device ID for this rank (faildevice):</p> <p>Hardware will capture the fail device ID of the rank in the FailDevice field upon successful correction from the device correction engine. After SDDC is enabled HW may not update this field. Valid Range is decimal 0-17 to indicate which x4 device (independent channel) or x8 device (lock-step mode) has failed.</p>

§



Integrated Memory Controller (iMC) Configuration Registers



3 R2PCIe

3.1 Device 19 Function 0

DID		VID		0h		80h	
PCISTS		PCICMD		4h		84h	
CCR			RID	8h		88h	
BIST	HDR	PLAT	CLSR	Ch		8Ch	
				10h		90h	
				14h		94h	
				18h		98h	
				1Ch		9Ch	
				20h		A0h	
				24h		A4h	
				28h		A8h	
SDID		SVID		2Ch		ACh	
				30h		B0h	
				CAPPTR		34h	B4h
				38h		B8h	
MAXLAT	MINGNT	INTPIN	INTL	3Ch		BCh	
				40h		C0h	
				44h		C4h	
				48h		C8h	
				4Ch		CCh	
				50h		D0h	
				54h		D4h	
				58h		D8h	
				5Ch		DCh	
				60h		E0h	
				64h		E4h	
				68h		E8h	
				6Ch		ECh	
				70h		F0h	
				74h		F4h	
				78h	F8h		
7Ch	FCh						

§





4 Intel® QuickPath Interconnect (Intel® QPI Agent) Registers

Device 8 corresponds to QPI0

4.1 Intel QuickPath Interconnect Link Layers Registers

DID		VID		0h		80h		
PCISTS		PCICMD		4h		84h		
CCR			RID	8h		88h		
BIST	HDR	PLAT	CLSR	Ch		8Ch		
				10h		90h		
				14h		94h		
				18h		98h		
				1Ch		9Ch		
				20h		A0h		
				24h		A4h		
				28h		A8h		
SDID		SVID		2Ch		ACh		
				30h		B0h		
				CAPPTR		34h	B4h	
						38h	B8h	
MAXLAT	MINGNT	INTPIN	INTL	3Ch		BCh		
				40h		C0h		
				44h		C4h		
				48h		C8h		
				4Ch		CCh		
				50h	D0h			
				54h	QPIMISCSTAT		D4h	
				58h			D8h	
				5Ch			DCh	
				60h			E0h	
				64h			E4h	
				68h			E8h	
				6Ch			ECh	
				70h			F0h	
74h	F4h							
78h	F8h							
7Ch	FCh							



4.1.1 QPIMISCSTAT: Intel QPI Misc Status

This is a status register for Common logic in Intel QPI.

QPIMISCSTAT Bus: 1 Device: 8Function: 0Offset: D4			
Bit	Attr	Default	Description
31:5	RV	0h	Reserved
4	RO-V	0b	Slow Mode Reflects the current slow mode status being driven to the PLL. This will be set out of reset to bring Intel QPI in slow mode. And is only expected to be set when qpi_rate is set to 6.4 GT/s.
3	RV	0h	Reserved
2:0	RO-V	011b	Intel QPI Rate This reflects the current Intel QPI rate setting into the PLL. 010 - 5.6 GT/s 011 - 6.4 GT/s 100 - 7.2 GT/s 101 - 8 GT/s other - Reserved

4.1.2 FWDC_LCPKAMP_CFG

Type: CFG		PortID: N/A	
Bus: 1		Device: 8	
Bus: 1		Device: 9	
Offset: 0x390		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
29:25	RWS_L	0xe	fwdc_lcampcapctl_8g:
24:20	RWS_L	0x1b	fwdc_lcampcapctl_6g:
16:16	RWS_L	0x0	fwdc_fca_lcamp_byp_en: Enable signal for LC peak amplifier. when this path is enabled, the other parallel forwarded clock path is disabled 0 = LC peak amplifier is enabled, normal mode 1 = LC peak amplifier bypassed affects AFE pin: csfwdc_fca_lcamp_byp_en_u<0-1>_f0csnnnh
12:8	RWS_L	0x14	fwdc_lcampcapctl:

§



5 Intel QuickPath Interconnect Ring (R3QPI) Registers

5.1 Device 19 Function 4

The Device 19 registers address R3QPI0 (Intel QPI Links 0 and 1).

Register Name	Offset	Size
VID	0x0	16
DID	0x2	16
PCICMD	0x4	16
PCISTS	0x6	16
rid	0x8	8
ccr	0x9	24
CLSR	0xc	8
PLAT	0xd	8
HDR	0xe	8
BIST	0xf	8
SVID	0x2c	16
SDID	0x2e	16
CAPPTR	0x34	8
INTL	0x3c	8
INTPIN	0x3d	8
MINGNT	0x3e	8
MAXLAT	0x3f	8
R3QORT	0x40	32
R3QRTE0CR	0x44	32
R3QRTE1CR	0x48	32
R3QCBOHACR	0x4c	32
R3QE0CR	0x50	32
R3QE1CR	0x54	32
R3QPCIR0CR	0x58	32
R3QPCIR1CR	0x5c	32
R3QCTRL	0x60	32
R3SNPFANOUT_P0	0x64	32
R3SNPFANOUT_P1	0x68	32
R3QTxTRH	0x6c	32
R3QORRC	0x70	32
R2IGRSPARECSR	0x74	32
R3QIGRVNSELO	0x78	32
R3QIGRVNSEL1	0x7c	32
R3_GL_ERR_CFG	0x80	32



Register Name	Offset	Size
R3BGFTUNE	0x84	32
R3EGRCTRL	0x88	32
R3QEGR1VNSEL	0x8c	32
R3QINGCTL	0x98	32
R3QINGADVNACTL	0xa0	32
R3INGADTXQCTL	0xa4	32
R3INGVN0SMCRDCTL	0xac	32
R3EGRERRLOG0	0xb0	32
R3EGRERRMSK0	0xb4	32
R3EGRERRLOG1	0xb8	32
R3EGRERRMSK1	0xbc	32
R3INGERRLOG0	0xc4	32
R3INGERRMASK0	0xc8	32
R3EGRERRMSK_VN1	0xcc	32
R3INGERRLOG1	0xd4	32
R3INGERRMASK1	0xd8	32
R3UTLSPARECSR	0xf4	32
R3INGERRLOG_MISC	0xf8	32
R3QDEBUG	0xfc	32

5.1.1 VID

Type: CFG	Port ID: N/A	Function: 4
Bus: 1	Device: 18	Function: 4
Bus: 1	Device: 19	Function: 4
Offset: 0x0		

Bit	Attr	Default	Description
15:0	RO	0x8086	Vendor_Identification_Number:

5.1.2 DID

Type: CFG	Port ID: N/A	Function: 4
Bus: 1	Device: 18	Function: 4
Bus: 1	Device: 19	Function: 4
Offset: 0x2		

Bit	Attr	Default	Description
15:0	RO	0xe41 (Device 18) 0xe81 (Device 19)	Device_Identification_Number:



5.1.3 PCI CMD

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0x4			
Bit	Attr	Default	Description
10:10	RO	0x0	INTx_Disable:
9:9	RO	0x0	Fast_Back_to_Back_Enable:
8:8	RO	0x0	SERR_Enable:
7:7	RO	0x0	IDSEL_Stepping_Wait_Cycle_Control:
6:6	RO	0x0	Parity_Error_Response:
5:5	RO	0x0	VGA_palette_snoop_Enable:
4:4	RO	0x0	Memory_Write_and_Invalidate_Enable:
3:3	RO	0x0	Special_Cycle_Enable:
2:2	RO	0x0	Bus_Master_Enable:
1:1	RO	0x0	Memory_Space_Enable:
0:0	RO	0x0	IO_Space_Enable:

5.1.4 PCI STS

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0x6			
Bit	Attr	Default	Description
15:15	RO	0x0	Detected_Parity_Error:
14:14	RO	0x0	Signaled_System_Error:
13:13	RO	0x0	Received_Master_Abort:
12:12	RO	0x0	Received_Target_Abort:
11:11	RO	0x0	Signaled_Target_Abort:
10:9	RO	0x0	DEVSEL_Timing:
8:8	RO	0x0	Master_Data_Parity_Error:
7:7	RO	0x0	Fast_Back_to_Back:
6:6	RO	0x0	Reserved:
5:5	RO	0x0	Sixty_Six_MHz_capable:
4:4	RO	0x0	Capabilities_List:
3:3	RO	0x0	INTx_Status:



5.1.5 rid

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0x8		MSR Addr:N/A	
		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
7:0	RO_V	0x0	<p>revision_id:</p> <p>Reflects the Uncore Revision ID after reset. Reflects the Compatibility Revision ID after BIOS writes 0x69 to any RID register in any Intel® Xeon® processor E5 v2 product family function.</p> <p>Implementation Note: Read and write requests from the host to any RID register in any Intel® Xeon® processor E5 v2 product family function are re-directed to the IIO cluster. Accesses to the CCR field are also redirected due to DWORD alignment. It is possible that JTAG accesses are direct, so will not always be redirected.</p>

5.1.6 ccr

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0x9		MSR Addr:N/A	
		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
23:16	RO_V	0x8	<p>base_class:</p> <p>Generic Device</p>
15:8	RO_V	0x80	<p>sub_class:</p> <p>Generic Device</p>
7:0	RO_V	0x0	<p>register_level_programming_interface:</p> <p>Set to 00h for all non-APIC devices.</p>

5.1.7 CLSR

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xc			
		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
7:0	RW	0x0	Cacheline_Size:

5.1.8 PLAT

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xd			
		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
7:0	RO	0x0	Primary_Latency_Timer:



5.1.9 HDR

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19	Function:	4
Offset:	0xe				
Bit	Attr	Default	Description		
7:7	RO	0x1	Multi_function_Device:		
6:0	RO	0x0	Configuration_Layout:		

5.1.10 BIST

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19	Function:	4
Offset:	0xf				
Bit	Attr	Default	Description		
7:0	RO	0x0	BIST_Tests:		

5.1.11 SVID

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19	Function:	4
Offset:	0x2c				
Bit	Attr	Default	Description		
15:0	RW_O	0x8086	Subsystem_Vendor_Identification_Number:		

5.1.12 SDID

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19	Function:	4
Offset:	0x2e				
Bit	Attr	Default	Description		
15:0	RW_O	0x0	Subsystem_Device_Identification_Number:		

5.1.13 CAPPTR

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19	Function:	4
Offset:	0x34				
Bit	Attr	Default	Description		
7:0	RO	0x0	Capability_Pointer:		



5.1.14 INTL

Type:	CFG	Port ID:	N/A
Bus:	1	Device:	18
Bus:	1	Device:	19
Offset:	0x3c	Function:	4
		Function:	4
Bit	Attr	Default	Description
7:0	RO	0x0	Interrupt_Line:

5.1.15 INTPIN

Type:	CFG	Port ID:	N/A
Bus:	1	Device:	18
Bus:	1	Device:	19
Offset:	0x3d	Function:	4
		Function:	4
Bit	Attr	Default	Description
7:0	RO	0x0	Interrupt_Pin:

5.1.16 MINGNT

Type:	CFG	Port ID:	N/A
Bus:	1	Device:	18
Bus:	1	Device:	19
Offset:	0x3e	Function:	4
		Function:	4
Bit	Attr	Default	Description
7:0	RO	0x0	Minimum_Grant_Value:

5.1.17 MAXLAT

Type:	CFG	Port ID:	N/A
Bus:	1	Device:	18
Bus:	1	Device:	19
Offset:	0x3f	Function:	4
		Function:	4
Bit	Attr	Default	Description
7:0	RO	0x0	Maximum_Latency_Value:

5.1.18 R3QQRT

R3QPI Intel QPI Routing Table

Intel QPI Routing Configuration for both Ports on this R3QPI

Bits[15:0] Correspond to Port0 and Bits[31:16] Correspond to Port1

The programming is 2 bits per SocketID up to 8

For each field, the encoding is as such:



5.1.19 R3QRTE[0:1]CR

R3QPI Route-Through Egress Credit Port X (X = 0, 1).

This register updates credits in the Egress queue directly value. These credits are allocation in receiving Ingress queue, so they need to be set to ensure Ingress queues can never overflow. Default values are set to ensure functionality for minimal RT function. RT requires Routing Table values be programmed by BIOS before it will be functional.

Credits for IIO and CBo IPQ are static initialized to one credit each. No configuration is need for those.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0x44, 0x48			
Bit	Attr	Default	Description
25:24	RWS	0x1	VNO NCB - QPI(VN0NCBQPI): Only used in systems that enable Route-Through
23:22	RWS	0x1	VNO NCS - QPI(VN0NCSQPI): Only used in systems that enable Route-Through
21:20	RWS	0x1	VNO DRS - QPI(VN0DRSQPI): Only used in systems that enable Route-Through
19:16	RWS	0x0	BL VNA - QPI(BLVNAQPI): Only used in systems that enable Route-Through The MSB (BLVNAQPI[3]) is unused by the hardware, so setting it has no effect.
9:8	RWS	0x1	VNO NDR - QPI(VN0NDRQPI): Only used in systems that enable Route-Through
7:6	RWS	0x1	VNO HOM - QPI(VN0HOMQPI): Only used in systems that enable Route-Through
5:4	RWS	0x1	VNO SNP - QPI(VN0SNPQPI): Only used in systems that enable Route-Through
3:0	RWS	0x0	AD VNA - QPI(ADVNAQPI): Only used in systems that enable Route-Through

5.1.20 R3QCBOHACR

Credit configuration between the R3QPI and the CBo's HA

For CBo, each CBo should have 8 SNP entries per link. For HA, each HA has 12 entries for DRS which are shared across all links.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0x4c			
Bit	Attr	Default	Description
22:20	RWS	0x1	NumSnxCredits Link1(NumSnxCreditsL1): SNP Credits from Link1 on this R3QPI to each CBo
19:17	RWS	0x1	NumSnxCredits Link0(NumSnxCreditsL0): SNP Credits from Link0 on this R3QPI to each CBo



Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0x4c		Function: 4	
Function: 4			
Bit	Attr	Default	Description
16:16	RWS	0x0	HACreditEn: Enables crediting between the R3 and HA Crediting onoff is all or nothing and must be consistent across all R3's and HA's
15:12	RWS	0x4	HA1CreditR1: Credits from Link1 on this R3QPI to HA1
11:8	RWS	0x4	HA0CreditR1: Credits from Link1 on this R3QPI to HA0
7:4	RWS	0x4	HA1CreditR0: Credits from Link0 on this R3QPI to HA1
3:0	RWS	0x4	HA0CreditR0: Credits from Link0 on this R3QPI to HA0

5.1.21 R3QE[0:1]CR

R3QPI Egress Control Port X (X = 0, 1).

This register controls internal allocation of AK resources for credit return.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0x50, 0x54		Function: 4	
Function: 4			
Bit	Attr	Default	Description
2:0	RWS	0x2	AKEgressCreditReturn:

5.1.22 R3QPCIR[0:1]CR

R3QPI PCI Ring Credit Port X (X = 0, 1).

Register defines credits allocated on the ring for R3QPI to send messages to R2PCI ring stop.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0x58, 0x5c		Function: 4	
Function: 4			
Bit	Attr	Default	Description
10:8	RWS	0x1	PCINCBCredit:
6:4	RWS	0x1	PCINCSCredit:



5.1.23 R3QCTRL

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0x60		Function: 4	
Function: 4			
Bit	Attr	Default	Description
25:25	RWS	0x0	Port 1 Clock Disable(Port1ClkDisable): Disables clocking of Port 1 TX on this R3QPI instance Used for power savings when Intel QPI links are disabled.
24:24	RWS	0x0	Port 0Clock Disable(Port0ClkDisable): Disables clocking of Port 1 TX on this R3QPI instance Used for power savings when Intel QPI links are disabled.
17:17	RWS	0x0	Port 1 Egress Clk Disable(EgrPort1ClkDisable): Disables clocking of Port 1 RX on this R3QPI instance Used for power savings when Intel Intel QPI links are disabled.
16:16	RWS	0x0	Port 0Egress Clk Disable(EgrPort0ClkDisable): Disables clocking of Port 1 RX on this R3QPI instance Used for power savings when Intel QPI links are disabled.
5:5	RWS	0x0	reserved
4:2	RWS	0x0	Socket ID(SocketID): The Socket ID for this local socket. Used for Snoop Fanout only.
1:1	RWS	0x0	Snoop Fanout enable(SnoopFanoutEnable): Turns on Snoop Fanout Mode The value of this needs to match between all R3's as well as HA's The R3SNPFANOUT tables need to be programmed as well in this mode
0:0	RWS	0x0	Extended RTID Mode(ExtendedRTIDMode):

5.1.24 R3SNPFANOUT_P[0:1]

Snoop Fanout Table for Port X (X = 0, 1) on this R3QPI.

There are 8 4-bit entries 4 bits per Socket, indexed by the SocketID DNID[3,1:0] of Snoops.

The contents of this register are only used if Snoop Fanout is enabled via R3QCTRL1.

Each bit in the 3-bit entry represent a link onto which to fanout a Snoop.

Set bits to 1 to enable fanout to that link for a given Socket ID.

A local CBo will be snooped if the encoding of each set of 4-bits is as such:

- 0 - Co-Located Port
- 1 - Cross-Ring Port 0
- 2 - Cross-Ring Port 1



Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0x64, 0x68		Function: 4	
Function: 4			
Bit	Attr	Default	Description
23:21	RWS	0x0	FanoutTableSkt7: Snoop Fanout Table for Socket ID 7
20:18	RWS	0x0	FanoutTableSkt6: Snoop Fanout Table for Socket ID 6
17:15	RWS	0x0	FanoutTableSkt5: Snoop Fanout Table for Socket ID 5
14:12	RWS	0x0	FanoutTableSkt4: Snoop Fanout Table for Socket ID 4
11:9	RWS	0x0	FanoutTableSkt3: Snoop Fanout Table for Socket ID 3
8:6	RWS	0x0	FanoutTableSkt2: Snoop Fanout Table for Socket ID 2
5:3	RWS	0x0	FanoutTableSkt1: Snoop Fanout Table for Socket ID 1
2:0	RWS	0x0	FanoutTableSkt0: Snoop Fanout Table for Socket ID 0

5.1.25 R3QTxTRH

R3QPI TX Threshold.

The TX path has credits in the TXQ which are tracked in R3QPI for flow control. Tuning is provided to credit threshold when in L0p and L0 state to prevent over use of this queue. The queue also holds NULL flits, so too many credits allocated here will actually reduce performance.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0x6c		Function: 4	
Function: 4			
Bit	Attr	Default	Description
13:8	RWS	0x6	L0pThreshold: Threshold value used when in L0p state
5:0	RWS	0x30	L0Threshold: Threshold value used when in L0 state



5.1.26 R3QRRC

This is transmit round-robin arbitration control

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19	Function:	4
Offset:	0x70				
Bit	Attr	Default	Description		
11:6	RW	0x0	Tx BL Weight(TxBLWeight): Weight given in RR arb to the BL ring		
5:0	RW	0x0	Tx AD Weight(TxADWeight): Weight given in RR arb to the AD ring		

5.1.27 R2IGRSPARECSR

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19	Function:	4
Offset:	0x74				
Bit	Attr	Default	Description		
31:0	RW_L	0x0	spare_defeature_bit_csr:		

5.1.28 R3QIGRVNSELO

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19	Function:	4
Offset:	0x78				
Bit	Attr	Default	Description		
31:0	RWS	0x0	IgrVnSwchTable0:		

5.1.29 R3QIGRVNSEL1

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19	Function:	4
Offset:	0x7c				
Bit	Attr	Default	Description		
31:0	RWS	0x0	IgrVnSwchTable1:		



5.1.30 R3_GL_ERR_CFG

R3QPI global viral fatal error configuration.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0x80			
Bit	Attr	Default	Description
17:0	RW	0x3fe60	Reserved (Rsvd): Reserved.

5.1.31 R3BGFTUNE

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0x84			
Bit	Attr	Default	Description
30:30	RW_LV	0x0	UratioMatchSts:
29:21	RW_L	0x0	TxBubbleInit:
20:12	RW_L	0x0	RxBubbleInit:
11:9	RW_L	0x0	RxPtrDist:
8:1	RW_L	0x0	URatio:
0:0	RW_L	0x0	BgfOverride:

5.1.32 R3EGRCTRL

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0x88			
Bit	Attr	Default	Description
18:17	RW	0x0	pe_mode: This modifies PE1:0 and DNID3 from inbound Intel QPI packet to the ring. If pemode0 0 DNID3 passed through, PE0 forced to '0' If pemode0 1 DNID3 forced to '0', PE0 pass through If pemode1 0 PE1 forced to '0' If pemode1 1 PE1 pass through
16:16	RW	0x0	SwapHomeAgentPolarityDir:
15:12	RW	0x8	NumADEgressEntries:
11:8	RW	0x6	HomSnpSpawnThreshold:
7:7	RW	0x1	HomSnpSpawnEnable:
6:1	RW	0x1e	NdrBackPressThreshold:
0:0	RW	0x1	NdrBackPressEnable:



5.1.33 R3QEGR1VNSEL

VN Selection table for switching between VNs in Egress port 01.

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19		
Offset:	0x8c				
Bit	Attr	Default	Description		
31:16	RW	0x0	EgrVnSwrchTable1:		
15:0	RW	0x0	EgrVnSwrchTable0:		

5.1.34 R3QINGCTL

R3QPI Ingress Control.

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19		
Offset:	0x98				
Bit	Attr	Default	Description		
31:31	RWS	0x0	PsmiWipePwrDnOvr1:		
30:30	RWS	0x0	PsmiWipePwrDnOvr0:		
8:8	RWS	0x0	UseA0AccModeTsv:		
7:7	RWS	0x0	EnSMCreditChkUnnnH:		
6:4	RWS	0x1	NcycB4MinPktSizeCsi1:		
3:1	RWS	0x1	NcycB4MinPktSizeCsi0:		
0:0	RWS	0x0	MaxPktSizeChkDis:		

5.1.35 R3QINGADVNACTL

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19		
Offset:	0xa0				
Bit	Attr	Default	Description		
31:24	RW	0x10	ADBP1VnaCrdThr: Threshold for available TX Intel QPI VNA credits to allow Bypass of HOM/SNP/NDR packets.		
23:16	RW	0xe	BLVnaCrdThr: Threshold for available TX Intel QPI VNA credits to allow sending of NCB/NCS/DRS packets.		
15:8	RW	0x8	MinADVnaCrdThr: Minimum threshold for available TX Intel QPI VNA credits to allow sending of HOM/SNP/NDR packets used when such messages have been starved for some time.		



Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0xa0			
Bit	Attr	Default	Description
7:0	RW	0xe	MaxADVnaCrdThr: Threshold for available TX Intel QPI VNA credits to allow sending of HOM/SNP/ NDR packets used in normal operation.

5.1.36 R3INGADTXQCTL

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0xa4			
Bit	Attr	Default	Description
31:24	RW	0x10	ADBP1TxqCrdThr:
23:16	RW	0x10	BLTxqCrdThr:
15:8	RW	0x8	MinADTxqCrdThr:
7:0	RW	0x10	MaxADTxqCrdThr:

5.1.37 R3INGVNOSMCRDCTL

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0xac			
Bit	Attr	Default	Description
19:16	RW	0x1	ADVn0CrdThr:
15:8	RW	0x6	BLSMTxqCrdThr:
7:0	RW	0x6	BLSMVnaCrdThr:

5.1.38 R3EGRERRLOG[0:1]

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0xb0, 0xb8			
Bit	Attr	Default	Description
31:31	RW1CS	0x0	BLVNACrdOverflow:
30:30	RW1CS	0x0	BLVNODrsCrdOverflow:
29:29	RW1CS	0x0	BLVNONcbCrdOverflow:
28:28	RW1CS	0x0	BLVNONcsCrdOverflow:
27:27	RW1CS	0x0	BLVNACrdUnderflow:
26:26	RW1CS	0x0	BLVNODrsCrdUnderflow:
25:25	RW1CS	0x0	BLVNONcbCrdUnderflow:



Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xb0, 0xb8		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
24:24	RW1CS	0x0	BLVNOncsCrdUnderflow:
22:22	RW1CS	0x0	BLPciVNOncbCrdUnderflow:
21:21	RW1CS	0x0	BLPciVNOncsCrdUnderflow:
19:19	RW1CS	0x0	BLPciVNOncbCrdOverflow:
18:18	RW1CS	0x0	BLPciVNOncsCrdOverflow:
17:17	RW1CS	0x0	ADCboCrdUnderflow:
16:16	RW1CS	0x0	ADVNAcCrdOverflow:
15:15	RW1CS	0x0	ADVNOHomCrdOverflow:
14:14	RW1CS	0x0	ADVNOsnpCrdOverflow:
13:13	RW1CS	0x0	ADVNONdrCrdOverflow:
12:12	RW1CS	0x0	ADVNAcCrdUnderflow:
11:11	RW1CS	0x0	ADVNOHomCrdUnderflow:
10:10	RW1CS	0x0	ADVNOsnpCrdUnderflow:
9:9	RW1CS	0x0	ADVNONdrCrdUnderflow:
8:8	RW1CS	0x0	AKEgressQ_RdWrSameLocation:
7:7	RW1CS	0x0	BLEgress_Overflow:
6:6	RW1CS	0x0	ADEgress_Overflow:
5:5	RW1CS	0x0	AKEgress_Overflow:
4:4	RW1CS	0x0	BLEgress_Write_to_Valid_Entry:
3:3	RW1CS	0x0	ADEgress_Write_to_Valid_Entry:
2:2	RW1CS	0x0	AKEgress_Write_to_Valid_Entry:
1:1	RW1CS	0x0	ADEgress_BP_Qualify:

5.1.39 R3EGRERRMSK[0:1]

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xb4, 0xbc		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
31:31	RWS	0x0	BLVNAcCrdOverflowMask:
30:30	RWS	0x0	BLVNO DrsCrdOverflowMask:
29:29	RWS	0x0	BLVNOncbCrdOverflowMask:
28:28	RWS	0x0	BLVNOncsCrdOverflowMask:
27:27	RWS	0x0	BLVNAcCrdUnderflowMask:
26:26	RWS	0x0	BLVNO DrsCrdUnderflowMask:
25:25	RWS	0x0	BLVNOncbCrdUnderflowMask:
24:24	RWS	0x0	BLVNOncsCrdUnderflowMask:
22:22	RWS	0x0	BLPciVNOncbCrdUnderflowMask:
21:21	RWS	0x0	BLPciVNOncsCrdUnderflowMask:



Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xb4, 0xbc		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
19:19	RWS	0x0	BLPciVN0NcbCrdOverflowMask:
18:18	RWS	0x0	BLPciVN0NcsCrdOverflowMask:
17:17	RWS	0x0	ADCboCrdUnderflowMask:
16:16	RWS	0x0	ADVNAcCrdOverflowMask:
15:15	RWS	0x0	ADVNOHomCrdOverflowMask:
14:14	RWS	0x0	ADVNOsnpCrdOverflowMask:
13:13	RWS	0x0	ADVNONdrCrdOverflowMask:
12:12	RWS	0x0	ADVNAcCrdUnderflowMask:
11:11	RWS	0x0	ADVNOHomCrdUnderflowMask:
10:10	RWS	0x0	ADVNOsnpCrdUnderflowMask:
9:9	RWS	0x0	ADVNONdrCrdUnderflowMask:
8:8	RWS	0x0	AKEgressQ_RdWrSameLocationMask:
7:7	RWS	0x0	BLEgress_OverflowMask:
6:6	RWS	0x0	ADEgress_OverflowMask:
5:5	RWS	0x0	AKEgress_OverflowMask:
4:4	RWS	0x0	BLEgress_Write_to_Valid_EntryMask:
3:3	RWS	0x0	ADEgress_Write_to_Valid_EntryMask:
2:2	RWS	0x0	AKEgress_Write_to_Valid_EntryMask:
1:1	RWS	0x0	ADEgress_BP_QualifyMask:

5.1.40 R3INGERRLOGO

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xc4		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
31:31	RW1CS	0x0	Csi0IInvalidADArb:
30:30	RW1CS	0x0	Csi0Slot0NdrIngrNotValid:
29:29	RW1CS	0x0	Csi0Slot0snpIngrNotValid:
28:28	RW1CS	0x0	Csi0Slot0HomIngrNotValid:
27:27	RW1CS	0x0	Csi0NcbIngrNotValid:
26:26	RW1CS	0x0	Csi0NcsIngrNotValid:
25:25	RW1CS	0x0	Csi0DrsIngrNotValid:
24:24	RW1CS	0x0	Csi0Slot1NdrIngrNotValid:
23:23	RW1CS	0x0	Csi0Slot1snpIngrNotValid:
22:22	RW1CS	0x0	Csi0Slot1HomIngrNotValid:
21:21	RW1CS	0x0	Csi0LLResetTxNotIdle:
20:20	RW1CS	0x0	Csi0LLResetRxNotIdle:
19:19	RW1CS	0x0	Csi0TxQCrdUnderflow:



Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xc4		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
18:18	RW1CS	0x0	Csi0TxQCrdOverflow:
17:17	RW1CS	0x0	Csi0RemVnaCrdUnderflow:
16:16	RW1CS	0x0	Csi0RemHomCrdUnderflow:
15:15	RW1CS	0x0	Csi0RemSnpCrdUnderflow:
14:14	RW1CS	0x0	Csi0RemNdrCrdUnderflow:
13:13	RW1CS	0x0	Csi0RemDrsCrdUnderflow:
12:12	RW1CS	0x0	Csi0RemNcbCrdUnderflow:
11:11	RW1CS	0x0	Csi0RemNcsCrdUnderflow:
10:10	RW1CS	0x0	Csi0ADIngrOverwrite:
9:9	RW1CS	0x0	Csi0BLIngrOverwrite:
8:8	RW1CS	0x0	Csi0BLIngrOverflow:
7:7	RW1CS	0x0	Csi0VnaCrdMaxChk:
6:6	RW1CS	0x0	Csi0HomCrdMaxChk:
5:5	RW1CS	0x0	Csi0SnpCrdMaxChk:
4:4	RW1CS	0x0	Csi0NdrCrdMaxChk:
3:3	RW1CS	0x0	Csi0DrsCrdMaxChk:
2:2	RW1CS	0x0	Csi0NcbCrdMaxChk:
1:1	RW1CS	0x0	Csi0NcsCrdMaxChk:
0:0	RW1CS	0x0	Csi0TxQCrdMaxChk:

5.1.41 R3INGERRMASK0

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xc8		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
31:31	RWS	0x0	Csi0InvalidADArbMask:
30:30	RWS	0x0	Csi0Slot0NdrIngrNotValidMask:
29:29	RWS	0x0	Csi0Slot0SnpIngrNotValidMask:
28:28	RWS	0x0	Csi0Slot0HomIngrNotValidMask:
27:27	RWS	0x0	Csi0NcbIngrNotValidMask:
26:26	RWS	0x0	Csi0NcsIngrNotValidMask:
25:25	RWS	0x0	Csi0DrsIngrNotValidMask:
24:24	RWS	0x0	Csi0Slot1NdrIngrNotValidMask:
23:23	RWS	0x0	Csi0Slot1SnpIngrNotValidMask:
22:22	RWS	0x0	Csi0Slot1HomIngrNotValidMask:
21:21	RWS	0x0	Csi0LLResetTxNotIdleMask:
20:20	RWS	0x0	Csi0LLResetRxNotIdleMask:
19:19	RWS	0x0	Csi0TxQCrdUnderflowMask:



Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xc8		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
18:18	RWS	0x0	Csi0TxQCrdOverflowMask:
17:17	RWS	0x0	Csi0RemVnaCrdUnderflowMask:
16:16	RWS	0x0	Csi0RemHomCrdUnderflowMask:
15:15	RWS	0x0	Csi0RemSnpCrdUnderflowMask:
14:14	RWS	0x0	Csi0RemNdrCrdUnderflowMask:
13:13	RWS	0x0	Csi0RemDrsCrdUnderflowMask:
12:12	RWS	0x0	Csi0RemNcbCrdUnderflowMask:
11:11	RWS	0x0	Csi0RemNcsCrdUnderflowMask:
10:10	RWS	0x0	Csi0ADIngrOverwriteMask:
9:9	RWS	0x0	Csi0BLIngrOverwriteMask:
8:8	RWS	0x0	Csi0BLIngrOverflowMask:
7:7	RWS	0x0	Csi0VnaCrdMaxChkMask:
6:6	RWS	0x0	Csi0HomCrdMaxChkMask:
5:5	RWS	0x0	Csi0SnpCrdMaxChkMask:
4:4	RWS	0x0	Csi0NdrCrdMaxChkMask:
3:3	RWS	0x0	Csi0DrsCrdMaxChkMask:
2:2	RWS	0x0	Csi0NcbCrdMaxChkMask:
1:1	RWS	0x0	Csi0NcsCrdMaxChkMask:
0:0	RWS	0x0	Csi0TxQCrdMaxChkMask:

5.1.42 R3INGERRLOG1


Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xd4		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
31:31	RW1CS	0x0	Csi1InvalidADArb:
30:30	RW1CS	0x0	Csi1Slot0NdrIngrNotValid:
29:29	RW1CS	0x0	Csi1Slot0SnpIngrNotValid:
28:28	RW1CS	0x0	Csi1Slot0HomIngrNotValid:
27:27	RW1CS	0x0	Csi1NcbIngrNotValid:
26:26	RW1CS	0x0	Csi1NcsIngrNotValid:
25:25	RW1CS	0x0	Csi1DrsIngrNotValid:
24:24	RW1CS	0x0	Csi1Slot1NdrIngrNotValid:
23:23	RW1CS	0x0	Csi1Slot1SnpIngrNotValid:
22:22	RW1CS	0x0	Csi1Slot1HomIngrNotValid:
21:21	RW1CS	0x0	Csi1LLResetTxNotIdle:
20:20	RW1CS	0x0	Csi1LLResetRxNotIdle:
19:19	RW1CS	0x0	Csi1TxQCrdUnderflow:



Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0xd4			
Bit	Attr	Default	Description
18:18	RW1CS	0x0	Csi1TxQCrdOverflow:
17:17	RW1CS	0x0	Csi1RemVnaCrdUnderflow:
16:16	RW1CS	0x0	Csi1RemHomCrdUnderflow:
15:15	RW1CS	0x0	Csi1RemSnpCrdUnderflow:
14:14	RW1CS	0x0	Csi1RemNdrCrdUnderflow:
13:13	RW1CS	0x0	Csi1RemDrsCrdUnderflow:
12:12	RW1CS	0x0	Csi1RemNcbCrdUnderflow:
11:11	RW1CS	0x0	Csi1RemNcsCrdUnderflow:
10:10	RW1CS	0x0	Csi1ADIngrOverwrite:
9:9	RW1CS	0x0	Csi1BLIngrOverwrite:
8:8	RW1CS	0x0	Csi1BLIngrOverflow:
7:7	RW1CS	0x0	Csi1VnaCrdMaxChk:
6:6	RW1CS	0x0	Csi1HomCrdMaxChk:
5:5	RW1CS	0x0	Csi1SnpCrdMaxChk:
4:4	RW1CS	0x0	Csi1NdrCrdMaxChk:
3:3	RW1CS	0x0	Csi1DrsCrdMaxChk:
2:2	RW1CS	0x0	Csi1NcbCrdMaxChk:
1:1	RW1CS	0x0	Csi1NcsCrdMaxChk:
0:0	RW1CS	0x0	Csi1TxQCrdMaxChk:

5.1.43 R3INGERRMASK1

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 4
Bus: 1		Device: 19	Function: 4
Offset: 0xd8			
Bit	Attr	Default	Description
31:31	RWS	0x0	Csi1InvalidADArbMask:
30:30	RWS	0x0	Csi1Slot0NdrIngrNotValidMask:
29:29	RWS	0x0	Csi1Slot0SnpIngrNotValidMask:
28:28	RWS	0x0	Csi1Slot0HomIngrNotValidMask:
27:27	RWS	0x0	Csi1NcbIngrNotValidMask:
26:26	RWS	0x0	Csi1NcsIngrNotValidMask:
25:25	RWS	0x0	Csi1DrsIngrNotValidMask:
24:24	RWS	0x0	Csi1Slot1NdrIngrNotValidMask:
23:23	RWS	0x0	Csi1Slot1SnpIngrNotValidMask:
22:22	RWS	0x0	Csi1Slot1HomIngrNotValidMask:
21:21	RWS	0x0	Csi1LLResetTxNotIdleMask:
20:20	RWS	0x0	Csi1LLResetRxNotIdleMask:
19:19	RWS	0x0	Csi1TxQCrdUnderflowMask:



Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xd8		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
18:18	RWS	0x0	Csi1TxQCrdOverflowMask:
17:17	RWS	0x0	Csi1RemVnaCrdUnderflowMask:
16:16	RWS	0x0	Csi1RemHomCrdUnderflowMask:
15:15	RWS	0x0	Csi1RemSnpCrdUnderflowMask:
14:14	RWS	0x0	Csi1RemNdrCrdUnderflowMask:
13:13	RWS	0x0	Csi1RemDrsCrdUnderflowMask:
12:12	RWS	0x0	Csi1RemNcbCrdUnderflowMask:
11:11	RWS	0x0	Csi1RemNcsCrdUnderflowMask:
10:10	RWS	0x0	Csi1ADIngrOverwriteMask:
9:9	RWS	0x0	Csi1BLIngrOverwriteMask:
8:8	RWS	0x0	Csi1BLIngrOverflowMask:
7:7	RWS	0x0	Csi1VnaCrdMaxChkMask:
6:6	RWS	0x0	Csi1HomCrdMaxChkMask:
5:5	RWS	0x0	Csi1SnpCrdMaxChkMask:
4:4	RWS	0x0	Csi1NdrCrdMaxChkMask:
3:3	RWS	0x0	Csi1DrsCrdMaxChkMask:
2:2	RWS	0x0	Csi1NcbCrdMaxChkMask:
1:1	RWS	0x0	Csi1NcsCrdMaxChkMask:
0:0	RWS	0x0	Csi1TxQCrdMaxChkMask:

5.1.44 R3UTLSPARECSR

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xf4		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
31:1	RW_L	0x0	spare_defeature_bit_csr:
0:0	RW_L	0x0	RspFnResetCredit:

5.1.45 R3INGERRLOG_MISC

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0xf8		Function: 4	
		Function: 4	
Bit	Attr	Default	Description
3:3	RW1CS	0x0	Csi0BLIngrPtrReach:
2:2	RW1CS	0x0	Csi0ADIngrPtrReach:
1:1	RW1CS	0x0	Csi1BLIngrPtrReach:



Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19	Function:	4
Offset:	0xf8				
Bit	Attr	Default	Description		
0:0	RW1CS	0x0	Csi1ADIngrPtrReach:		

5.1.46 R3QDEBUG

Type:	CFG	Port ID:	N/A	Function:	4
Bus:	1	Device:	18	Function:	4
Bus:	1	Device:	19	Function:	4
Offset:	0xfc				
Bit	Attr	Default	Description		
1:1	RW_L	0x0	RspFnResetADS:		

5.2 Device 19 Function 5 - 6

The Device 19 registers address R3QP10 (Intel QPI Links 0 and 1).

Register Name	Offset	Size	Function
VID	0x0	16	5, 6
DID	0x2	16	5, 6
PCICMD	0x4	16	5, 6
PCISTS	0x6	16	5, 6
rid	0x8	8	5, 6
ccr	0x9	24	5, 6
CLSR	0xc	8	5, 6
PLAT	0xd	8	5, 6
HDR	0xe	8	5, 6
BIST	0xf	8	5, 6
SVID	0x2c	16	5, 6
SDID	0x2e	16	5, 6
CAPPTR	0x34	8	5, 6
INTL	0x3c	8	5, 6
INTPIN	0x3d	8	5, 6
MINGNT	0x3e	8	5, 6
MAXLAT	0x3f	8	5, 6
PMONCNTRLOWER0_0	0xa0	32	5
PMONCNTRLOWER1_0	0xa0	32	6
PMONCNTRUPPER0_0	0xa4	32	5
PMONCNTRUPPER1_0	0xa4	32	6
PMONCNTRLOWER0_1	0xa8	32	5
PMONCNTRLOWER1_1	0xa8	32	6
PMONCNTRUPPER0_1	0xac	32	5



Register Name	Offset	Size	Function
PMONCNTRUPPER1_1	0xac	32	6
PMONCNTRLOWER0_2	0xb0	32	5
PMONCNTRLOWER1_2	0xb0	32	6
PMONCNTRUPPER0_2	0xb4	32	5
PMONCNTRUPPER1_2	0xb4	32	6
PMONCNTRCFG0_0	0xd8	32	5
PMONCNTRCFG1_0	0xd8	32	6
PMONCNTRCFG0_1	0xdc	32	5
PMONCNTRCFG1_1	0xdc	32	6
PMONCNTRCFG0_2	0xe0	32	5
PMONCNTRCFG1_2	0xe0	32	6
PMONUNITCTRL0	0xf4	32	5
PMONUNITCTRL1	0xf4	32	6
PMONCTRSTATUS0	0xf8	32	5
PMONCTRSTATUS1	0xf8	32	6

5.2.1 VID

Type: CFG Port ID: N/A Bus: 1 Device: 18 Function: 5, 6 Bus: 1 Device: 19 Function: 5, 6 Offset: 0x0			
Bit	Attr	Default	Description
15:0	RO	0x8086	Vendor_Identification_Number:

5.2.2 DID

Type: CFG Port ID: N/A Bus: 1 Device: 18 Function: 5, 6 Bus: 1 Device: 19 Function: 5, 6 Offset: 0x2			
Bit	Attr	Default	Description
15:0	RO	0xe3e (Device 18 Function 5) 0xe3f (Device 18 Function 6) 0xe36 (Device 19 Function 5) 0xe37 (Device 19 Function 6)	Device_Identification_Number:



5.2.3 PCICMD

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0x4		Function: 5, 6	
		Function: 5, 6	
Bit	Attr	Default	Description
10:10	RO	0x0	INTx_Disable:
9:9	RO	0x0	Fast_Back_to_Back_Enable:
8:8	RO	0x0	SERR_Enable:
7:7	RO	0x0	IDSEL_Stepping_Wait_Cycle_Control:
6:6	RO	0x0	Parity_Error_Response:
5:5	RO	0x0	VGA_palette_snoop_Enable:
4:4	RO	0x0	Memory_Write_and_Invalidate_Enable:
3:3	RO	0x0	Special_Cycle_Enable:
2:2	RO	0x0	Bus_Master_Enable:
1:1	RO	0x0	Memory_Space_Enable:
0:0	RO	0x0	IO_Space_Enable:

5.2.4 PCISTS

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 19	
Offset: 0x6		Function: 5, 6	
		Function: 5, 6	
Bit	Attr	Default	Description
15:15	RO	0x0	Detected_Parity_Error:
14:14	RO	0x0	Signaled_System_Error:
13:13	RO	0x0	Received_Master_Abort:
12:12	RO	0x0	Received_Target_Abort:
11:11	RO	0x0	Signaled_Target_Abort:
10:9	RO	0x0	DEVSEL_Timing:
8:8	RO	0x0	Master_Data_Parity_Error:
7:7	RO	0x0	Fast_Back_to_Back:
6:6	RO	0x0	Reserved:
5:5	RO	0x0	Sixty_Six_MHz_capable:
4:4	RO	0x0	Capabilities_List:
3:3	RO	0x0	INTx_Status:



5.2.5 rid

Type: CFG Bus: 1 Bus: 1 Offset: 0x8		Port ID: N/A Device: 18 Device: 19 MSR Addr: N/A		Function: 5, 6 Function: 5, 6	
Bit	Attr	Default	Description		
7:0	RO_V	0x0	revision_id: Reflects the Uncore Revision ID after reset. Reflects the Compatibility Revision ID after BIOS writes 0x69 to any RID register in any Intel® Xeon® processor E5 v2 product family function. Implementation Note: Read and write requests from the host to any RID register in any Intel® Xeon® processor E5 v2 product family function are re-directed to the IIO cluster. Accesses to the CCR field are also redirected due to DWORD alignment. It is possible that JTAG accesses are direct, so will not always be redirected.		

5.2.6 ccr

Type: CFG Bus: 1 Bus: 1 Offset: 0x9		Port ID: N/A Device: 18 Device: 19 MSR Addr: N/A		Function: 5, 6 Function: 5, 6	
Bit	Attr	Default	Description		
23:16	RO_V	0x11	Base_class: Generic Device		
15:8	RO_V	0x1	Sub_class: Generic Device		
7:0	RO_V	0x0	Interface: 1		

5.2.7 CLSR

Type: CFG Bus: 1 Bus: 1 Offset: 0xc		Port ID: N/A Device: 18 Device: 19		Function: 5, 6 Function: 5, 6	
Bit	Attr	Default	Description		
7:0	RW	0x0	Cacheline_Size:		

5.2.8 PLAT

Type: CFG Bus: 1 Bus: 1 Offset: 0xd		Port ID: N/A Device: 18 Device: 19		Function: 5, 6 Function: 5, 6	
Bit	Attr	Default	Description		
7:0	RO	0x0	Primary_Latency_Timer:		



5.2.9 HDR

Type:	CFG	Port ID:	N/A	Function:	5, 6
Bus:	1	Device:	18	Function:	5, 6
Bus:	1	Device:	19	Function:	5, 6
Offset:	0xe				
Bit	Attr	Default	Description		
7:7	RO	0x1	Multi_function_Device:		
6:0	RO	0x0	Configuration_Layout:		

5.2.10 BIST

Type:	CFG	Port ID:	N/A	Function:	5, 6
Bus:	1	Device:	18	Function:	5, 6
Bus:	1	Device:	19	Function:	5, 6
Offset:	0xf				
Bit	Attr	Default	Description		
7:0	RO	0x0	BIST_Tests:		

5.2.11 SVID

Type:	CFG	Port ID:	N/A	Function:	5, 6
Bus:	1	Device:	18	Function:	5, 6
Bus:	1	Device:	19	Function:	5, 6
Offset:	0x2c				
Bit	Attr	Default	Description		
15:0	RW_O	0x8086	Subsystem_Vendor_Identification_Number:		

5.2.12 SDID

Type:	CFG	Port ID:	N/A	Function:	5, 6
Bus:	1	Device:	18	Function:	5, 6
Bus:	1	Device:	19	Function:	5, 6
Offset:	0x2e				
Bit	Attr	Default	Description		
15:0	RW_O	0x0	Subsystem_Device_Identification_Number:		

5.2.13 CAPPTR

Type:	CFG	Port ID:	N/A	Function:	5, 6
Bus:	1	Device:	18	Function:	5, 6
Bus:	1	Device:	19	Function:	5, 6
Offset:	0x34				
Bit	Attr	Default	Description		
7:0	RO	0x0	Capability_Pointer:		



5.2.14 INTL

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 5, 6
Bus: 1		Device: 19	Function: 5, 6
Offset: 0x3c			
Bit	Attr	Default	Description
7:0	RO	0x0	Interrupt_Line:

5.2.15 INTPIN

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 5, 6
Bus: 1		Device: 19	Function: 5, 6
Offset: 0x3d			
Bit	Attr	Default	Description
7:0	RO	0x0	Interrupt_Pin:

5.2.16 MINGNT

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 5, 6
Bus: 1		Device: 19	Function: 5, 6
Offset: 0x3e			
Bit	Attr	Default	Description
7:0	RO	0x0	Minimum_Grant_Value:

5.2.17 MAXLAT

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 5, 6
Bus: 1		Device: 19	Function: 5, 6
Offset: 0x3f			
Bit	Attr	Default	Description
7:0	RO	0x0	Maximum_Latency_Value:



5.2.18 PMONCNTRLOWER0_[0:2]

Type: CFG		Port ID: N/A	
PMONCNTRLOWER0_[0:2]:			
Bus: 1	Device: 18	Function: 5	
Bus: 1	Device: 19	Function: 5	
PMONCNTRLOWER1_[0:2]:			
Bus: 1	Device: 18	Function: 6	
Bus: 1	Device: 19	Function: 6	
Offset: 0xa0, 0xa8, 0xb0			
Bit	Attr	Default	Description
31:0	RW_V	0x0	pmonctrdata:

5.2.19 PMONCNTRUPPER[0:1]_[0:2]

Type: CFG		Port ID: N/A	
PMONCNTRUPPER0_[0:2]:			
Bus: 1	Device: 18	Function: 5	
Bus: 1	Device: 19	Function: 5	
PMONCNTRUPPER1_[0:2]:			
Bus: 1	Device: 18	Function: 6	
Bus: 1	Device: 19	Function: 6	
Offset: 0xa4, 0xac, 0xb4			
Bit	Attr	Default	Description
11:0	RW_V	0x0	pmonctrdata:

5.2.20 PMONCNTRCFG[0:1]_[0:2]

Type: CFG		Port ID: N/A	
PMONCNTRCFG0_[0:2]:			
Bus: 1	Device: 18	Function: 5	
Bus: 1	Device: 19	Function: 5	
PMONCNTRCFG1_[0:2]:			
Bus: 1	Device: 18	Function: 6	
Bus: 1	Device: 19	Function: 6	
Offset: 0xd8, 0xdc, 0xe0			
Bit	Attr	Default	Description
31:24	RW_V	0x0	threshold:
23:23	RW_V	0x0	invert:
22:22	RW_V	0x0	counteren:
21:21	RW_V	0x0	internal:
20:20	RW_V	0x0	ovfenable:
18:18	RW_V	0x0	edgedet:
17:17	WO	0x0	counterreset:
15:8	RW_V	0x0	unitmask:



Type: CFG		Port ID: N/A	
PMONNTRCFG0_[0:2]:			
Bus: 1		Device: 18	Function: 5
Bus: 1		Device: 19	Function: 5
PMONNTRCFG1_[0:2]:			
Bus: 1		Device: 18	Function: 6
Bus: 1		Device: 19	Function: 6
Offset: 0xd8,0xdc, 0xe0			
Bit	Attr	Default	Description
7:0	RW_V	0x0	evslct:

5.2.21 PMONUNITCTRL[0:1]

Type: CFG		Port ID: N/A	
PMONUNITCTRL0:			
Bus: 1		Device: 18	Function: 5
Bus: 1		Device: 19	Function: 5
PMONUNITCTRL1:			
Bus: 1		Device: 18	Function: 6
Bus: 1		Device: 19	Function: 6
Offset: 0xf4			
Bit	Attr	Default	Description
8:8	RW_V	0x0	freezecounters:
1:1	WO	0x0	resetcounters:
0:0	WO	0x0	resetcounterconfigs:

5.2.22 PMONCTRSTATUS[0:1]

Type: CFG		Port ID: N/A	
PMONCTRSTATUS0:			
Bus: 1		Device: 18	Function: 5
Bus: 1		Device: 19	Function: 5
PMONCTRSTATUS1:			
Bus: 1		Device: 18	Function: 6
Bus: 1		Device: 19	Function: 6
Offset: 0xf8			
Bit	Attr	Default	Description
2:2	RW1C	0x0	counter2ovf:
1:1	RW1C	0x0	counter1ovf:
0:0	RW1C	0x0	counter0ovf:



5.3 Device 20 Function 1

The Device 20 registers address R3QPI0 (Intel QPI Links 0 and 1).

Register Name	Offset	Size
VID	0x0	16
DID	0x2	16
PCICMD	0x4	16
PCISTS	0x6	16
rid	0x8	8
ccr	0x9	24
CLSR	0xc	8
PLAT	0xd	8
HDR	0xe	8
BIST	0xf	8
SVID	0x2c	16
SDID	0x2e	16
CAPPTR	0x34	8
INTL	0x3c	8
INTPIN	0x3d	8
MINGNT	0x3e	8
MAXLAT	0x3f	8
RC_IOTHUB_CR0	0xe0	32
RC_IOTHUB_CR1	0xe4	32
RC_IOTHUB_CR2	0xe8	32
RC_IOTHUB_CR3	0xec	32
RC_IOTEGR_CR0	0xf0	32
RC_IOTEGR_CR1	0xf4	32
RC_IOTEGR_CR2	0xf8	32
RC_IOTEGR_CR3	0xfc	32

5.3.1 VID

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 20	
Offset: 0x0		Function: 1	
Function: 1			
Bit	Attr	Default	Description
15:0	RO	0x8086	Vendor_Identification_Number:



5.3.2 DID

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 1
Bus: 1		Device: 20	Function: 1
Offset: 0x2			
Bit	Attr	Default	Description
15:0	RO	0xe7f (Device 18) 0xe77 (Device 20)	Device_Identification_Number:

5.3.3 PCICMD

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 1
Bus: 1		Device: 20	Function: 1
Offset: 0x4			
Bit	Attr	Default	Description
10:10	RO	0x0	INTx_Disable:
9:9	RO	0x0	Fast_Back_to_Back_Enable:
8:8	RO	0x0	SERR_Enable:
7:7	RO	0x0	IDSEL_Stepping_Wait_Cycle_Control:
6:6	RO	0x0	Parity_Error_Response:
5:5	RO	0x0	VGA_palette_snoop_Enable:
4:4	RO	0x0	Memory_Write_and_Invalidate_Enable:
3:3	RO	0x0	Special_Cycle_Enable:
2:2	RO	0x0	Bus_Master_Enable:
1:1	RO	0x0	Memory_Space_Enable:
0:0	RO	0x0	IO_Space_Enable:

5.3.4 PCISTS

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 1
Bus: 1		Device: 20	Function: 1
Offset: 0x6			
Bit	Attr	Default	Description
15:15	RO	0x0	Detected_Parity_Error:
14:14	RO	0x0	Signaled_System_Error:
13:13	RO	0x0	Received_Master_Abort:
12:12	RO	0x0	Received_Target_Abort:
11:11	RO	0x0	Signaled_Target_Abort:
10:9	RO	0x0	DEVSEL_Timing:
8:8	RO	0x0	Master_Data_Parity_Error:
7:7	RO	0x0	Fast_Back_to_Back:
6:6	RO	0x0	Reserved:



Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 1
Bus: 1		Device: 20	Function: 1
Offset: 0x6			
Bit	Attr	Default	Description
5:5	RO	0x0	Sixty_Six_MHz_capable:
4:4	RO	0x0	Capabilities_List:
3:3	RO	0x0	INTx_Status:

5.3.5 rid

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 1
Bus: 1		Device: 20	Function: 1
Offset: 0x8		MSR Addr:N/A	
Bit	Attr	Default	Description
7:0	RO_V	0x0	revision_id: Reflects the Uncore Revision ID after reset. Reflects the Compatibility Revision ID after BIOS writes 0x69 to any RID register in any Intel® Xeon® processor E5 v2 product family function. Implementation Note: Read and write requests from the host to any RID register in any Intel® Xeon® processor E5 v2 product family function are re-directed to the IIO cluster. Accesses to the CCR field are also redirected due to DWORD alignment. It is possible that JTAG accesses are direct, so will not always be redirected.

5.3.6 ccr

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 1
Bus: 1		Device: 20	Function: 1
Offset: 0x9		MSR Addr:N/A	
Bit	Attr	Default	Description
23:16	RO_V	0x8	Base_class: Generic Device
15:8	RO_V	0x80	Sub_class: Generic Device
7:0	RO_V	0x0	Register_level_programming_interface: Set to 00h for all non-APIC devices.

5.3.7 CLSR

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	Function: 1
Bus: 1		Device: 20	Function: 1
Offset: 0xc			
Bit	Attr	Default	Description
7:0	RW	0x0	Cacheline_Size:



5.3.8 PLAT

Type:	CFG	Port ID:	N/A	Function:	1
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0xd				
Bit	Attr	Default	Description		
7:0	RO	0x0	Primary_Latency_Timer:		

5.3.9 HDR

Type:	CFG	Port ID:	N/A	Function:	1
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0xe				
Bit	Attr	Default	Description		
7:7	RO	0x1	Multi_function_Device:		
6:0	RO	0x0	Configuration_Layout:		

5.3.10 BIST

Type:	CFG	Port ID:	N/A	Function:	1
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0xf				
Bit	Attr	Default	Description		
7:0	RO	0x0	BIST_Tests:		

5.3.11 SVID

Type:	CFG	Port ID:	N/A	Function:	1
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0x2c				
Bit	Attr	Default	Description		
15:0	RW_O	0x8086	Subsystem_Vendor_Identification_Number:		

5.3.12 SDID

Type:	CFG	Port ID:	N/A	Function:	1
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0x2e				
Bit	Attr	Default	Description		
15:0	RW_O	0x0	Subsystem_Device_Identification_Number:		



5.3.13 CAPPTR

Type:	CFG	Port ID:	N/A		
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0x34				
Bit	Attr	Default	Description		
7:0	RO	0x0	Capability_Pointer:		

5.3.14 INTL

Type:	CFG	Port ID:	N/A		
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0x3c				
Bit	Attr	Default	Description		
7:0	RO	0x0	Interrupt_Line:		

5.3.15 INTPIN


Type:	CFG	Port ID:	N/A		
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0x3d				
Bit	Attr	Default	Description		
7:0	RO	0x0	Interrupt_Pin:		

5.3.16 MINGNT

Type:	CFG	Port ID:	N/A		
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0x3e				
Bit	Attr	Default	Description		
7:0	RO	0x0	Minimum_Grant_Value:		

5.3.17 MAXLAT

Type:	CFG	Port ID:	N/A		
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0x3f				
Bit	Attr	Default	Description		
7:0	RO	0x0	Maximum_Latency_Value:		



5.3.18 RC_IOTHUB_CR0

Type:	CFG	Port ID:	N/A	Function:	1
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0xe0				
Bit	Attr	Default	Description		
31:0	RW	0x0	HubCreg0(HubCr0_Field_31_0): hub cr0		

5.3.19 RC_IOTHUB_CR1

Type:	CFG	Port ID:	N/A	Function:	1
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0xe4				
Bit	Attr	Default	Description		
31:0	RW	0x0	HubCreg1(HubCr1_Field_31_0): hub cr1		

5.3.20 RC_IOTHUB_CR2

Type:	CFG	Port ID:	N/A	Function:	1
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0xe8				
Bit	Attr	Default	Description		
31:0	RW	0x0	HubCreg2(HubCr2_Field_31_0): hub cr2		

5.3.21 RC_IOTHUB_CR3

Type:	CFG	Port ID:	N/A	Function:	1
Bus:	1	Device:	18	Function:	1
Bus:	1	Device:	20	Function:	1
Offset:	0xec				
Bit	Attr	Default	Description		
31:0	RW	0x0	HubCreg3(HubCr3_Field_31_0): hub cr3		



5.3.22 RC_IOTEGR_CRO

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 20	
Offset: 0xf0		Function: 1	
Function: 1			
Bit	Attr	Default	Description
31:31	RW	0x0	IotEgrLut03_Pol1: lut polarity 1
30:30	RW	0x0	IotEgrLut03_Pol0: lut polarity 0
29:29	RW	0x0	IotEgrLut03_Dir: lut direction
28:28	RW	0x0	IotEgrLut03_ForMe: lut forme bit
27:24	RW	0x0	IotEgrLut03_AgentID: lut agent id
23:23	RW	0x0	IotEgrLut02_Pol1: lut polarity 1
22:22	RW	0x0	IotEgrLut02_Pol0: lut polarity 0
21:21	RW	0x0	IotEgrLut02_Dir: lut direction
20:20	RW	0x0	IotEgrLut02_ForMe: lut forme bit
19:16	RW	0x0	IotEgrLut02_AgentID: lut agent id
15:15	RW	0x0	IotEgrLut01_Pol1: lut polarity 1
14:14	RW	0x0	IotEgrLut01_Pol0: lut polarity 0
13:13	RW	0x0	IotEgrLut01_Dir: lut direction
12:12	RW	0x0	IotEgrLut01_ForMe: lut forme bit
11:8	RW	0x0	IotEgrLut01_AgentID: lut agent id
7:7	RW	0x0	IotEgrLut00_Pol1: lut polarity 1
6:6	RW	0x0	IotEgrLut00_Pol0: lut polarity 0
5:5	RW	0x0	IotEgrLut00_Dir: lut direction
4:4	RW	0x0	IotEgrLut00_ForMe: lut forme bit
3:0	RW	0x0	IotEgrLut00_AgentID: lut agent id



5.3.23 RC_IOTEGR_CR1

Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 20	
Offset: 0xf4		Function: 1	
Function: 1			
Bit	Attr	Default	Description
31:31	RW	0x0	IotEgrLut07_Pol1: lut polarity 1
30:30	RW	0x0	IotEgrLut07_Pol0: lut polarity 0
29:29	RW	0x0	IotEgrLut07_Dir: lut direction
28:28	RW	0x0	IotEgrLut07_ForMe: lut forme bit
27:24	RW	0x0	IotEgrLut07_AgentID: lut agent id
23:23	RW	0x0	IotEgrLut06_Pol1: lut polarity 1
22:22	RW	0x0	IotEgrLut06_Pol0: lut polarity 0
21:21	RW	0x0	IotEgrLut06_Dir: lut direction
20:20	RW	0x0	IotEgrLut06_ForMe: lut forme bit
19:16	RW	0x0	IotEgrLut06_AgentID: lut agent id
15:15	RW	0x0	IotEgrLut05_Pol1: lut polarity 1
14:14	RW	0x0	IotEgrLut05_Pol0: lut polarity 0
13:13	RW	0x0	IotEgrLut05_Dir: lut direction
12:12	RW	0x0	IotEgrLut05_ForMe: lut forme bit
11:8	RW	0x0	IotEgrLut05_AgentID: lut agent id
7:7	RW	0x0	IotEgrLut04_Pol1: lut polarity 1
6:6	RW	0x0	IotEgrLut04_Pol0: lut polarity 0
5:5	RW	0x0	IotEgrLut04_Dir: lut direction
4:4	RW	0x0	IotEgrLut04_ForMe: lut forme bit
3:0	RW	0x0	IotEgrLut04_AgentID: lut agent id



5.3.24 RC_IOTEGR_CR2

Type:	CFG	Port ID:	N/A
Bus:	1	Device:	18
Bus:	1	Device:	20
Offset:	0xf8	Function:	1
		Function:	1

bit	Attr	Default	Description
31:16	RW	0x0	RSVD
15:15	RW	0x0	lotEgrLut09_Pol1: lut polarity 1
14:14	RW	0x0	lotEgrLut09_Pol0: lut polarity 0
13:13	RW	0x0	lotEgrLut09_Dir: lut direction
12:12	RW	0x0	lotEgrLut09_ForMe: lut forme bit
11:8	RW	0x0	lotEgrLut09_AgentID: lut agent id
7:7	RW	0x0	lotEgrLut08_Pol1: lut polarity 1
6:6	RW	0x0	lotEgrLut08_Pol0: lut polarity 0
5:5	RW	0x0	lotEgrLut08_Dir: lut direction
4:4	RW	0x0	lotEgrLut08_ForMe: lut forme bit
3:0	RW	0x0	lotEgrLut08_AgentID: lut agent id

5.3.25 RC_IOTEGR_CR3

Type:	CFG	Port ID:	N/A
Bus:	1	Device:	18
Bus:	1	Device:	20
Offset:	0xfc	Function:	1
		Function:	1

Bit	Attr	Default	Description
31:16	RW	0x0	RSVD
15:15	RW	0x0	lotEgrLut09_En: lut entry 9 enable
14:14	RW	0x0	lotEgrLut08_En: lut entry 8 enable
13:13	RW	0x0	lotEgrLut07_En: lut entry 7 enable
12:12	RW	0x0	lotEgrLut06_En: lut entry 6 enable
11:11	RW	0x0	lotEgrLut05_En: lut entry 5 enable
10:10	RW	0x0	lotEgrLut04_En: lut entry 4 enable



Type: CFG		Port ID: N/A	
Bus: 1		Device: 18	
Bus: 1		Device: 20	
Offset: 0xfc		Function: 1	
Function: 1			
9:9	RW	0x0	lotEgrLut03_En: lut entry 3 enable
8:8	RW	0x0	lotEgrLut02_En: lut entry 2 enable
7:7	RW	0x0	lotEgrLut01_En: lut entry 1 enable
6:6	RW	0x0	lotEgrLut00_En: lut entry 0 enable
5:5	RW	0x0	lotEgrLutLoadTorCred: load lut tor credits
4:0	RW	0x0	lotEgrLutTorCred: lut tor credits

§





6 Processor Utility Box (UBOX) Registers

The UBOX is the piece of processor logic that deals with the non mainstream flows in the system. This includes transactions like the register accesses, interrupt flows, lock flows and events. In addition, the UBOX houses coordination for the performance architecture, and also houses scratchpad and semaphore registers.

6.1 Device 11 Function 0

DID		VID		0h		80h
PCISTS		PCICMD		4h		84h
CCR			RID	8h		88h
BIST	HDR	PLAT	CLSR	Ch		8Ch
				10h		90h
				14h		94h
				18h		98h
				1Ch		9Ch
				20h		A0h
				24h		A4h
				28h		A8h
SDID		SVID		2Ch		ACh
				30h		B0h
				CAPPTR		34h
				38h		B8h
				MAXLAT		MINGNT
CPUNODEID				40h		C0h
				44h		C4h
				IntControl		48h
				4Ch		CCh
				50h		D0h
GIDNIDMAP				54h		D4h
				58h		D8h
				5Ch		DCh
CoreCount				60h		E0h
UBOXErrSts				64h		E4h
				68h		E8h
				6Ch		ECh
				70h		F0h



	74h		F4h
	78h		F8h
	7Ch		FCh

6.1.1 CPUNODEID

Node ID Configuration Register

Type: CFG		Port ID: N/A	
Bus: 1		Device: 11	
Offset: 0x40		Function: 0	
Bit	Attr	Default	Description
15:13	RW_LB	0x0	Node Controller Node Id(NodeCtrlId): Node ID of the Node Controller. Set by the BIOS.
12:10	RW_LB	0x0	NodeID of the legacy socket(LgcNodeid): NodeID of the legacy socket
7:5	RW_LB	0x0	Nodeid of the lock master(LockNodeid): Nodeid of the lock master
2:0	RW_LB	0x0	Nodeid of the local register(LclNodeid): Node Id of the local Socket

6.1.2 IntControl

Interrupt Configuration Register

Type: CFG		Port ID: N/A	
Bus: 1		Device: 11	
Offset: 0x48		Function: 0	
Bit	Attr	Default	Description
18:18	RW_LB	0x0	IA32 Logical Flat or Cluster Mode Override Enable(LogFlatClustOvrEn): 0 : IA32 Logical Flat or Cluster Mode bit is locked as Read only bit. 1 : IA32 Logical Flat or Cluster Mode bit may be written by SW, values written by xTPR update are ignored. For one time override of the IA-32 Logical Flat or Cluster Mode value, return this bit to it's default state after the bit is changed. Leaving this bit as '1' will prevent automatic update of the filter.
17:17	RW_LBV	0x0	IA32 Logical Flat or Cluster Mode(LogFitClustMod): Set by BIOS to indicate if the OS is running logical flat or logical cluster mode. This bit can also be updated by IntPrioUpd messages. This bit reflects the setup of the filter at any given time. 0 - flat, 1 - cluster.
16:16	RW_LB	0x0	Cluster Check Sampling Mode(ClastChkSmpMod): 0: Disable checking for Logical_APICID[31:0] being non-zero when sampling flat cluster mode bit in the IntPrioUpd message as part of setting bit 1 in this register 1: Enable the above checking



Type: CFG		Port ID: N/A	
Bus: 1		Device: 11	
Offset: 0x48		Function: 0	
Bit	Attr	Default	Description
10:8	RW_LB	0x0	<p>Vecor Based Hashe Mode Control(HashModCtr):</p> <p>Indicates the hash mode control for the interrupt control.</p> <p>Select the hush function for the Vector based Hash Mode interrupt redirection control :</p> <p>000 select bits 7:4 / 5:4 for vector cluster / flat algorithm 001 select bits 6:3 / 4:3 010 select bits 4:1 / 2:1 011 select bits 3:0 / 1:0 other - reserved</p>
6:4	RW_LB	0x0	<p>Redirection Mode Select for Logical Interrupts(RdrModSel):</p> <p>Selects the redirection mode used for MSI interrupts with lowest-priority delivery mode. The following schemes are used:</p> <p>000 : Fixed Priority - select the first enabled APIC in the cluster. 001: Redirect last - last vector selected (applicable only in extended mode) 010 : Hash Vector - select the first enabled APIC in round robin manner starting form the hash of the vector number.</p> <p>100: Fixed Priority - with PLAIR. 101: Redirect Last - with PLAIR. 110: Hash Vector - with PLAIR.</p> <p>default: Fixed Priority</p>
1:1	RW_LB	0x0	<p>Force to X2 APIC Mode(ForceX2APIC):</p> <p>Write:</p> <p>1: Forces the system to move into X2APIC Mode. 0: No affect</p>
0:0	RW_LB	0x1	<p>Extended APIC Enable(xApicEn):</p> <p>Set this bit if you would like extended XAPIC configuration to be used. This bit can be written directly, and can also be updated using XTPR messages</p>

6.1.3 GIDNIDMAP

Node ID Mapping Register.

Mapping between group id and nodeid

Type: CFG		Port ID: N/A	
Bus: 1		Device: 11	
Offset: 0x54		Function: 0	
Bit	Attr	Default	Description
23:21	RW_LB	0x0	Node Id 7(NodeId7): NodeId for group id 7
20:18	RW_LB	0x0	Node Id 6(NodeId6): Node Id for group 6



Type: CFG		Port ID: N/A	
Bus: 1		Device: 11	
Offset: 0x54		Function: 0	
Bit	Attr	Default	Description
17:15	RW_LB	0x0	Node Id 5(NodeId5): Node Id for group 5
14:12	RW_LB	0x0	Node Id 4(NodeId4): Node Id for group id 4
11:9	RW_LB	0x0	Node Id 3(NodeId3): Node Id for group 3
8:6	RW_LB	0x0	Node Id 2(NodeId2): Node Id for group Id 2
5:3	RW_LB	0x0	Node Id 1(NodeId1): Node Id for group Id 1
2:0	RW_LB	0x0	Node Id 0(NodeId0): Node Id for group 0

6.1.4 CoreCount

Number of Cores

Reflection of the LTCCount2 register

Type: CFG		Port ID: N/A	
Bus: 1		Device: 11	
Offset: 0x60		Function: 0	
Bit	Attr	Default	Description
4:0	RO_V	0x0	Core Count(CoreCount): Reflection of the LTCCount2

6.1.5 UBOXErrSts

This is error status register in the UBOX and covers most of the interrupt related errors.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 11	
Offset: 0x64		Function: 0	
Bit	Attr	Default	Description
23:18	RWS_V	0x0	Message Channel Tracker TimeOut(Msg_Ch_Tkr_TimeOut): Message Channel Tracker TimeOut. This error occurs when any NP request doesn't receive response in 4K cycles. The event is SV use and logging only, not signaling
17:17	RWS_V	0x0	Message Channel Tracker Error(Msg_Ch_Tkr_Err): Message Channel Tracker Error. This error occurs such case that illegal broad cast port ID access to the message channel. The event is SV use and logging only, not signaling as Ubox error.
16:16	RW_V	0x0	SMI delivery valid(SMI_delivery_valid): SMI interrupt delivery status valid, write 1'b1 to clear valid status



Type: CFG		Port ID: N/A	
Bus: 1		Device: 11	
Offset: 0x64		Function: 0	
Bit	Attr	Default	Description
15:8	RO_V	0x0	Reserved: Reserved
7:7	RWS_V	0x0	MasterLock Timeout received by UBOX(MasterLockTimeOut): Master Lock Timeout received by UBOX
6:6	RWS_V	0x0	SMI Timeout received by UBOX(SMITimeOut): SMI Timeout received by UBOX
5:5	RWS_V	0x0	MMCFG Write Address Misalignment received by UBOX(CFGWrAddrMisAligned): MMCFG Write Address Misalignment received by UBOX
4:4	RWS_V	0x0	MMCFG Read Address Misalignment received by UBOX(CFGRdAddrMisAligned): MMCFG Read Address Misalignment received by UBOX
3:3	RWS_V	0x0	Unsupported Opcode received by UBOX(UnsupportedOpcode): Unsupported opcode received by UBOX
2:2	RWS_V	0x0	Poison was received by UBOX(PoisonRsvd): UBOX received a poisoned transaction
1:1	RWS_V	0x0	SMI source iMC(SMISrciMC): SMI is caused due to an indication from the iMC
0:0	RWS_V	0x0	SMI is caused due to a locally generated UMC(SMISrcUMC): This is a bit that indicates that an SMI was caused due to a locally generated UMC


6.2 Device 11 Function 2

DID		VID		0h	80h	
PCISTS		PCICMD		4h	84h	
CCR			RID	8h	88h	
BIST	HDR	PLAT	CLSR	Ch	8Ch	
				10h	90h	
				14h	94h	
				18h	98h	
				1Ch	9Ch	
				20h	A0h	
				24h	A4h	
				28h	A8h	
SDID		SVID		2Ch	ACh	
				30h	B0h	
				CAPPTR	34h	B4h
					38h	B8h
MAXLAT	MINGNT	INTPIN	INTL	3Ch	BCh	
				40h	C0h	
				44h	C4h	



6.3 Device 11 Function 3

DID		VID		0h		80h				
PCISTS		PCICMD		4h		84h				
CCR			RID	8h		88h				
BIST	HDR	PLAT	CLSR	Ch		8Ch				
				10h		90h				
				14h		94h				
				18h		98h				
				1Ch		9Ch				
				20h		A0h				
				24h		A4h				
				28h		A8h				
SDID		SVID		2Ch		ACh				
				30h		B0h				
				CAPPTR		34h	B4h			
				38h		B8h				
MAXLAT	MINGNT	INTPIN	INTL	3Ch		BCh				
				40h		C0h				
				44h		C4h				
				48h		C8h				
				4Ch		CCh				
				50h		D0h				
				54h		D4h				
				58h		SMICtrl		D8h		
				5Ch						DCh
				60h						E0h
				64h						E4h
				68h						E8h
6Ch	ECh									
70h	F0h									
74h	F4h									
78h	F8h									
7Ch	FCh									



6.3.1 CPUBUSNO

Bus Number Configuration for the Intel® Xeon® processor E5 v2 product family.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 11	
Offset: 0xd0		Function: 3	
Bit	Attr	Default	Description
31:31	RW_LB	0x0	Valid: Indicates whether the bus numbers have been initialized or not
15:8	RW_LB	0x0	CPU Bus Number 1(CPUBUSNO1): Bus Number for non IIO devices in the uncore
7:0	RW_LB	0x0	CPU Bus Number 0(CPUBUSNO0): Bus Number for IIO devices

6.3.2 SMI Ctrl

SMI generation control

Type: CFG		Port ID: N/A	
Bus: 1		Device: 11	
Offset: 0xd8		Function: 3	
Bit	Attr	Default	Description
27:27	RW_LB	0x0	Disable Generation of SMI for new Ubox erros(SMIDis3): Disable generation of SMI from message channel
26:26	RW_LB	0x1	Disable Generation of SMI for new Ubox erros(SMIDis2): Disable generation of SMI for new Ubox errors
25:25	RW_LB	0x0	Disable Generation of SMI (all)(SMIDis): Disable generation of SMI
24:24	RW_LB	0x0	UMC SMI Enable (UMCSMIEn): This is the enable bit that enables SMI generation due to a UMC 1 - Generate SMI after the threshold counter expires. 0 - Disable generation of SMI
19:0	RW_LB	0x0	SMI generation threshold (Threshold): This is the countdown that happens in the hardware before an SMI is generated due to a UMC

§





7 Power Controller Unit (PCU) Register

7.1 Device 10 Function 0

DID		VID		0h		80h		
PCISTS		PCICMD		4h	PACKAGE_POWER_SKU	84h		
CCR			RID	8h		88h		
BIST	HDR	PLAT	CLSR	Ch	PACKAGE_POWER_SKU_UNIT	8Ch		
				10h	PACKAGE_ENERGY_STATUS	90h		
				14h		94h		
				18h		98h		
				1Ch		9Ch		
				20h		A0h		
				24h		A4h		
				28h		A8h		
SDID		SVID		2Ch		ACh		
				30h		B0h		
				CAPPTR		34h		B4h
								38h
MAXLAT	MINGNT	INTPIN	INTL	3Ch		BCh		
				40h		C0h		
				44h		C4h		
				48h	Package_Temperature	C8h		
				4Ch		CCh		
				50h		D0h		
				54h	PCU_REFERENCE_CLOCK	D4h		
				58h	P_STATE_LIMITS	D8h		
				5Ch		DCh		
MEM_TRML_TEMPERATURE_REPORT				60h		E0h		
MEM_ACCUMULATED_BW_CH_0				64h	TEMPERATURE_TARGET	E4h		
MEM_ACCUMULATED_BW_CH_1				68h		E8h		
MEM_ACCUMULATED_BW_CH_2				6Ch		ECh		
MEM_ACCUMULATED_BW_CH_3				70h		F0h		
				74h		F4h		
				78h		F8h		
				7Ch		FCh		
DID		VID		0h		80h		



7.1.1 MEM_TRML_TEMPERATURE_REPORT

This register is used to report the thermal status of the memory.

The channel max temperature field is used to report the maximal temperature of all ranks.

THIS REGISTER IS DUPLICATED IN THE PCU IO SPACE, CHANGES MUST BE MADE IN BOTH PLACES.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x60		Function: 0	
Bit	Attr	Default	Description
31:24	RO_V	0x0	Channel 3 Maximum Temperature(Channel3_Max_Temperature): Temperature in Degrees (C).
23:16	RO_V	0x0	Channel 2 Maximum Temperature(Channel2_Max_Temperature): Temperature in Degrees (C).
15:8	RO_V	0x0	Channel 1 Maximum Temperature(Channel1_Max_Temperature): Temperature in Degrees (C).
7:0	RO_V	0x0	Channel 0 Maximum Temperature(Channel0_Max_Temperature): Temperature in Degrees (C).

7.1.2 MEM_ACCUMULATED_BW_CH_[0:3]

This register contains a measurement proportional to the weighted DRAM BW for the channel including all ranks. The weights are configured in the memory controller channel register PM_CMD_PWR.

THIS REGISTER IS DUPLICATED IN THE PCU IO SPACE, CHANGES MUST BE MADE IN BOTH PLACES.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x64, 0x68, 0x6c, 0x70		Function: 0	
Bit	Attr	Default	Description
31:0	RO_V	0x0	Data(DATA): The weighted BW value is calculated by the memory controller based on the following formula: $\text{NumPrecharge} * \text{PM_CMD_PWR}[\text{PWR_RAS_PRE}] +$ $\text{NumReads} * \text{PM_CMD_PWR}[\text{PWR_CAS_R}] +$ $\text{NumWrites} * \text{PM_CMD_PWR}[\text{PWR_CAS_W}]$



7.1.3 PACKAGE_POWER_SKU

Defines allowed SKU power and timing parameters.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x84		Function: 0	
Bit	Attr	Default	Description
54:48	RO_V	0x18	Maximal Time Window(PKG_MAX_WIN): The maximal time window allowed for the SKU. Higher values will be clamped to this value. The timing interval window is Floating Point number given by $\text{power}(2, \text{PKG_MAX_WIN})$. The unit of measurement is defined in PACKAGE_POWER_SKU_UNIT_MSR[TIME_UNIT].
46:32	RO_V	0x258	Maximal Package Power(PKG_MAX_PWR): The maximal package power setting allowed for the SKU. Higher values will be clamped to this value. The maximum setting is typical not guaranteed. The units for this value are defined in PACKAGE_POWER_SKU_UNIT_MSR[PWR_UNIT].
30:16	RO_V	0x78	Minimal Package Power(PKG_MIN_PWR): The minimal package power setting allowed for the SKU. Lower values will be clamped to this value. The minimum setting is typical not guaranteed. The units for this value are defined in PACKAGE_POWER_SKU_UNIT_MSR[PWR_UNIT].
14:0	RO_V	0x118	TDP Package Power(PKG_TDP): The TDP package power setting allowed for the SKU. The TDP setting is typical not guaranteed. The units for this value are defined in PACKAGE_POWER_SKU_UNIT_MSR[PWR_UNIT].

7.1.4 PACKAGE_POWER_SKU_UNIT

Defines units for calculating SKU power and timing parameters.

PCODE will update the contents of this register.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x8c		Function: 0	
Bit	Attr	Default	Description
19:16	RO_V	0xa	Time Unit(TIME_UNIT): Time Units used for power control registers. The actual unit value is calculated by $1 / \text{Power}(2, \text{TIME_UNIT})$ second. The default value of 0Ah corresponds to 976 usec.
12:8	RO_V	0x10	Energy Units(ENERGY_UNIT): Energy Units used for power control registers. The actual unit value is calculated by $1 / \text{Power}(2, \text{ENERGY_UNIT})$ J. The default value of 10h corresponds to 15.3 uJ.
3:0	RO_V	0x3	Power Units(PWR_UNIT): Power Units used for power control registers. The actual unit value is calculated by $1 / \text{Power}(2, \text{PWR_UNIT})$ W. The default value of 0011b corresponds to 18 W.



7.1.5 PACKAGE_ENERGY_STATUS

Package energy consumed by the entire PCODE including IA, GT and uncore. The counter will wrap around and continue counting when it reaches its limit.

The energy status is reported in units which are defined in PACKAGE_POWER_SKU_UNIT_MSR[ENERGY_UNIT].

The data is updated by PCODE and is Read Only for all SW.

THIS REGISTER IS DUPLICATED IN THE PCU IO SPACE, CHANGES MUST BE MADE IN BOTH PLACES.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x90		Function: 0	
Bit	Attr	Default	Description
31:0	RO_V	0x0	Energy Value(DATA): Energy Value

7.1.6 Package_Temperature

Package temperature in degrees (C). This field is updated by FW.

THIS REGISTER IS DUPLICATED IN THE PCU IO SPACE, CHANGES MUST BE MADE IN BOTH PLACES.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0xc8		Function: 0	
Bit	Attr	Default	Description
7:0	RO_V	0x0	Temperature(DATA): Package temperature in degrees (C).

7.1.7 P_State_Limits

This register allows SW to limit the maximum frequency allowed during run-time.

PCODE will sample this register in slow loop.

Functionality added in B-step.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0xd8		Function: 0	
Bit	Attr	Default	Description
31:31	RW_KL	0x0	Lock(LOCK): This bit will lock all settings in this register.



Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0xd8		Function: 0	
Bit	Attr	Default	Description
15:8	RW_L	0x0	P-State Offset(PSTT_OFFSET): HW P-State control on the relative offset from P1. The offset field determines the number of bins to drop P1 (dynamically).
7:0	RW_L	0xff	P-State Limitation(PSTT_LIM): This field indicates the maximum frequency limit allowed during run-time.

7.1.8 TEMPERATURE_TARGET

Legacy register holding temperature related constants for Platform use. This register is updated by FW.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0xe4		Function: 0	
Bit	Attr	Default	Description
27:24	RO_V	0x0	TJ Max TCC Offset(TJ_MAX_TCC_OFFSET): Temperature offset in degrees (C) from the TJ Max. Used for throttling temperature. Will not impact temperature reading. If offset is allowed and set - the throttle will occur and reported at lower than Tjmax
23:16	RO_V	0x0	Thermal Monitor Reference Temperature(REF_TEMP): This field indicates the maximum junction temperature, also referred to as the throttle temperature, TCC activation temperature or prochot temperature. This is the temperature at which the Thermal Monitor is activated. FW will update this register with the following value: 125 minus FUSE TJMAXOFFSET.
15:8	RO_V	0x0	Fan Temperature target offset(FAN_TEMP_TARGET_OFST): Fan Temperature target offset a.k.a. T-Control. Indicates the relative offset from the Thermal Monitor Trip Temperature at which fans should be engaged.

7.1.9 SSKPD

Sticky Scratchpad Data.

This register holds 64 writable bits with no functionality behind them. It is for the convenience of BIOS and graphics drivers.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x6c		Function: 1	
Bit	Attr	Default	Description
63:0	RWS	0x0	Scratchpad Data(SKPD): 4 WORDs of data storage.



DID		VID		0h		80h
PCISTS		PCICMD		4h		84h
CCR			RID	8h		88h
BIST	HDR	PLAT	CLSR	Ch		8Ch
				10h		90h
				14h		94h
				18h		98h
				1Ch		9Ch
				20h		A0h
				24h		CSR_DESIRED_CORES
				28h	A8h	
				30h	ACh	
SDID		SVID		2Ch		B0h
			CAPPTR	34h		B4h
			38h	M_COMP		B8h
MAXLAT	MINGNT	INTPIN	INTL	3Ch		BCh
				40h		C0h
				44h		C4h
				48h		C8h
				4Ch		CCh
				50h		D0h
				54h		D4h
				58h		D8h
				5Ch		DCh
				60h		E0h
				64h		E4h
68h	E8h					
SSKPD				6Ch		ECh
C2C3TT				70h		F0h
				74h	F4h	
				78h	F8h	
				7Ch	FCh	

7.1.10 C2C3TT

C2 to C3 Transition Timer.

BIOS can update this value during run-time.

Unit for this register is usec. So we have a range of 0-4095 us.



Type: CFG PortID:N/A Bus: 1 Device:10Function:1 Offset: 0x74			
Bit	Attr	Default	Description
11:0	RW	0x32	Pop Down Initialization Value(PPDN_INIT): Value in micro-seconds.

7.1.11 CSR_DESIRED_CORES

Number of cores/threads BIOS wants to exist on the next reset. A processor reset must be used for this register to take effect. Note, programming this register to a value higher than the product has cores should not be done.

This register is reset only by PWRGOOD.

Type: CFG Bus: 1 Offset: 0xa4		Port ID: N/A Device: 10 Function: 1	
Bit	Attr	Default	Description
31:31	RWS_KL	0x0	Lock(LOCK): Lock: once written to a '1', changes to this register cannot be done. Cleared only by a power-on reset
30:30	RWS_L	0x0	SMT Disable (SMT_DISABLE): Disable simultaneous multithreading in all cores if this bit is set to '1'.
15:0	RWS_L	0x0	Cores Off Mask (CORE_OFF_MASK): BIOS will set this bit to request that the matching core should not be activated coming out of reset. The default value of this registers means that all cores are enabled. Restrictions: At least one core needs to be left active. Otherwise, FW will ignore the setting altogether.

DID		VID		0h		80h	
PCISTS		PCICMD		4h		84h	
CCR			RID	8h		88h	
BIST	HDR	PLAT	CLSR	Ch		8Ch	
					10h	DRAM_POWER_INFO	90h
					14h		94h
					18h		98h
					1Ch		9Ch
					20h		DRAM_ENERGY_STATUS
					24h	A4h	



				28h	DRAM_ENERGY_STATUS_CH0	A8h
SDID		SVID		2Ch		ACh
				30h	DRAM_ENERGY_STATUS_CH1	B0h
				CAPPTR		34h
				38h	DRAM_ENERGY_STATUS_CH2	B8h
MAXLAT	MINGNT	INTPIN	INTL	3Ch		BCh
				40h	DRAM_ENERGY_STATUS_CH3	C0h
				44h		C4h
				48h		C8h
				4Ch		CCh
				50h		D0h
				54h		D4h
				58h	DRAM_RAPL_PERF_STATUS	D8h
				5Ch		DCh
				60h		E0h
				64h		E4h
				68h		E8h
				6Ch		ECh
				70h	MCA_ERR_SRC_LOG	F0h
				74h		F4h
				78h	THERMTRIP_CONFIG	F8h
PKG_CST_ENTRY_CRITERIA_MASK				7Ch		FCh

7.1.12 PACKAGE_RAPL_PERF_STATUS

This register is used by PCODE to report Package Power limit violations in the Platform PBM.

THIS REGISTER IS DUPLICATED IN THE PCU IO SPACE, CHANGES MUST BE MADE IN BOTH PLACES.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x88		Function: 2	
Bit	Attr	Default	Description
31:0	RO_V	0x0	Power Limit Throttle Counter (PWR_LIMIT_THROTTLE_CTR): Reports the number of times the Power limiting algorithm had to clip the power limit due to hitting the lowest power state available. Accumulated PACKAGE throttled time



7.1.13 DRAM_POWER_INFO

Defines allowed DRAM power and timing parameters.

PCODE will update the contents of this register.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x90		Function: 2	
Bit	Attr	Default	Description
63:63	RW_KL	0x0	Lock: Lock bit to lock the Register
54:48	RW_L	0x28	Maximal Time Window (DRAM_MAX_WIN): The maximal time window allowed for the DRAM. Higher values will be clamped to this value. x = PKG_MAX_WIN[54:53] y = PKG_MAX_WIN[52:48] The timing interval window is Floating Point number given by $1.x * \text{power}(2,y)$. The unit of measurement is defined in DRAM_POWER_INFO_UNIT_MSR[TIME_UNIT].
46:32	RW_L	0x258	Maximal Package Power (DRAM_MAX_PWR): The maximal power setting allowed for DRAM. Higher values will be clamped to this value. The maximum setting is typical (not guaranteed). The units for this value are defined in DRAM_POWER_INFO_UNIT_MSR[PWR_UNIT].
30:16	RW_L	0x78	Minimal DRAM Power (DRAM_MIN_PWR): The minimal power setting allowed for DRAM. Lower values will be clamped to this value. The minimum setting is typical (not guaranteed). The units for this value are defined in DRAM_POWER_INFO_UNIT_MSR[PWR_UNIT].
14:0	RW_L	0x118	Spec DRAM Power (DRAM_TDP): The Spec power allowed for DRAM. The TDP setting is typical (not guaranteed). The units for this value are defined in DRAM_POWER_INFO_UNIT_MSR[PWR_UNIT].

7.1.14 DRAM_ENERGY_STATUS

DRAM energy consumed by all the DIMMS in all the Channels. The counter will wrap around and continue counting when it reaches its limit.

The energy status is reported in units which are defined in DRAM_POWER_INFO_UNIT_MSR[ENERGY_UNIT].

The data is updated by PCODE and is Read Only for all SW.

THIS REGISTER IS DUPLICATED IN THE PCU IO SPACE, CHANGES MUST BE MADE IN BOTH PLACES.



Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0xa0		Function: 2	
Bit	Attr	Default	Description
31:0	RO_V	0x0	Energy Value(DATA): Energy Value

7.1.15 DRAM_ENERGY_STATUS_CH[0:3]

DRAM energy consumed by all the DIMMS in ChannelX (X = 0, 1, 2, 3). The counter will wrap around and continue counting when it reaches its limit.

The data is updated by PCODE and is Read Only for all SW.

THIS REGISTER IS DUPLICATED IN THE PCU IO SPACE, CHANGES MUST BE MADE IN BOTH PLACES.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0xa8, 0xb0, 0xb8, 0xc0		Function: 2	
Bit	Attr	Default	Description
31:0	RO_V	0x0	Energy Value(DATA): Energy Value

7.1.16 DRAM_RAPL_PERF_STATUS

This register is used by PCODE to report DRAM Plane Power limit violations in the Platform PBM.

Dual mapped as PCU IOREG

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0xd8		Function: 2	
Bit	Attr	Default	Description
31:0	RO_V	0x0	Power Limit Throttle Counter (PWR_LIMIT_THROTTLE_CTR): Reports the number of times the Power limiting algorithm had to clip the power limit due to hitting the lowest power state available. Accumulated DRAM throttled time



7.1.17 MCA_ERR_SRC_LOG

MCA Error Source Log.

MCSrcLog is used by the PCU to log the error sources. This register is initialized to zeroes during reset. The PCU will set the relevant bits when the condition they represent appears. The PCU never clears the registers-the UBox or off-die entities should clear them when they are consumed, unless their processing involves taking down the platform.

THIS REGISTER IS DUPLICATED IN THE PCU IO SPACE, CHANGES MUST BE MADE IN BOTH PLACES.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0xec		Function: 2	
Bit	Attr	Default	Description
31:31	RWS_V	0x0	CATERR: External error: The package asserted CATERR# for any reason. It is orbit 30, bit29; functions as a Valid bit for the other two package conditions. It has no effect when a local core is associated with the error.
30:30	RWS_V	0x0	IERR: External error: The package asserted IERR.
29:29	RWS_V	0x0	MCERR: External error: The package asserted MCERR.
15:0	RWS_V	0x0	Core Mask (CORE_MASK): Bit i is on if core i asserted an error.

7.1.18 THERMTRIP_CONFIG

This register is used to configure whether the Thermtrip signal only carries the processor Trip information, or does it carry the Mem trip information as well. The register will be used by HW to enable ORing of the memtrip info into the thermtrip OR tree.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0xf8		Function: 2	
Bit	Attr	Default	Description
3:1	RO	0x0	Reserved: Reserved for Thermal configuration - should be implemented in HW
0:0	RW	0x0	Enable MEM Trip(EN_MEMTRIP): If set to 1, PCU will OR in the MEMtrip information into the ThermTrip OR Tree If set to 0, PCU will ignore the MEMtrip information and ThermTrip will just have the processor indication. Expect BIOS to Enable this in Phase4



Power Controller Unit (PCU) Register

DID		VID		0h	CAP_HDR	80h	
PCISTS		PCICMD		4h	CAPID0	84h	
CCR			RID	8h	CAPID1	88h	
BIST	HDR	PLAT	CLSR	Ch	CAPID2	8Ch	
				10h	CAPID3	90h	
				14h	CAPID4	94h	
				18h		98h	
				1Ch		9Ch	
				20h		A0h	
				24h		A4h	
				28h		A8h	
SDID		SVID		2Ch		ACh	
				30h	RESOLVED_CORES_MASK	B0h	
				CAPPTR		34h	
				38h	B8h		
MAXLAT	MINGNT	INTPIN	INTL	3Ch		BCh	
				40h	C0h		
				44h	C4h		
				48h	C8h		
				4Ch	CCh		
				50h	D0h		
				54h	D4h		
				58h	D8h		
				5Ch	DCh		
				60h	E0h		
				64h	E4h		
68h	E8h						
6Ch	ECh						
70h	FOh						
74h							
78h		F8h					
7Ch		FCh					



7.1.19 CAP_HDR

This register is a Capability Header. It enumerates the CAPID registers available, and points to the next CAP_PTR.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x80		Function: 3	
Bit	Attr	Default	Description
27:24	RO_FW	0x1	CAPID_Version: This field has the value 0001b to identify the first revision of the CAPID register definition.
23:16	RO_FW	0x18	CAPID_Length: This field indicates the structure length including the header in Bytes.
15:8	RO_FW	0x0	Next_Cap_Ptr: This field is hardwired to 00h indicating the end of the capabilities linked list.
7:0	RO_FW	0x9	CAP_ID: This field has the value 1001b to identify the CAPID assigned by the PCI SIG for vendor dependent capability pointers.

7.1.20 CAPIDO

This register is a Capability Register used to expose enabledisable for BIOS use.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x84		Function: 3	
Bit	Attr	Default	Description
31:31	RO_FW	0x0	PCLMULQ_DIS: Disable PCLMULQ instructions
30:30	RO_FW	0x0	DCU_MODE: DCU mode 0: normal 1: 16K 1/2 size ECC mode
29:29	RO_FW	0x0	PECI_EN: Enable Peci to the Processor
28:28	RO_FW	0x0	ART_DIS: SparDisable support for Always Running APIC Timer. Disable the ART (Always Running APIC Timer) function in the APIC (enable legacy timer)
27:27	RO_FW	0x0	SLC64_DIS: Disable Segment-Limit Checking 64-Bit Mode - Segment limit checks also in long mode (currently only supported in compatibility mode)



Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x84		Function: 3	
Bit	Attr	Default	Description
26:26	RO_FW	0x0	GSSE256_DIS: Disable all GSSE instructions and Disables setting GSSE XFeatureEnabledMask[GSSE] bit.
25:25	RO_FW	0x0	XSAVEOPT_DIS: Disable XSAVEOPT.
24:24	RO_FW	0x0	XSAVE_DIS: Disable the following instructions: XSAVE, XSAVEOPT, XRSTOR, XSETBV and XGETBV.
23:23	RO_FW	0x0	AES_DIS: Disable AES
22:22	RO_FW	0x0	TSC_DEADLINE_DIS: APIC timer last tick relative mode: Disable support for TSC Deadline
21:21	RO_FW	0x0	LT_SMM_INHIBIT: Intel TXT for handling of SMI inhibit with opt-out SMM
20:20	RO_FW	0x0	LT_SX_EN: Intel TXT and FIT-boot Enable
19:19	RO_FW	0x0	LT_PRODUCTION: Intel TXT Production 1. Intel TXT-enable == SMX enable 2. LTSX enable == FIT boot enable 3. Intel TXT production Legal combination (assume 0/1 == disable/enable) SMX(LT) enable FIT boot enable Intel TXT Production Remark 0 0 0 Intel TXT is disabled 1 1 1 Intel TXT/LTSX enabled (production) 1 1 0 Intel TXT/LTSX enabled (non production) 1 0 1 Intel TXT enabled (no LTSX)-single package (production) 1 0 0 Intel TXT enabled (no LTSX)-single package (non production)
18:18	RO_FW	0x0	SMX_DIS: Disable SMX
17:17	RO_FW	0x0	VMX_DIS: Disable VMX
16:16	RO_FW	0x0	CORECONF_RES12: Core configuration reserved bit 12
15:15	RO_FW	0x0	VT_X3_EN: Enable VT-x3



Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x84		Function: 3	
Bit	Attr	Default	Description
14:14	RO_FW	0x0	VT_REAL_MODE: VT Real mode
13:13	RO_FW	0x0	VT_CPAUSE_EN: Enable CPAUSE - conditional PAUSE loop exiting; New VMX control to allow exit on PAUSE loop that are longer than a specified Window
12:12	RO_FW	0x0	HT_DIS: Disable Multi threading
11:9	RO_FW	0x0	LLC_WAY_EN: Enable LLC ways value Cache size '000: 0.5 M (4 lower ways) '001: 1 M (8 lower ways) '010: 1.5 M (12 lower ways) '011: 2 M (16 lower ways) '100: 2.5M (20 lower ways)
8:8	RO_FW	0x0	PRG_TDP_LIM_EN: Allows usage of TURBO_POWER_LIMIT MSRs
7:5	RO_FW	0x0	CACHESZ: Minimal LLC sizeways. Can be upgraded through SSKU up to LLC_WAYS_EN. value LLC Size per slice (Enabled ways per slice) '000: 0.5 M (4 lower ways) '001: 1 M (8 lower ways) '010: 1.5 M (12 lower ways) '011: 2 M (16 lower ways) '100: 2.5M (20 lower ways)
4:4	RO_FW	0x0	DE_SKTR1_EX: Socket R1, EX
3:3	RO_FW	0x0	DE_SKTR_EP4S: SKU configuration indication to BIOS. Definition depends upon DESKTR1EX bit Intel Xeon processor E5 product family-based platform: SKT R, EP2S SKU
2:2	RO_FW	0x0	DE_SKTR_EP2S: SKU configuration indication to BIOS. Definition depends upon DESKTR1EX bit Intel Xeon processor E5 product family-based platform: SKT R, EP2S SKU
1:1	RO_FW	0x0	DE_SKTB2_EN: SKU configuration indication to BIOS. Definition depends upon DESKTR1EX bit Intel Xeon processor E5 product family-based platform: B2 Package, EN 2S SKU



Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x84		Function: 3	
Bit	Attr	Default	Description
0:0	RO_FW	0x0	DE_SKTB2_UP: SKU configuration indication to BIOS. Definition depends upon DE_SKTR1_EX bit Intel Xeon Processor E5 product family-based platform: Indicates that device is a UP SKU, independent of package

7.1.21 CAPID1

This register is a Capability Register used to expose enabledisable BIOS use.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x88		Function: 3	
Bit	Attr	Default	Description
31:31	RO_FW	0x0	DIS_MEM_MIRROR: Disable memory channel mirroring mode. In the mirroring mode, the server maintains two identical copies of all data in memory. The contents of branch 0 (containing channel 0/1) is duplicated in the DIMMs of branch 1 (containing channel 2/3). In the event of an uncorrectable error in one of the copies, the system can retrieve the mirrored copy of the data. The use of memory mirroring means that only half of the installed memory is available to the operating system.
30:30	RO_FW	0x0	DIS_MEM_LT_SUPPORT: Disable Intel TXT support
29:26	RO_FW	0x0	DMFC: This field controls which values may be written to the Memory Frequency Select field 6:4 of the Clocking Configuration registers (MCHBAR Offset C00h). Any attempt to write an unsupported value will be ignored. [3:3] - If set, over-clocking is supported and bits 2:0 are ignored. [2:0] - Maximum allowed memory frequency. 3b111 - up to DDR-1066 (4 x 266) 3b110 - up to DDR-1333 (5 x 266) 3b101 - up to DDR-1600 (6 x 266) 3b100 - up to DDR-1866 (7 x 266) 3b011 - up to DDR-2133 (8 x 266) -- reserved, not supported 3b010 - up to DDR-2400 (9 x 266) -- reserved, not supported 3b001 - up to DDR-2666 (10 x 266) -- reserved, not supported 3b000 - up to DDR-2933 (11 x 266) -- reserved, not supported




Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x88		Function: 3	
Bit	Attr	Default	Description
25:23	RO_FW	0x0	MEM_PA_SIZE: Physical address size supported in the core low two bits (Assuming uncore is 44 by default) 000: 46 010: 44 101: 36 110: 40 111: 39 reserved High order bit was the "do fault" bit it is not currently hooked up MUST MATCH UNCORE MISC, IFF exists
22:17	RO_FW	0x0	SSKU_P0_RATIO:
16:11	RO_FW	0x0	SSKU_P1_RATIO:
10:10	RO_FW	0x0	rsvd
9:9	RO_FW	0x0	QOS_DIS: Disable Quality of Service
8:8	RO_FW	0x0	rsvd
7:7	RO_FW	0x0	X2APIC_EN: Enable Extended APIC support. When set the enables the support of x2APIC (Extended APIC) in the core and unCore. The being set will impact : a. CPUID indication x2APIC support b. CPU ability to enable x2APIC support c. unCore ability to generate and send x2APIC messages.
6:6	RO_FW	0x0	CPU_HOT_ADD_EN: Intel TXT - ENABLE CPU HOT ADD
5:5	RO_FW	0x0	PWRBITS_DIS: 0b Power features activated during reset 1b Power features (especially clock gating) are not activated
4:4	RO_FW	0x0	GV3_DIS: Disable GV3. Does not allow for the writing of the IA32_PERF_CONTROL register in order to change ratios
3:2	RO_FW	0x0	PPPE: PPPE_ENABLE
1:1	RO_FW	0x0	CORE_RAS_EN: Enable Data Poisoning, MCA recovery
0:0	RO_FW	0x0	DCA_EN: DCA Enable



7.1.22 CAPID2

This register is a Capability Register used to expose enabledisable for BIOS use.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x8c		Function: 3	
Bit	Attr	Default	Description
31:31	RO_FW	0x0	QPI_SPARE:
30:30	RO_FW	0x0	QPI_LINK2_DIS: When set QPI link 2 will be disabled.
29:25	RO_FW	0x0	QPI_ALLOWED_CFCLK_RATIO_DIS: Allowed CFCLK ratio is 12,11,10,9, 8(default),7; One bit is allocated for each supported ratio except 8, the default ratio. Intel QPI transfer rate = 8 * CFCLK. Bits are organized as r12_r11_r10_r9_r7 format. 0/1 --> ratio supported/not supported. Default ratio of 8 is always supported, hence can not be disabled. Ex: 00000 ==> Supported ratio: 12,11,10,9,8(default),7; ratio not supported: none 00001 ==> Supported ratio: 12,11,10,9,8(default); ratio not supported: 7 11111 ==> Supported ratio: 8(default); ratio not supported: 12,11,10,9,7
24:24	RO_FW	0x0	QPI_LINK1_DIS: When set Intel QPI link 1 will be disabled.
23:23	RO_FW	0x0	QPI_LINK0_DIS: When set Intel QPI link 0 will be disabled.
22:22	RO_FW	0x0	SPARE_SIGNED_FW: Spare fuses
21:20	RO_FW	0x0	(THERMAL_PROFILE): Spare fuses
19:19	RO_FW	0x0	PCIE_DISNTB: Disable NTB support
18:18	RO_FW	0x0	PCIE_DISROL: Disable Raid-on-load
17:17	RO_FW	0x0	PCIE_DISLTSX: Disable LTSX
16:16	RO_FW	0x0	PCIE_DISILT: Disable Intel TXT
15:15	RO_FW	0x0	PCIE_DISPCIEG3: Disable PCIe Gen 3
14:14	RO_FW	0x0	PCIE_DISDMA: Disable DMA engine and supporting functionality
13:13	RO_FW	0x0	PCIE_DISDMI: Disable DMI interface



Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x8c		Function: 3	
Bit	Attr	Default	Description
12:3	RO_FW	0x0	PCIE_DISXPDEV: Disable specific PCIe port (example: 2x20 (EP), 1x20(EN2), 2x20 (EN1) speed supported here)
2:1	RO_FW	0x0	PCIE_DISx16: Disable the PCIe x16 ports (limit to x8's only)
0:0	RO_FW	0x0	PCIE_DISWS: Disable WS features such as graphics cards in PCIe 2.0 slots


7.1.23 CAPID3

This register is a Capability Register used to expose enable/disable features for BIOS.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x90		Function: 3	
Bit	Attr	Default	Description
31:30	RO_FW	0x0	MC_SPARE:
29:24	RO_FW	0x0	MC2GD: MC2GD Bit[5:4]: Tx Pulse Width Control Bit[1:0]. 00 = Short, 01 = Medium, 10 = Long, 11 = Reserved MC2GDBit3: DLL VRM: Increase Resistance in the VRM Feedback loop MC2GDBit2: DLL VRM: Increase Amp Current in the VRM Feedback loop MC2GDBit1: DLL Startup Time setting. 1 = 16cycles, 0 = 32cycles MC2GDBit0: 1.35V DDR3L LVDDR disable
23:23	RO_FW	0x0	DISABLE_MONROE_TECHNOLOGY(DISABLE_MONROE): Intel® Dynamic Power Technology Disable download. When set, the MONROE_CHN_FORCE_SR register field in MCMTR and the channel MCMTR_SHDW becomes read-only.
22:22	RO_FW	0x0	DISABLE_SMBUS_WRT: dSMBUS write capability disable control. When set, SMBus write is disabled.
21:21	RO_FW	0x0	DISABLE_ROL_OR_ADR: RAID-On-LOAD disable control. When set, memory ignores ADR event. Download may change the default value after reset de-assertion.
20:20	RO_FW	0x0	DISABLE_EXTENDED_ADDR_DIMM: Extended addressing DIMM disable control. When set, DIMM with extended addressing (MA[17/16] is forced to be zero when driving MA[17:16]).
19:19	RO_FW	0x0	DISABLE_EXTENDED_LATENCY_DIMM: Extended latency DIMM disable control. When set, DIMM with extended latency is forced to CAS to be less than or equal to 14.



Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x90		Function: 3	
Bit	Attr	Default	Description
18:18	RO_FW	0x0	DISABLE_PATROL_SCRUB: Patrol scrub disable control. When set, rank patrol scrub is disabled.
17:17	RO_FW	0x0	DISABLE_SPARING: Sparing disable control. When set, rank sparing is disabled.
16:16	RO_FW	0x0	DISABLE_LOCKSTEP: LOCKSTEP disable control. When set, channel lockstep operation is disabled by forcing independent channel mode.
15:15	RO_FW	0x0	DISABLE_CLTT: CLTT disable control. When set, CLTT support is disabled by disabling TSOD polling.
14:14	RO_FW	0x0	DISABLE_UDIMM: UDIMM disable control. When set, UDIMM support is disabled by disabling address bit swizzling.
13:13	RO_FW	0x0	DISABLE_RDIMM: RDIMM disable control. When set, RDIMM support is disabled by disabling the RDIMM control word access. In addition, the upper 5 bits of the 13b_T_STAB register will be treated as zeros, that is, the T_STAB can only have max of 255 DCLK delay after clock-stopped power down mode which is in sufficient for normal RDIMM clock stabilization; hence, users will not be able to support self-refresh with clock off mode (S3, pkg C6) if the RDIMM disable is blown to one.
12:12	RO_FW	0x0	DISABLE_3N: 3N disable control. When set, 3N mode under normal/IOSAV operation (excluding MRS) is disabled
11:11	RO_FW	0x0	DISABLE_DIR: DIR disable control. When set, directory is disabled.
10:10	RO_FW	0x0	DISABLE_ECC: ECC disable control. When set, ECC is disabled.
9:9	RO_FW	0x0	DISABLE_OR_DIMM: OR DIMM disable control. When set, CS signals for OR-DIMM in slot 0-1 is disabled. Note: some CS may have multiplexed with address signal to support extended addressing. The CS signal disabling is only applicable to CS not the being multiplexed with address
8:8	RO_FW	0x0	DISABLE_4GBIT_DDR3: 4 GB disable control. When set, the address decode to the corresponding 4 Gb mapping is disabled. Note: LR-DIMM's logical device density is also limited to 4 Gb when this is set.
7:7	RO_FW	0x0	DISABLE_8GBIT_DDR3: 8 Gb or higher disable control. When set, the address decode to the corresponding 8 Gb or higher mapping is disabled. Note: LR-DIMM's logical device density is also limited to 8 Gb when this is set.



Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x90		Function: 3	
Bit	Attr	Default	Description
5:5	RO_FW	0x0	DISABLE_3_DPC: 3 DPC disable control. When set, CS signals for DIMM slot 2 are disabled. Note: some CS may have multiplexed with address signal to support extended addressing. The CS signal disabling is only applicable to CS not the being multiplexed with address.
4:4	RO_FW	0x0	DISABLE_2_DPC: 2 DPC disable control. When set, CS signals for DIMM slot 1-2 (i.e. slots 0 is not disabled) are disabled. Note: some CS may have multiplexed with address signal to support extended addressing. The CS signal disabling is only applicable to CS not the being multiplexed with address
3:0	RO_FW	0x0	CHN_DISABLE: Channel disable control. When set, the corresponding channel is disabled.

7.1.24 CAPID4

This register is a Capability Register used to expose enable/disable for BIOS use.

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0x94		Function: 3	
Bit	Attr	Default	Description
31:31	RO_FW	0x0	Disable DRAM Power Meter (DRAM_POWER_METER_DISABLE)
30:30	RO_FW	0x0	Disable DRAM RAPL(DRAM_RAPL_DISABLE)
29:29	RO_FW	0x0	Enable Intelligent Turbo (I_TURBO_ENABLE)
28:28	RO_FW	0x0	Reserved (RSVD)
27:27	RO_FW	0x0	TSC_RST_S3EXIT_EN:
26:19	RO_FW	0x0	SPARE_FUSES:
18:15	RO_FW	0x0	RSVD
14:0	RO_FW	0x0	LLC_SLICE_IA_CORE_EN This field reflects inverted value of the LLC_SLICE_IA_CORE_DIS Fuse



7.1.25 RESOLVED_CORES_MASK

Type: CFG		Port ID: N/A	
Bus: 1		Device: 10	
Offset: 0xb0		Function: 3	
Bit	Attr	Default	Description
24:24	RO_V	0x0	<p>SMT Capability:</p> <p>Enabled threads in the package.</p> <p>0b 1 thread 1b 2 threads</p>
23:16	RO_V	0x0	<p>enabled Core Mask:</p> <p>Vector of enabled IA cores in the package.</p>
9:8	RO_V	0x0	<p>Thread Mask (THREAD_MASK):</p> <p>Thread Mask indicates which threads are enabled in the core. The LSB is the enable bit for Thread 0, whereas the MSB is the enable bit for Thread 1.</p> <p>This field is determined by FW based on CSR_DESIRED_CORES[SMT_DISABLE] and PCU_CR_RESOLVED_CORES_MASK[FUSED_THREAD_MASK].</p>
7:0	RO_V	0x0	<p>Core Mask (CORE_MASK):</p> <p>The resolved IA core mask contains the functional and non-defeatured IA cores.</p> <p>The mask is indexed by logical ID. It is normally contiguous, unless BIOS defeature is activated on a particular core.</p> <p>processor will read this mask in order to decide on BSP and APIC IDs.</p> <p>This field is determined by FW based on CSR_DESIRED_CORES[CORE_OFF_MASK] and PCU_CR_RESOLVED_CORES_MASK[FUSED_CORE_MASK].</p>

§



8 Integrated I/O (IIO) Configuration Registers

8.1 Registers Overview

8.1.1 Configuration Registers (CSR)

There are two distinct CSR register spaces supported by the IIO Module.

The first one is the traditional PCI-defined configuration registers. These registers are accessed via the well known configuration transaction mechanism defined in the PCI specification and this uses the bus:device:function number concept to address a specific device's configuration space. Accesses to PCI configuration registers is achieved via NcCfgRd/Wr transactions on Intel QPI.

The second is via MMIO space for CB DMA, Intel VT-d, RCRB and I/OxAPIC runtime registers. These memory-mapped accesses use the NcWrPtl/NcRd/NcRdPtl transactions on Intel QPI.

8.1.2 BDF:BAR# for Various MMIO BARs in IIO

This is needed for any entity trying to access MMIO registers in the IIO module over message channel.

Table 8-1. BDF:BAR# for Various MMIO BARs in IIO

BAR Name	B	D	F	BAR#
DMIRCBAR	DC	0	0	0
CB-BAR0	DC	4	0	0
CB-BAR1	DC	4	1	0
CB-BAR2	DC	4	2	0
CB-BAR3	DC	4	3	0
CB-BAR4	DC	4	4	0
CB-BAR5	DC	4	5	0
CB-BAR6	DC	4	6	0
CB-BAR7	DC	4	7	0
VT-d VTBAR	DC	5	0	0
I/OxAPIC-MBAR	DC	5	4	0
I/OxAPIC-ABAR	DC	5	4	1

8.1.3 Unimplemented Devices/Functions and Registers

If the IIO module receives a configuration access over message channel or directly via the JTAG mini-port, to a device/function or BAR# that does not exist in the IIO module, the IIO module will abort these accesses. Software should not attempt or rely on reads or writes to unimplemented registers or register bits.



8.1.4 PCI Vs. PCIe Device / Function

PCI devices/functions do NOT have a PCIe capability register set and do not decode offsets 100h and beyond. Accesses to 100h and beyond are master aborted by these devices. I/OxAPIC functions are PCI functions. All other functions in the IIO module are PCIe functions and these have a PCIe capability register set and also decode address offsets 100h and beyond.

8.2 Device 0 Function 0 DMI , Device 0 Function 0 PCIe, Device 1 Function 0-1, Device 2 Function 0-3 PCIe, Device 3 Function 0-3 PCIe

Device 0 Function 0 PCIe Mode - Port 0 (X4)

Device 1 - Port 1 (X8)

Device 2 - Port 2 (X16)

Device 3 - Port 3 (X16)

Table 8-2. Function Number of Active Root Ports in Port 1 (Dev#1) based on Port Bifurcation

Port Bifurcation	Function# of Active Root Port	
	7:4	3:0
x8	0	
x4x4	1	0

Table 8-3. Function Number of Active Root Ports in Port 2 (Dev#2) based on Port Bifurcation

Port Bifurcation	Function# of Active Root Port			
	15:12	11:8	7:4	3:0
x16	0			
x8x8	2		0	
x8x4x4	2		1	0
x4x4x8	3	2	0	
x4x4x4x4	3	2	1	0

Table 8-4. Function Number of Active Root Ports in Port 3 (Dev#3) based on Port Bifurcation

Port Bifurcation	Function# of Active Root Port			
	15:12	11:8	7:4	3:0
x16	0			
x8x8	2		0	
x8x4x4	2		1	0
x4x4x8	3	2	0	
x4x4x4x4	3	2	1	0



Register Name	Offset	Size	Device 0 Function	Device 1 Function	Device 2 Function	Device 3 Function
vid	0x0	16	0	0-1	0 - 3	0 - 3
did	0x2	16	0	0-1	0 - 3	0 - 3
pcicmd	0x4	16	0	0-1	0 - 3	0 - 3
pcists	0x6	16	0	0-1	0 - 3	0 - 3
rid	0x8	8	0	0-1	0 - 3	0 - 3
ccr	0x9	24	0	0-1	0 - 3	0 - 3
clsr	0xc	8	0	0-1	0 - 3	0 - 3
plat	0xd	8	0	0-1	0 - 3	0 - 3
hdr	0xe	8	0	0-1	0 - 3	0 - 3
bist	0xf	8	0	0-1	0 - 3	0 - 3
pbus	0x18	8	0 (PCIe)	0-1	0 - 3	0 - 3
secbus	0x19	8	0 (PCIe)	0-1	0 - 3	0 - 3
subbus	0x1a	8	0 (PCIe)	0-1	0 - 3	0 - 3
iobas	0x1c	8	0 (PCIe)	0-1	0 - 3	0 - 3
iolim	0x1d	8	0 (PCIe)	0-1	0 - 3	0 - 3
secsts	0x1e	16	0 (PCIe)	0-1	0 - 3	0 - 3
mbas	0x20	16	0 (PCIe)	0-1	0 - 3	0 - 3
mlim	0x22	16	0 (PCIe)	0-1	0 - 3	0 - 3
pbas	0x24	16	0 (PCIe)	0-1	0 - 3	0 - 3
plim	0x26	16	0 (PCIe)	0-1	0 - 3	0 - 3
pbasu	0x28	32	0 (PCIe)	0-1	0 - 3	0 - 3
plimu	0x2c	32	0 (PCIe)	0-1	0 - 3	0 - 3
capptr	0x34	8	0	0-1	0 - 3	0 - 3
intl	0x3c	8	0	0-1	0 - 3	0 - 3
intpin	0x3d	8	0	0-1	0 - 3	0 - 3
bctrl	0x3e	16	0 (PCIe)	0-1	0 - 3	0 - 3
scapid	0x40	8	0 (PCIe)	0-1	0 - 3	0 - 3
snxtptr	0x41	8	0 (PCIe)	0-1	0 - 3	0 - 3
svid	0x2c	16	0 (DMI2)			
svid	0x44	16	0 (PCIe)	0-1	0 - 3	0 - 3
sdid	0x2e	16	0 (DMI2)			
sdid	0x46	16	0 (PCIe)	0-1	0 - 3	0 - 3
dmircbar	0x50	32	0			
msicapid	0x60	8	0	0-1	0 - 3	0 - 3
msinxtptr	0x61	8	0	0-1	0 - 3	0 - 3
msimgctl	0x62	16	0	0-1	0 - 3	0 - 3
msgadr	0x64	32	0	0-1	0 - 3	0 - 3
msgdat	0x68	32	0	0-1	0 - 3	0 - 3
msimsk	0x6c	32	0	0-1	0 - 3	0 - 3
msipending	0x70	32	0	0-1	0 - 3	0 - 3
pxpcapid	0x90	8	0	0-1	0 - 3	0 - 3



Register Name	Offset	Size	Device 0 Function	Device 1 Function	Device 2 Function	Device 3 Function
pxpnxtptr	0x91	8	0	0-1	0 - 3	0 - 3
pxpcap	0x92	16	0	0-1	0 - 3	0 - 3
devcap	0x94	32	0	0-1	0 - 3	0 - 3
devctrl	0xf0	16	0 (DMI2)			
devctrl	0x98	16	0 (PCIe)	0-1	0 - 3	0 - 3
devsts	0xf2	16	0 (DMI2)			
devsts	0x9a	16	0 (PCIe)	0-1	0 - 3	0 - 3
lnkcap	0x9c	32	0	0-1	0 - 3	0 - 3
lnkcon	0x1b0	16	0 (DMI2)			
lnkcon	0xa0	16	0 (PCIe)	0-1	0 - 3	0 - 3
lnksts	0x1b2	16	0 (DMI2)			
lnksts	0xa2	16	0 (PCIe)	0-1	0 - 3	0 - 3
sltcap	0xa4	32	0 (PCIe)	0-1	0 - 3	0 - 3
sltcon	0xa8	16	0 (PCIe)	0-1	0 - 3	0 - 3
sltsts	0xaa	16	0 (PCIe)	0-1	0 - 3	0 - 3
rootcon	0xac	16	0	0-1	0 - 3	0 - 3
rootcap	0xae	16	0	0-1	0 - 3	0 - 3
rootsts	0xb0	32	0 (PCIe)	0-1	0 - 3	0 - 3
devcap2	0xb4	32	0	0-1	0 - 3	0 - 3
devctrl2	0xf8	16	0 (DMI2)			
devctrl2	0xb8	16	0 (PCIe)	0-1	0 - 3	0 - 3
lnkcap2	0xbc	32	0	0-1	0 - 3	0 - 3
lnkcon2	0x1c0	16	0 (DMI2)			
lnkcon2	0xc0	16	0 (PCIe)	0-1	0 - 3	0 - 3
lnksts2	0x1c2	16	0 (DMI2)			
lnksts2	0xc2	16	0 (PCIe)	0-1	0 - 3	0 - 3
pmcap	0xe0	32	0	0-1	0 - 3	0 - 3
pmcsr	0xe4	32	0	0-1	0 - 3	0 - 3
xpreut_hdr_ext	0x100	32	0	0-1	0 - 3	0 - 3
xpreut_hdr_cap	0x104	32	0	0-1	0 - 3	0 - 3
xpreut_hdr_lef	0x108	32	0	0-1	0 - 3	0 - 3
acscaphdr	0x110	32	0 (PCIe)	0-1	0 - 3	0 - 3
acscap	0x114	16	0 (PCIe)	0-1	0 - 3	0 - 3
acsctrl	0x116	16	0 (PCIe)	0-1	0 - 3	0 - 3
apibase	0x140	16	0	0-1	0 - 3	0 - 3
apiclimit	0x142	16	0	0-1	0 - 3	0 - 3
vsecphdr	0x144	32	0 (DMI2)			
vshdr	0x148	32	0 (DMI2)			
errcaphdr	0x148	32	0 (PCIe)	0-1	0 - 3	0 - 3
uncerrsts	0x14c	32	0	0-1	0 - 3	0 - 3
uncerrmsk	0x150	32	0	0-1	0 - 3	0 - 3
uncerrsev	0x154	32	0	0-1	0 - 3	0 - 3



Register Name	Offset	Size	Device 0 Function	Device 1 Function	Device 2 Function	Device 3 Function
corerrsts	0x158	32	0	0-1	0 - 3	0 - 3
corerrmsk	0x15c	32	0	0-1	0 - 3	0 - 3
errcap	0x160	32	0	0-1	0 - 3	0 - 3
hdrlog0	0x164	32	0	0-1	0 - 3	0 - 3
hdrlog1	0x168	32	0	0-1	0 - 3	0 - 3
hdrlog2	0x16c	32	0	0-1	0 - 3	0 - 3
hdrlog3	0x170	32	0	0-1	0 - 3	0 - 3
rperrcmd	0x174	32	0	0-1	0 - 3	0 - 3
rperrsts	0x178	32	0	0-1	0 - 3	0 - 3
errsid	0x17c	32	0	0-1	0 - 3	0 - 3
perfctrlsts_0	0x180	32	0	0-1	0 - 3	0 - 3
perfctrlsts_1	0x184	32	0	0-1	0 - 3	0 - 3
miscctrlsts_0	0x188	32	0	0-1	0 - 3	0 - 3
miscctrlsts_1	0x18c	32	0	0-1	0 - 3	0 - 3
pcie_iou_bif_ctrl	0x190	16	0		0	0
dmictrl	0x1a0	64	0 (DMI2)			
dmists	0x1a8	32	0 (DMI2)			
ERRINJCAP	0x1d0	32	0	0-1	0 - 3	0 - 3
ERRINJHDR	0x1d4	32	0	0-1	0 - 3	0 - 3
ERRINJCON	0x1d8	16	0	0-1	0 - 3	0 - 3
ctoctrl	0x1e0	32	0	0-1	0 - 3	0 - 3
xpcorerrsts	0x200	32	0	0-1	0 - 3	0 - 3
xpcorerrmsk	0x204	32	0	0-1	0 - 3	0 - 3
xpuncerrsts	0x208	32	0	0-1	0 - 3	0 - 3
xpuncerrmsk	0x20c	32	0	0-1	0 - 3	0 - 3
xpuncerrsev	0x210	32	0	0-1	0 - 3	0 - 3
xpuncerrptr	0x214	8	0	0-1	0 - 3	0 - 3
uncedmask	0x218	32	0	0-1	0 - 3	0 - 3
coredmask	0x21c	32	0	0-1	0 - 3	0 - 3
rpedmask	0x220	32	0	0-1	0 - 3	0 - 3
xpuncedmask	0x224	32	0	0-1	0 - 3	0 - 3
xpcoredmask	0x228	32	0	0-1	0 - 3	0 - 3
xpglberrsts	0x230	16	0	0-1	0 - 3	0 - 3
xpglberrptr	0x232	16	0	0-1	0 - 3	0 - 3
pxp2cap	0x250	32		0-1	0 - 3	0 - 3
Inkcon3	0x254	32		0-1	0 - 3	0 - 3
Inerrsts	0x258	32		0-1	0 - 3	0 - 3
In0eq	0x25c	16		0-1	0 - 3	0 - 3
In1eq	0x25e	16		0-1	0 - 3	0 - 3
In2eq	0x260	16		0-1	0 - 3	0 - 3
In3eq	0x262	16		0-1	0 - 3	0 - 3
In4eq	0x264	16		0-1	0, 2	0, 2



Register Name	Offset	Size	Device 0 Function	Device 1 Function	Device 2 Function	Device 3 Function
In5eq	0x266	16		0-1	0, 2	0, 2
In6eq	0x268	16		0-1	0, 2	0, 2
In7eq	0x26a	16		0-1	0, 2	0, 2
In8eq	0x26c	16			0	0
In9eq	0x26e	16			0	0
In10eq	0x270	16			0	0
In11eq	0x272	16			0	0
In12eq	0x274	16			0	0
In13eq	0x276	16			0	0
In14eq	0x278	16			0	0
In15eq	0x27a	16			0	0
ler_cap	0x280	32	0	0-1	0 - 3	0 - 3
ler_hdr	0x284	32	0	0-1	0 - 3	0 - 3
ler_ctrlsts	0x288	32	0	0-1	0 - 3	0 - 3
ler_uncerrmsk	0x28c	32	0	0-1	0 - 3	0 - 3
ler_xpuncerrmsk	0x290	32	0	0-1	0 - 3	0 - 3
ler_rperrmsk	0x294	32	0	0-1	0 - 3	0 - 3
xppmdfxmat0	0x2f0	32	0	0	0	0
xppmdfxmat1	0x2f4	32	0	0	0	0
xppmdfxmsk0	0x2f8	32	0	0	0	0
xppmdfxmsk1	0x2fc	32	0	0	0	0
xppmdl0	0x480	32	0	0	0	0
xppmdl1	0x484	32	0	0	0	0
xppmcl0	0x488	32	0	0	0	0
xppmcl1	0x48c	32	0	0	0	0
xppmdh	0x490	16	0	0	0	0
xppmch	0x492	16	0	0	0	0
xppmr0	0x494	32	0	0	0	0
xppmr1	0x498	32	0	0	0	0
xppmevl0	0x49c	32	0	0	0	0
xppmevl1	0x4a0	32	0	0	0	0
xppmevh0	0x4a4	32	0	0	0	0
xppmevh1	0x4a8	32	0	0	0	0
xppmer0	0x4ac	32	0	0	0	0
xppmer1	0x4b0	32	0	0	0	0



8.2.1 vid

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x0				

Bit	Attr	Default	Description
15:0	RO	0x8086	vendor_identification_number: The value is assigned by PCI-SIG to Intel.

8.2.2 did

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x2				

Bit	Attr	Default	Description
15:0	RO RO_V (Device 0 and 3 Function 0)	For Device 0 Function 0: 0xe00 (DMI2 Mode) 0xe01 (PCIe Mode) For Device 2: 0xe04 (Function 0) 0xe05 (Function 1) 0xe06 (Function 2) 0xe07 (Function 3) For Device 3: 0xe08 (Function 0) 0xe09 (Function 1) 0xe0a (Function 2) 0xe0b (Function 3)	device_identification_number: Device ID values vary from function to function. Bits 15:8 are equal to 0x0E .



8.2.3 pcicmd

Type:	CFG	PortID:	N/A
Bus:	0	Device:	0
Bus:	0	Device:	1
Bus:	0	Device:	2
Bus:	0	Device:	3
Offset:	0x4	Function:	0
		Function:	0-1
		Function:	0-3
		Function:	0-3

Bit	Attr	Default	Description
10:10	RW	0x0	<p>interrupt_disable:</p> <p>Interrupt Disable. Controls the ability of the PCI Express port to generate INTx messages. This bit does not affect the ability of the processor to route interrupt messages received at the PCI Express port. However, this bit controls the generation of legacy interrupts to the DMI for PCI Express errors detected internally in this port (for example, Malformed TLP, CRC error, completion time out, and so forth) or when receiving RP error messages or interrupts due to HP/PM events generated in legacy mode within the processor.</p> <p>1: Legacy Interrupt mode is disabled 0: Legacy Interrupt mode is enabled</p>
9:9	RO	0x0	<p>fast_back_to_back_enable:</p> <p>Fast Back-to-Back Enable Not applicable to PCI Express must be hardwired to 0.</p>
8:8	RW	0x0	<p>serre:</p> <p>SERR Enable For PCI Express/DMI ports, this field enables notifying the internal core error logic of occurrence of an uncorrectable error (fatal or non-fatal) at the port. The internal core error logic of the IIO module then decides if/how to escalate the error further (pins/message, and so forth). This bit also controls the propagation of PCI Express ERR_FATAL and ERR_NONFATAL messages received from the port to the internal IIO core error logic.</p> <p>1: Fatal and Non-fatal error generation and Fatal and Non-fatal error message forwarding is enabled 0: Fatal and Non-fatal error generation and Fatal and Non-fatal error message forwarding is disabled Refer to PCI Express Base Specification, Revision 2.0 for details of how this bit is used in conjunction with other control bits in the Root Control register for forwarding errors detected on the PCI Express interface to the system core error logic.</p>
7:7	RO	0x0	<p>idsel_stepping_wait_cycle_control:</p> <p>IDSEL Stepping/Wait Cycle Control Not applicable to PCI Express must be hardwired to 0.</p>
6:6	RW	0x0	<p>perre:</p> <p>Parity Error Response For PCI Express/DMI ports, the IIO module ignores this bit and always does ECC/parity checking and signaling for data/address of transactions both to and from IIO. This bit though affects the setting of bit 8 in the PCISTS register.</p>
5:5	RO	0x0	<p>vga_palette_snoop_enable:</p> <p>Not applicable to PCI Express must be hardwired to 0.</p>
4:4	RO	0x0	<p>mwie:</p> <p>Not applicable to PCI Express must be hardwired to 0.</p>



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x6		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
13:13	RW1C	0x0	rma: Received Master Abort This bit is set when a root port experiences a master abort condition on a transaction it mastered on the primary interface (uncore internal bus). Note that certain errors might be detected right at the PCI Express interface and those transactions might not 'propagate' to the primary interface before the error is detected (for example, accesses to memory above TOCM in cases where the PCIe interface logic itself might have visibility into TOCM). Such errors do not cause this bit to be set, and are reported via the PCI Express interface error bits (secondary status register). Conditions that cause bit 13 to be set, include: Device receives a completion on the primary interface (internal bus of uncore) with Unsupported Request or master abort completion Status. This includes UR status received on the primary side of a PCI Express port on peer-to-peer completions also. Other master abort conditions detected on the IIO internal bus amongst those listed in the 'Inbound Address Decoding,' chapter of EDS Vol3.		
12:12	RW1C	0x0	rta: Received Target Abort This bit is set when a device experiences a completer abort condition on a transaction it mastered on the primary interface (uncore internal bus). Note that certain errors might be detected right at the PCI Express interface and those transactions might not 'propagate' to the primary interface before the error is detected (for example, accesses to memory above VTBAR). Such errors do not cause this bit to be set, and are reported via the PCI Express interface error bits (secondary status register). Conditions that cause bit 12 to be set, include: Device receives a completion on the primary interface (internal bus of uncore) with completer abort completion Status. This includes CA status received on the primary side of a PCI Express port on peer-to-peer completions also. Other completer abort conditions detected on the uncore internal bus amongst those listed in the, 'Inbound Address Decoding,' chapter of EDS Vol3.		
11:11	RW1C	0x0	sta: Signaled Target Abort This bit is set when a root port signals a completer abort completion status on the primary side (internal bus of uncore). This condition includes a PCI Express port forwarding a completer abort status received on a completion from the secondary.		
10:9	RO	0x0	devsel_timing: Not applicable to PCI Express. Hardwired to 0.		
8:8	RW1C	0x0	mdpe: Master Data Parity Error This bit is set by a root port if the Parity Error Response bit in the PCI Command register is set and it either receives a completion with poisoned data from the primary side or it forwards a packet with data (including MSI writes) to the primary side with poison.		
7:7	RO	0x0	fast_back_to_back: Not applicable to PCI Express. Hardwired to 0.		



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x6			
Bit	Attr	Default	Description
5:5	RO	0x0	pci66mhz_capable: Not applicable to PCI Express. Hardwired to 0.
4:4	RO	0x1	capabilities_list: Not applicable to PCI Express. Hardwired to 0.
3:3	RO_V	0x0	intx_status: This Read-only bit reflects the state of the interrupt in the PCI Express Root Port. Only when the Interrupt Disable bit in the command register is a 0 and this Interrupt Status bit is a 1, will this device generate INTx interrupt. Setting the Interrupt Disable bit to a 1 has no effect on the state of this bit. This bit does not get set for interrupts forwarded to the root port from downstream devices in the hierarchy. When MSI are enabled, Interrupt status should not be set.

8.2.5 rid

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x8			
Bit	Attr	Default	Description
7:0	RO_V	0x0	revision_id: Reflects the Uncore Revision ID after reset. Reflects the Compatibility Revision ID after BIOS writes 0x69 to any RID register in any Intel® Xeon® Processor E5 v2 product family function. Implementation Note: Read and write requests from the host to any RID register in any Intel® Xeon® Processor E5 v2 product family function are re-directed to the IIO cluster. Accesses to the CCR field are also redirected due to DWORD alignment. It is possible that JTAG accesses are direct, so will not always be redirected.



8.2.6 ccr

Type:	CFG	PortID:	N/A
Bus:	0	Device:	0
Bus:	0	Device:	1
Bus:	0	Device:	2
Bus:	0	Device:	3
Offset:	0x9	Function:	0
		Function:	0-1
		Function:	0-3
		Function:	0-3

Bit	Attr	Default	Description
23:16	RO_V	0x6	base_class: Generic Device
15:8	RO_V	0x4 0x80 (Device 3 Function 0 only)	sub_class: Generic Device
7:0	RO_V	0x0	interface: This field is hardwired to 00h for PCI Express port.

8.2.7 clsr

Type:	CFG	PortID:	N/A
Bus:	0	Device:	0
Bus:	0	Device:	1
Bus:	0	Device:	2
Bus:	0	Device:	3
Offset:	0xc	Function:	0
		Function:	0-1
		Function:	0-3
		Function:	0-3

Bit	Attr	Default	Description
7:0	RW	0x0	cacheline_size: This register is set as RW for compatibility reasons only. Cacheline size is always 64B. IIO hardware ignores this setting.

8.2.8 plat

Type:	CFG	PortID:	N/A
Bus:	0	Device:	0
Bus:	0	Device:	1
Bus:	0	Device:	2
Bus:	0	Device:	3
Offset:	0xd	Function:	0
		Function:	0-1
		Function:	0-3
		Function:	0-3

Bit	Attr	Default	Description
7:0	RO	0x0	primary_latency_timer: Not applicable to PCI Express. Hardwired to 00h.



8.2.9 hdr

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0xe				

Bit	Attr	Default	Description
7:7	RO_V RO (Device 0 Function 0)	0x1 0x0 (Device 0 Function 0)	<p>mfd: Multi-function Device This bit defaults to 0 for Device 0. This bit defaults to 1 for Devices 2-3. BIOS can individually control the value of this bit in Function 0 of these devices, based on HDRTPCTRL register. BIOS will write to that register to change this field to 0 in Function 0 of these devices, if it exposes only Function 0 in the device to OS. Note: In product SKUs where only Function 0 of the device is exposed to any software (BIOS/OS), BIOS would have to still set the control bits mentioned above to set the this bit in this register to be compliant per PCI rules.</p>
6:0	RO RO_V (Device 0 Function 0)	0x1 0x0 (Device 0 Function 0)	<p>cl: Configuration Layout This field identifies the format of the configuration header layout. In DMI mode, default is 00h indicating a conventional type 00h PCI header. In PCIe mode, the default is 01h, corresponding to Type 1 for a PCIe root port.</p>

8.2.10 bist

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0xf				

Bit	Attr	Default	Description
7:0	RO	0x0	<p>bist_tests: Not Supported. Hardwire to 00h.</p>



8.2.11 pbus

Primary Bus Number Register.

Type:	CFG	PortID:	N/A	Function:	0 (PCIe Mode)
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x18				

Bit	Attr	Default	Description
7:0	RW	0x0	<p>pbn:</p> <p>Configuration software programs this field with the number of the bus on the primary side of the bridge. This register has to be kept consistent with the Internal Bus Number 0 in the CPUBUSNO01 register. BIOS (and OS if internal bus number gets moved) must program this register to the correct value since IIO hardware would depend on this register for inbound configuration cycle decode purposes.</p>

8.2.12 secbus

Secondary Bus Number Register.

Type:	CFG	PortID:	N/A	Function:	0 (PCIe Mode)
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x19				

Bit	Attr	Default	Description
7:0	RW	0x0	<p>sbn:</p> <p>This field is programmed by configuration software to assign a bus number to the secondary bus of the virtual P2P bridge. IIO uses this register to either forward a configuration transaction as a Type 1 or Type 0 to PCI Express.</p>

8.2.13 subbus

Subordinate Bus Number Register.

Type:	CFG	PortID:	N/A	Function:	0 (PCIe Mode)
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x1a				

Bit	Attr	Default	Description
7:0	RW	0x0	<p>subordinate_bus_number:</p> <p>This register is programmed by configuration software with the number of the highest subordinate bus that is behind the PCI Express port. Any transaction that falls between the secondary and subordinate bus number (both inclusive) of an Express port is forwarded to the express port.</p>



8.2.14 iobas

I/O Base Register.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x1c		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
7:4	RW	0xf	i_o_base_address: Corresponds to A[15:12] of the IO base address of the PCI Express port. See also the IOLIM register description.		
3:2	RW_L	0x0	more_i_o_base_address: When EN1K is set in the IOMISCCTRL register, these bits become RW and allow for 1K granularity of I/O addressing, otherwise these are RO.		
1:0	RO	0x0	i_o_address_capability: IIO supports only 16 bit addressing		

8.2.15 iolim

I/O Limit Register.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x1d		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
7:4	RW	0x0	i_o_address_limit: Corresponds to A[15:12] of the I/O limit address of the PCI Express port. The I/O Base and I/O Limit registers define an address range that is used by the PCI Express port to determine when to forward I/O transactions from one interface to the other using the following formula: $IO_BASE \leq A[15:12] \leq IO_LIMIT$ The bottom of the defined I/O address range will be aligned to a 4KB boundary (1KB if EN1K bit is set. Refer to the IOMISCCTRL register for definition of EN1K bit) while the top of the region specified by IO_LIMIT will be one less than a 4 KB (1KB if EN1K bit is set) multiple. Notes: Setting the I/O limit less than I/O base disables the I/O range altogether. General the I/O base and limit registers won't be programmed by software without clearing the IOSE bit first.		
3:2	RW_L	0x0	more_i_o_address_limit: When EN1K is set in the IOMISCCTRL register, these bits become RW and allow for 1K granularity of I/O addressing, otherwise these are RO.		



Type:	CFG	PortID:	N/A	Function:	0 (PCIe Mode)
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x1d				

Bit	Attr	Default	Description
1:0	RO	0x0	i_o_address_limit_capability: IIO only supports 16 bit addressing

8.2.16 secsts

Secondary Status Register.

Type:	CFG	PortID:	N/A	Function:	0 (PCIe Mode)
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x1e				

Bit	Attr	Default	Description
15:15	RW1C	0x0	dpe: Detected Parity Error This bit is set by the root port whenever it receives a poisoned TLP in the PCI Express port. This bit is set regardless of the state the Parity Error Response Enable bit in the Bridge Control register.
14:14	RW1C	0x0	rse: Received System Error This bit is set by the root port when it receives a ERR_FATAL or ERR_NONFATAL message from PCI Express. Note this does not include the virtual ERR* messages that are internally generated from the root port when it detects an error on its own.
13:13	RW1C	0x0	rma: Received Master Abort Status This bit is set when the root port receives a Completion with 'Unsupported Request Completion' Status or when the root port master aborts a Type0 configuration packet that has a non-zero device number.
12:12	RW1C	0x0	rta: Received Target Abort Status This bit is set when the root port receives a Completion with 'Completer Abort' Status.
11:11	RW1C	0x0	sta: Signaled Target Abort This bit is set when the root port sends a completion packet with a 'Completer Abort' Status (including peer-to-peer completions that are forwarded from one port to another).
10:9	RO	0x0	devsel_timing: Not applicable to PCI Express. Hardwired to 0.



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x1e		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
8:8	RW1C	0x0	mdpe: Master Data Parity Error This bit is set by the root port on the secondary side (PCI Express link) if the Parity Error Response Enable bit (PERRE) is set in Bridge Control register and either of the following two conditions occurs: The PCI Express port receives a Completion from PCI Express marked poisoned. The PCI Express port poisons an outgoing packet with data. If the Parity Error Response Enable bit in Bridge Control Register is cleared, this bit is never set.		
7:7	RO	0x0	fast_back_to_back_transactions_capable: Not applicable to PCI Express. Hardwired to 0.		
5:5	RO	0x0	pci66_mhz_capability: Not applicable to PCI Express. Hardwired to 0.		

8.2.17 mbas

Memory Base.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x20		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
15:4	RW	0xffff	memory_base_address: Corresponds to A[31:20] of the 32 bit memory window's base address of the PCI Express port. See also the MLIM register description.		



8.2.18 mlim

Memory Limit Register.

Type:	CFG	PortID:	N/A	Function:	0 (PCIe Mode)
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x22				

Bit	Attr	Default	Description
15:4	RW	0x0	<p>memory_limit_address:</p> <p>Corresponds to A[31:20] of the 32 bit memory window's limit address that corresponds to the upper limit of the range of memory accesses that will be passed by the PCI Express bridge. The Memory Base and Memory Limit registers define a memory mapped IO non-prefetchable address range (32-bit addresses) and the IIO directs accesses in this range to the PCI Express port based on the following formula:</p> $\text{MEMORY_BASE} \leq \text{A}[31:20] \leq \text{MEMORY_LIMIT}$ <p>The upper 12 bits of both the Memory Base and Memory Limit registers are readwrite and corresponds to the upper 12 address bits, A[31:20] of 32-bit addresses. Thus, the bottom of the defined memory address range will be aligned to a 1 MB boundary and the top of the defined memory address range will be one less than a 1 MB boundary.</p> <p>Notes:</p> <p>Setting the memory limit less than memory base disables the 32-bit memory range altogether.</p> <p>Note that in general the memory base and limit registers won't be programmed by software without clearing the MSE bit first.</p>

8.2.19 pbas

Prefetchable Memory Base Register.

Type:	CFG	PortID:	N/A	Function:	0 (PCIe Mode)
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x24				

Bit	Attr	Default	Description
15:4	RW	0xffff	<p>prefetchable_memory_base_address:</p> <p>Corresponds to A[31:20] of the prefetchable memory address range's base address of the PCI Express port. See also the PLIMU register description.</p>
3:0	RO	0x1	<p>prefetchable_memory_base_address_capability:</p> <p>IIO sets this bit to 01h to indicate 64bit capability.</p>



8.2.20 plim

Prefetchable Memory Limit Register.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x26		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
15:4	RW	0x0	prefetchable_memory_limit_address: Corresponds to A[31:20] of the prefetchable memory address range's limit address of the PCI Express port. See also the PLIMU register description.		
3:0	RO	0x1	prefetchable_memory_limit_address_capability: IIO sets this field to 01h to indicate 64bit capability.		

8.2.21 pbasu

Prefetchable Memory Base Upper 32 bits.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x28		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
31:0	RW	0xffffffff	prefetchable_upper_32_bit_memory_base_address: Corresponds to A[63:32] of the prefetchable memory address range's base address of the PCI Express port. See also the PLIMU register description.		



8.2.22 plimu

Prefetchable Memory Limit Upper 32 bits.

Type:	CFG	PortID:	N/A	Function:	0 (PCIe Mode)
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x2c				

Bit	Attr	Default	Description
31:0	RW	0x0	<p>prefetchable_upper_32_bit_memory_limit_address: Corresponds to A[63:32] of the prefetchable memory address range's limit address of the PCI Express port. The Prefetchable Memory Base and Memory Limit registers define a memory mapped I/O prefetchable address range (64-bit addresses) which is used by the PCI Express bridge to determine when to forward memory transactions based on the following formula: $PREFETCH_MEMORY_BASE_UPPER :: PREFETCH_MEMORY_BASE \leq A[63:20] \leq PREFETCH_MEMORY_LIMIT_UPPER :: PREFETCH_MEMORY_LIMIT$ The upper 12 bits of both the Prefetchable Memory Base and Memory Limit registers are read/write and corresponds to the upper 12 address bits, A[31:20] of 32-bit addresses. The bottom of the defined memory address range will be aligned to a 1 MB boundary and the top of the defined memory address range will be one less than a 1 MB boundary. The bottom 4 bits of both the Prefetchable Memory Base and Prefetchable Memory Limit registers are read-only, contain the same value, and encode whether or not the bridge supports 64-bit addresses. If these four bits have the value 0h, then the bridge supports only 32 bit addresses. If these four bits have the value 1h, then the bridge supports 64-bit addresses and the Prefetchable Base Upper 32 Bits and Prefetchable Limit Upper 32 Bits registers hold the rest of the 64-bit prefetchable base and limit addresses respectively. Setting the prefetchable memory limit less than prefetchable memory base disables the 64-bit prefetchable memory range altogether. Notes: In general the memory base and limit registers won't be programmed by software without clearing the MSE bit first.</p>

8.2.23 capptr

Capability Pointer.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x34				

Bit	Attr	Default	Description
7:0	RO_V (Device 0 Function 0, Device 2 Function 0-3) RW_V (Device 3 Function 0) RO (Device 3 Function 1-3)	0x40 0x60 (Device 3 Function 0) 0x90 (Device 0 Function 0)	<p>capability_pointer: Points to the first capability structure for the device which is the PCIe capability.</p>

8.2.24 intl

Interrupt Line Register.



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x3c			

Bit	Attr	Default	Description
7:0	RW	0x0	interrupt_line:
	RO (Device 0 Function 0)		N/A for these devices

8.2.25 intpin

Interrupt Pin Register.

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x3d			

Bit	Attr	Default	Description
7:0	RW_O	0x1	intp:
			N/A since these devices do not generate any interrupt on their own

8.2.26 bctrl

Bridge Control Register.

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0 (PCIe Mode)
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x3e			

Bit	Attr	Default	Description
6:6	RW	0x0	sbr:
			<p>1: Setting this bit triggers a hot reset on the link for the corresponding PCI Express port and the PCI Express hierarchy domain subordinate to the port. This sends the LTSSM into the Training (or Link) Control Reset state, which necessarily implies a reset to the downstream device and all subordinate devices. The transaction layer corresponding to port will be emptied by virtue of the link going down when this bit is set. This means that in the outbound direction, all posted transactions are dropped and non-posted transactions are sent a UR response. In the inbound direction, completions for inbound NP requests are dropped when they arrive. Inbound posted writes are retired normally. Note also that a secondary bus reset will not reset the virtual PCI-to-PCI bridge configuration registers of the targeted PCI Express port.</p> <p>0: No reset happens on the PCI Express port.</p>



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	
		Function: 0 (PCIe Mode)	
Bus: 0		Device: 1	
Bus: 0		Device: 2	
Bus: 0		Device: 3	
Offset: 0x3e			
Bit	Attr	Default	Description
4:4	RW	0x0	<p>vga16b:</p> <p>This bit enables the virtual PCI-to-PCI bridge to provide 16-bit decoding of VGA I/O address precluding the decoding of alias addresses every 1 KB.</p> <p>0: execute 10-bit address decodes on VGA I/O accesses.</p> <p>1: execute 16-bit address decodes on VGA I/O accesses.</p> <p>Notes:</p> <p>This bit only has meaning if bit 3 of this register is also set to 1, enabling VGA IO decoding and forwarding by the bridge.</p> <p>Refer to PCI-PCI Bridge Specification Revision 1.2 for further details of this bit behavior.</p>
3:3	RW	0x0	<p>vgaen:</p> <p>Controls the routing of CPU initiated transactions targeting VGA compatible IO and memory address ranges. This bit must only be set for one p2p port in the entire system.</p>
2:2	RW	0x0	<p>isaen:</p> <p>Modifies the response by the root port to an I/O access issued by the core that target ISA I/O addresses. This applies only to I/O addresses that are enabled by the IOBASE and IOLIM registers.</p> <p>1: The root port will not forward to PCI Express any IO transactions addressing the last 768 bytes in each 1KB block even if the addresses are within the range defined by the IOBASE and IOLIM registers.</p> <p>0: All addresses defined by the IOBASE and IOLIM for core issued IO transactions will be mapped to PCI Express.</p>
1:1	RW	0x0	<p>serre:</p> <p>SERR Response Enable</p> <p>This bit controls forwarding of ERR_COR, ERR_NONFATAL and ERR_FATAL messages from the PCI Express port to the primary side.</p> <p>1: Enables forwarding of ERR_COR, ERR_NONFATAL and ERR_FATAL messages.</p> <p>0: Disables forwarding of ERR_COR, ERR_NONFATAL and ERR_FATAL</p>
0:0	RW	0x0	<p>perre:</p> <p>Parity Error Response Enable</p> <p>This only effect this bit has is on the setting of bit 8 in the SECSTS register</p>

8.2.27 scapid

Subsystem Capability Identity.

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	
		Function: 0 (PCIe Mode)	
Bus: 0		Device: 1	
Bus: 0		Device: 2	
Bus: 0		Device: 3	
Offset: 0x40			
Bit	Attr	Default	Description
7:0	RO	0xd	<p>capability_id:</p> <p>Assigned by PCI-SIG for subsystem capability ID</p>
	RW_O (Device 0 Function 0)		



8.2.28 snxtptr

Subsystem ID Next Pointer.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x41		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
7:0	RO	0x60	next_ptr: This field is set to 60h for the next capability list MSI capability structure in the chain.		

8.2.29 svid

Subsystem Vendor ID.

Type: CFG Bus: 0 Offset: 0x2c		PortID: N/A Device: 0		Function: 0 (DMI2 Mode)	
Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x44		Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
15:0	RW_O	0x8086	subsystem_vendor_id: Assigned by PCI-SIG for the subsystem vendor.		

8.2.30 sdid

Subsystem Identity.

Type: CFG Bus: 0 Offset: 0x2e		PortID: N/A Device: 0		Function: 0 (DMI2 Mode)	
Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x46		Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
15:0	RW_O	0x0	subsystem_device_id: Assigned by the subsystem vendor to uniquely identify the subsystem.		



8.2.31 dmircbar

DMI Root Complex Register Block Base Address.

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	
Offset: 0x50		Function: 0	
Bit	Attr	Default	Description
31:12	RW_LB	0x0	<p>dmircbar:</p> <p>This field corresponds to bits 32 to 12 of the base address DMI Root Complex register space. BIOS will program this register resulting in a base address for a 4KB block of contiguous memory address space. This register ensures that a naturally aligned 4KB space is allocated within the first 64GB of addressable memory space. System Software uses this base address to program the DMI Root Complex register set.</p> <p>All the Bits in this register are locked in Intel TXT mode.</p> <p>Note that this register is kept around on Device#0 even if that port is operating as PCIe port, to provide flexibility of using the VCs in PCIe mode as well. Nobody is asking for this capability right now but maintaining that flexibility.</p>
0:0	RW_LB	0x0	<p>dmircbaren:</p> <p>0: DMIRCBAR is disabled and does not claim any memory 1: DMIRCBAR memory mapped accesses are claimed and decoded</p> <p>Notes: Accesses to registers pointed to by the DMIRCBAR, via message channel or JTAG mini-port are not gated by this enable bit i.e. accesses these registers are honored regardless of the setting of this bit.</p> <p>BIOS sets this bit only when it wishes to update the registers in the DMIRCBAR. It must clear this bit when it has finished changing values. This is required to ensure that the registers cannot be changed during an Intel TXT lock. This bit is protected by Intel TXT mode, but the registers in DMIRCBAR are not protected except by this bit.</p>

8.2.32 msicapid

MSI Capability ID.

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	
Bus: 0		Device: 1	
Bus: 0		Device: 2	
Bus: 0		Device: 3	
Offset: 0x60		Function: 0-3	
Bit	Attr	Default	Description
7:0	RO	0x5	<p>capability_id:</p> <p>Assigned by PCI-SIG for MSI root ports.</p>



8.2.33 msinxtptr

MSI Next Pointer.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x61		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
7:0	RW_O	0x90	next_ptr: This field is set to 90h for the next capability list PCI Express capability structure in the chain.		

8.2.34 msimsgctl

MSI Control.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x62		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
8:8	RO	0x1	pvmc: This bit indicates that PCI Express ports support MSI per-vector masking.		
7:7	RO	0x0	b64ac: This field is hardwired to 0h since the message addresses are only 32-bit addresses (for example, FEEx_xxxxh).		
6:4	RW	0x0	mme: Multiple Message Enable. Applicable only to PCI Express ports. Software writes to this field to indicate the number of allocated messages which is aligned to a power of two. When MSI is enabled, the software will allocate at least one message to the device. A value of 000 indicates 1 message. Any value greater than or equal to 001 indicates a message of 2. See MSIDR for discussion on how the interrupts are distributed amongst the various sources of interrupt based on the number of messages allocated by software for the PCI Express ports.		
3:1	RO	0x1	mmc: Multiple Message Capable. Intel® Xeon® Processor E5 v2 product family's Express ports support two messages for all their internal events.		



Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x62			
Bit	Attr	Default	Description	
0:0	RW	0x0	<p>msien:</p> <p>Software sets this bit to select INTx style interrupt or MSI interrupt for root port generated interrupts.</p> <p>0: INTx interrupt mechanism is used for root port interrupts, provided the override bits in MISCCTRLSTS allow it</p> <p>1: MSI interrupt mechanism is used for root port interrupts, provided the override bits in MISCCTRLSTS allow it</p> <p>Note there bits 4:2 and bit 2 MISCCTRLSTS can disable both MSI and INTx interrupt from being generated on root port interrupt events.</p>	

8.2.35 msgadr

The MSI Address Register (MSIAR) contains the system specific address information to route MSI interrupts from the root ports and is broken into its constituent fields.

Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x64			
Bit	Attr	Default	Description	
31:2	RW	0x0	<p>address_id:</p> <p>Refer to the Interrupt Chapter for details of how this field is interpreted by IIO hardware. The definition of this field depends on whether interrupt remapping is enabled or disabled.</p>	

8.2.36 msgdat

MSI Data Register.

Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x68			
Bit	Attr	Default	Description	
15:0	RW	0x0	<p>data:</p> <p>Refer to the Interrupt Chapter for details of how this field is interpreted by IIO hardware. The definition of this field depends on whether interrupt remapping is enabled or disabled.</p>	



8.2.37 msimsk

MSI Mask Bit.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x6c				
Bit	Attr	Default	Description		
1:0	RW	0x0	<p>mask_bits:</p> <p>Relevant only when MSI is enabled and used for interrupts generated by the root port. For each Mask bit that is set, the PCI Express port is prohibited from sending the associated message. When only one message is allocated to the root port by software, only mask bit 0 is relevant and used by hardware.</p>		

8.2.38 msipending

MSI Pending Bit.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x70				
Bit	Attr	Default	Description		
1:0	RO_V	0x0	<p>pending_bits:</p> <p>Relevant only when MSI is enabled and used for interrupts generated by the root port. When MSI is not enabled or used by the root port, this register always reads a value 0. For each Pending bit that is set, the PCI Express port has a pending associated message. When only one message is allocated to the root port by software, only pending bit 0 is set/cleared by hardware and pending bit 1 always reads 0.</p> <p>Hardware sets this bit whenever it has an interrupt pending to be sent. This bit remains set till either the interrupt is sent by hardware or the status bits associated with the interrupt condition are cleared by software.</p> <p>Refer to the RASPM chapters for details of how this bit is set and cleared.</p>		

8.2.39 pxpcapid

PCI Express Capability Identity.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x90				
Bit	Attr	Default	Description		
7:0	RO	0x10	<p>capability_id:</p> <p>Provides the PCI Express capability ID assigned by PCI-SIG.</p>		



8.2.40 pxpnxtptr

PCI Express Next Pointer.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x91				

Bit	Attr	Default	Description
7:0	RO	0xe0	next_ptr: This field is set to the PCI PM capability.

8.2.41 pxpcap

PCI Express Capabilities Register.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x92				

Bit	Attr	Default	Description
13:9	RO	0x0	interrupt_message_number: Applies to root ports. This field indicates the interrupt message number that is generated for PM/HP/BW-change events. When there are more than one MSI interrupt Number allocated for the root port MSI interrupts, this register field is required to contain the offset between the base Message Data and the MSI Message that is generated when there are PM/HP/BW-change interrupts. IIO assigns the first vector for PM/HP/BW-change events and so this field is set to 0.
8:8	RW_O	0x0	slot_implemented: Applies only to the root ports. 1: indicates that the PCI Express link associated with the port is connected to a slot. 0: indicates no slot is connected to this port. Notes: This register bit is of type 'write once' and is set by BIOS.
7:4	RO_V	0x4	device_port_type: This field identifies the type of device. It is set to 0x4 for all the Express ports.
3:0	RW_O	0x2	capability_version: This field identifies the version of the PCI Express capability structure, which is 2h as of now. This register field is left as RW-O to cover any unknowns with Gen3.



8.2.42 devcap

The PCI Express Device Capabilities register identifies device specific information for the device.

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x94			

Bit	Attr	Default	Description
27:26	RO	0x0	captured_slot_power_limit_scale: Does not apply to root ports or integrated devices.
25:18	RO	0x0	captured_slot_power_limit_value: Does not apply to root ports or integrated devices.
15:15	RO	0x1	role_based_error_reporting: IIO is 1.1 compliant and so supports this feature
14:14	RO	0x0	power_indicator_present_on_device: Does not apply to root ports or integrated devices.
13:13	RO	0x0	attention_indicator_present: Does not apply to root ports or integrated devices.
12:12	RO	0x0	attention_button_present: Does not apply to root ports or integrated devices.
11:9	RO	0x0	endpoint_l1_acceptable_latency: N/A
8:6	RO	0x0	endpoint_ios_acceptable_latency: N/A
5:5	RW_O	0x0 0x1 (Device 3 Function 0)	extended_tag_field_supported:
4:3	RO	0x0	phantom_functions_supported: IIO does not support phantom functions.
2:0	RO	0x1 0x0 (Device 0 Function 0)	max_payload_size_supported: Max payload is 128B on the DMI/PCIe port corresponding to Port 0.



8.2.43 devctrl

PCI Express Device Control.

Type: CFG Bus: 0 Offset: 0xf0		PortID: N/A Device: 0		Function: 0 (DMI 2 Mode)
Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x98		Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3
Bit	Attr	Default	Description	
14:12	RO	0x0	max_read_request_size: PCI Express/DMI ports in Processor do not generate requests greater than 64B and this field is RO.	
11:11	RO	0x0	enable_no_snoop: Not applicable to DMI or PCIe root ports since they never set the 'No Snoop' bit for transactions they originate (not forwarded from peer) to PCI Express/DMI. This bit has no impact on forwarding of NoSnoop attribute on peer requests.	
10:10	RO	0x0	auxiliary_power_management_enable: Not applicable to Processor	
9:9	RO	0x0	phantom_functions_enable: Not applicable to IIO since it never uses phantom functions as a requester.	
8:8	RW RO (Device 0 Function 0)	0x0	extended_tag_field_enable: N/A since IIO it never generates any requests on its own that uses tags 7:5. Note though that on peer to peer writes, IIO forwards the tag field along without modification and tag fields 7:5 could be set and that is not impacted by this bit.	
7:5	RW_LV RW (Device 0 Function 0)	0x0	max_payload_size: 000: 128B max payload size 001: 256B max payload size others: alias to 128B IIO can receive packets equal to the size set by this field. IIO generate read completions as large as the value set by this field. IIO generates memory writes of max 64B.	
4:4	RO	0x0	enable_relaxed_ordering: Not applicable to root/DMI ports since they never set relaxed ordering bit as a requester (this does not include tx forwarded from peer devices). This bit has no impact on forwarding of relaxed ordering attribute on peer requests.	
3:3	RW	0x0	unsupported_request_reporting_enable: This bit controls the reporting of unsupported requests that IIO itself detects on requests its receives from a PCI Express/DMI port. 0: Reporting of unsupported requests is disabled 1: Reporting of unsupported requests is enabled.	



Type: CFG Bus: 0 Offset: 0xf0		PortID: N/A Device: 0		Function: 0 (DMI2 Mode)
Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x98		Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3
Bit	Attr	Default	Description	
2:2	RW	0x0	fatal_error_reporting_enable: Controls the reporting of fatal errors that IIO detects on the PCI Express/DMI interface. 0 = Reporting of Fatal error detected by device is disabled 1 = Reporting of Fatal error detected by device is enabled Refer to PCI Express Base Specification, Revision 2.0 for complete details of how this bit is used in conjunction with other bits to report errors. This bit is not used to control the reporting of other internal component uncorrectable fatal errors (at the port unit) in any way.	
1:1	RW	0x0	non_fatal_error_reporting_enable: Controls the reporting of non-fatal errors that IIO detects on the PCI Express/DMI interface. 0 = Reporting of Non Fatal error detected by device is disabled 1 = Reporting of Non Fatal error detected by device is enabled Refer to PCI Express Base Specification, Revision 2.0 for complete details of how this bit is used in conjunction with other bits to report errors. This bit is not used to control the reporting of other internal component uncorrectable non-fatal errors (at the port unit) in any way.	
0:0	RW	0x0	correctable_error_reporting_enable: Controls the reporting of correctable errors that IIO detects on the PCI Express/DMI interface 0 = Reporting of link Correctable error detected by the port is disabled 1 = Reporting of link Correctable error detected by port is enabled Refer to PCI Express Base Specification, Revision 2.0 for complete details of how this bit is used in conjunction with other bits to report errors. This bit is not used to control the reporting of other internal component correctable errors (at the port unit) in any way.	



8.2.44 devsts

PCI Express Device Status.

Type: CFG Bus: 0 Offset: 0xf2		PortID: N/A Device: 0		Function: 0 (DMI2 Mode)	
Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x9a		Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
5:5	RO	0x0	transactions_pending: Does not apply to Root/DMI ports, that is, bit hardwired to 0 for these devices.		
4:4	RO	0x0	aux_power_detected: Does not apply to the processor		
3:3	RW1C	0x0	unsupported_request_detected: This bit indicates that the root port or DMI port detected an Unsupported Request. Errors are logged in this register regardless of whether error reporting is enabled or not in the Device Control Register. 1: Unsupported Request detected at the device/port. These unsupported requests are NP requests inbound that the root port or DMI port received and it detected them as unsupported requests (for example, address decoding failures that the root port detected on a packet, receiving inbound lock reads, BME bit is clear and so forth). 0: No unsupported request detected by the root or DMI port Note: This bit is not set on peer-to-peer completions with UR status that are forwarded by the root port or DMI port to the PCIe/DMI link.		
2:2	RW1C	0x0	fatal_error_detected: This bit indicates that a fatal (uncorrectable) error is detected by the root or DMI port. Errors are logged in this register regardless of whether error reporting is enabled or not in the Device Control register. 1: Fatal errors detected 0: No Fatal errors detected		
1:1	RW1C	0x0	non_fatal_error_detected: This bit gets set if a non-fatal uncorrectable error is detected by the root or DMI port. Errors are logged in this register regardless of whether error reporting is enabled or not in the Device Control register. 1: Non Fatal errors detected 0: No non-Fatal Errors detected		
0:0	RW1C	0x0	correctable_error_detected: This bit gets set if a correctable error is detected by the root or DMI port. Errors are logged in this register regardless of whether error reporting is enabled or not in the PCI Express Device Control register. 1: correctable errors detected 0: No correctable errors detected		

8.2.45 Inkcip

PCI Express Link Capabilities

The Link Capabilities register identifies the PCI Express specific link capabilities. The link capabilities register needs some default values setup by the local host.



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x9c		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
31:24	RW_O	0x0	port_number: This field indicates the PCI Express port number for the link and is initialized by software/BIOS. IIO hardware does nothing with this bit.		
22:22	RW_O	0x1	aspm_optionality_compliance:		
21:21	RO_V	0x1	link_bandwidth_notification_capability: A value of 1b indicates support for the Link Bandwidth Notification status and interrupt mechanisms. Notes: This bit will only be set if either "Report Speed Change" or "Report Configuration Change" bits are set in the DBG2STAT register bits 22 and 20 respectively.		
20:20	RO	0x1	data_link_layer_link_active_reporting_capable: IIO supports reporting status of the data link layer so software knows when it can enumerate a device on the link or otherwise know the status of the link.		
19:19	RO	0x1	surprise_down_error_reporting_capable: IIO supports reporting a surprise down error condition		
18:18	RO	0x0	clock_power_management: Does not apply to processor		
17:15	RW_O	0x2	l1_exit_latency: This field indicates the L1 exit latency for the given PCI Express port. It indicates the length of time this port requires to complete transition from L1 to L0. 000: Less than 1us 001: 1 us to less than 2 us 010: 2 us to less than 4 us 011: 4 us to less than 8 us 100: 8 us to less than 16 us 101: 16 us to less than 32 us 110: 32 us to 64 us 111: More than 64us This register is made writable once by BIOS so that the value is settable based on experiments post-si.		
14:12	RW_O	0x3	l0s_exit_latency: This field indicates the L0s exit latency (i.e L0s to L0) for the PCI Express port. 000: Less than 64 ns 001: 64 ns to less than 128 ns 010: 128 ns to less than 256 ns 011: 256 ns to less than 512 ns 100: 512 ns to less than 1 us 101: 1 is to less than 2 us 110: 2 is to 4 us 111: More than 4 us This register is made writable once by BIOS so that the value is settable based on experiments post-si.		



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x9c		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
11:10	RW_O	0x3	active_state_link_pm_support: This field indicates the level of active state power management supported on the given PCI Express port. 00: Disabled 01: L0s Entry Supported 10: Reserved 11: L0s and L1 Supported		
9:4	RW_O	0x4	maximum_link_width: This field indicates the maximum width of the given PCI Express Link attached to the port. 000001: x1 000010: x2 000100: x4 001000: x8 010000: x16 Others: Reserved This is left as a RW-O register for bios to update based on the platform usage of the links.		
3:0	RW_O	0x3 0x1 (Device 0 Function 0)	maxlnkspd: This field indicates the maximum link speed of this Port. The encoding is the binary value of the bit location in the Supported Link Speeds Vector in LNKCAP2 that corresponds to the maximum link speed. Intel® Xeon® Processor E5 v2 product family supports a maximum of 8 Gbps, unless restricted by the Gen3OFF fuse. If Gen3OFF fuse is '1', this field defaults to 0010b 5Gbps If Gen3OFF fuse is '0' this field defaults to 0011b 8Gbps		

8.2.46 Inkcon

PCI Express Link Control

The PCI Express Link Control register controls the PCI Express Link specific parameters. The link control register needs some default values setup by the local host.

Type: CFG Bus: 0 Offset: 0x1b0		PortID: N/A Device: 0		Function: 0 (DMI2 Mode)	
Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xa0		Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
11:11	RW	0x0	link_autonomous_bandwidth_interrupt_enable: For root ports, when set to 1b this bit enables the generation of an interrupt to indicate that the Link Autonomous Bandwidth Status bit has been set. For DMI mode on Dev#0, interrupt is not supported and hence this bit is not useful. Expectation is that BIOS will set bit 27 in MISCCTRLSTS to notify the system of autonomous BW change event on that port.		



Type:	CFG	PortID:	N/A	Function:	0 (DMI2 Mode)
Bus:	0	Device:	0		
Offset:	0x1b0				
Bus:	0	Device:	0	Function:	0 (PCIe Mode)
Bus:	0	Device:	1	Function:	0-1
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0xa0				
Bit	Attr	Default	Description		
4:4	RW	0x0	link_disable: This field controls whether the link associated with the PCI Express/DMI port is enabled or disabled. When this bit is a 1, a previously configured link would return to the 'disabled' state as defined in the PCI Express Base Specification, Revision 2.0. When this bit is clear, an LTSSM in the 'disabled' state goes back to the detect state. 0: Enables the link associated with the PCI Express port 1: Disables the link associated with the PCI Express port		
3:3	RO	0x0	read_completion_boundary: Set to zero to indicate IIO could return read completions at 64B boundaries		
1:0	RW_V (Function 0) RW (Function 1-3)	0x0	active_state_link_pm_control: When 01b or 11b, L0s on transmitter is enabled, otherwise it is disabled. 10 and 11 enables L1 ASPM.		

8.2.47 Inksts

PCI Express Link Status

The PCI Express Link Status register provides information on the status of the PCI Express Link such as negotiated width, training, and so forth. The link status register needs some default values setup by the local host.

Type:	CFG	PortID:	N/A	Function:	0 (DMI2 Mode)
Bus:	0	Device:	0		
Offset:	0x1b2				
Bus:	0	Device:	0	Function:	0 (PCIe Mode)
Bus:	0	Device:	1	Function:	0-1
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0xa2				
Bit	Attr	Default	Description		
15:15	RW1C	0x0	link_autonomous_bandwidth_status: This bit is set to 1b by hardware to indicate that hardware has autonomously changed link speed or width, without the port transitioning through DL_Down status, for reasons other than to attempt to correct unreliable link operation. IIO does not, on its own, change speed or width autonomously for non-reliability reasons. IIO only sets this bit when it receives a width or speed change indication from downstream component that is not for link reliability reasons.		



Type: CFG Bus: 0 Offset: 0x1b2		PortID: N/A Device: 0		Function: 0 (DMI2 Mode)
Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xa2		Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3
Bit	Attr	Default	Description	
14:14	RW1C	0x0	link_bandwidth_management_status: This bit is set to 1b by hardware to indicate that either of the following has occurred without the port transitioning through DL_Down status: a) A link retraining initiated by a write of 1b to the Retrain Link bit has completed b) Hardware has autonomously changed link speed or width to attempt to correct unreliable link operation Note IIO also sets this bit when it receives a width or speed change indication from downstream component that is for link reliability reasons.	
13:13	RO_V	0x0	data_link_layer_link_active: Set to 1b when the Data Link Control and Management State Machine is in the DL_Active state, 0b otherwise. When this bit is 0b, the transaction layer associated with the link will abort all transactions that would otherwise be routed to that link.	
12:12	RW_O	0x1	slot_clock_configuration: This bit indicates whether the processor receives clock from the same xtal that also provides clock to the device on the other end of the link. 1: indicates that same xtal provides clocks to the processor and the slot or device on other end of the link 0: indicates that different xtals provide clocks to the processor and the slot or device on other end of the link In general, this field is expected to be set to 1b by BIOS based on board clock routing. This bit has to be set to 1b on DMI mode operation on Device#0.	
11:11	RO_V	0x0	link_training: This field indicates the status of an ongoing link training session in the PCI Express port 0: LTSSM has exited the recovery/configuration state. 1: LTSSM is in recovery/configuration state or the Retrain Link was set but training has not yet begun. The IIO hardware clears this bit once LTSSM has exited the recovery/configuration state. Refer to PCI Express Base Specification, Revision 2.0 for details of which states within the LTSSM would set this bit and which states would clear this bit.	
9:4	RO_V	0x0	negotiated_link_width: This field indicates the negotiated width of the given PCI Express link after training is completed. Only x1, x2, x4, x8 and x16 link width negotiations are possible in the processor for Device#1-2 and only x1, x2 and x4 on Device#0. A value of 0x01 in this field corresponds to a link width of x1, 0x02 indicates a link width of x2 and so on, with a value of 0x10 for a link width of x16. The value in this field is reserved and could show any value when the link is not up. Software determines if the link is up or not by reading bit 13 of this register.	
3:0	RO_V	0x1	current_link_speed:	

8.2.48 sltcap

PCI Express Slot Capabilities

The Slot Capabilities register identifies the PCI Express specific slot capabilities.



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0 (PCIe Mode)
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0xa4			
Bit	Attr	Default	Description
31:19	RW_O	0x0	<p>physical_slot_number:</p> <p>This field indicates the physical slot number of the slot connected to the PCI Express port and is initialized by BIOS.</p>
18:18	RO	0x0	<p>command_complete_not_capable:</p> <p>Intel® Xeon® Processor E5 v2 product family is capable of command complete interrupt.</p>
17:17	RW_O	0x0	<p>electromechanical_interlock_present:</p> <p>This bit when set indicates that an Electromechanical Interlock is implemented on the chassis for this slot and that lock is controlled by bit 11 in Slot Control register. This field is initialized by BIOS based on the system architecture. BIOS note: this capability is not set if the Electromechanical Interlock control is connected to main slot power control. This is expected to be used only for Express Module hotpluggable slots.</p>
16:15	RW_O	0x0	slot_power_limit_scale:
14:7	RW_O	0x0	slot_power_limit_value:
6:6	RW_O	0x0	<p>hot_plug_capable:</p> <p>This field defines hot-plug support capabilities for the PCI Express port. 0: indicates that this slot is not capable of supporting Hot-plug operations. 1: indicates that this slot is capable of supporting Hot-plug operations This bit is programmed by BIOS based on the system design. This bit must be programmed by bios to be consistent with the VPP enable bit for the port.</p>
5:5	RW_O	0x0	<p>hot_plug_surprise:</p> <p>This field indicates that a device in this slot may be removed from the system without prior notification. This field is initialized by BIOS. 0: indicates that hot-plug surprise is not supported 1: indicates that hot-plug surprise is supported Generally this bit is not expected to be set because the only know usage case for this is the ExpressCard FF. But that is not really expected usage in Intel® Xeon® Processor E5 v2 product family context. But this bit is present regardless to allow a usage if it arises. This bit is used by IIO hardware to determine if a transition from DL_active to DL_inactive is to be treated as a surprise down error or not. If a port is associated with a hotpluggable slot and the hotplug surprise bit is set, then any transition to DL_inactive is not considered an error. Refer to PCI Express Base Specification, Revision 2.0 for further details.</p>
4:4	RW_O	0x0	<p>power_indicator_present:</p> <p>This bit indicates that a Power Indicator is implemented for this slot and is electrically controlled by the chassis. 0: indicates that a Power Indicator that is electrically controlled by the chassis is not present 1: indicates that Power Indicator that is electrically controlled by the chassis is present BIOS programs this field with a 1 for CEMExpress Module FFs, if the slot is hotplug capable.</p>



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0 (PCIe Mode)
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0xa4			
Bit	Attr	Default	Description
3:3	RW_O	0x0	<p>attention_indicator_present:</p> <p>This bit indicates that an Attention Indicator is implemented for this slot and is electrically controlled by the chassis</p> <p>0: indicates that an Attention Indicator that is electrically controlled by the chassis is not present</p> <p>1: indicates that an Attention Indicator that is electrically controlled by the chassis is present</p> <p>BIOS programs this field with a 1 for CEMExpress Module FFs, if the slot is hotplug capable.</p>
2:2	RW_O	0x0	<p>mrl_sensor_present:</p> <p>This bit indicates that an MRL Sensor is implemented on the chassis for this slot.</p> <p>0: indicates that an MRL Sensor is not present</p> <p>1: indicates that an MRL Sensor is present</p> <p>BIOS programs this field with a 0 for Express Module FF always. If CEM slot is hotplug capable, BIOS programs this field with either 0 or 1 depending on system design.</p>
1:1	RW_O	0x0	<p>power_controller_present:</p> <p>This bit indicates that a software controllable power controller is implemented on the chassis for this slot.</p> <p>0: indicates that a software controllable power controller is not present</p> <p>1: indicates that a software controllable power controller is present</p> <p>BIOS programs this field with a 1 for CEMExpress Module FFs, if the slot is hotplug capable.</p>
0:0	RW_O	0x0	<p>attention_button_present:</p> <p>This bit indicates that the Attention Button event signal is routed from slot or on-board in the chassis to the IIO's hotplug controller.</p> <p>0: indicates that an Attention Button signal is routed to IIO</p> <p>1: indicates that an Attention Button is not routed to IIO</p> <p>BIOS programs this field with a 1 for CEMExpress Module FFs, if the slot is hotplug capable.</p>

8.2.49 sltcon

PCI Express Slot Control.

Any write to this register will set the Command Completed bit in the SLTSTS register, ONLY if the VPP enable bit for the port is set. If the port's VPP enable bit is set i.e. hotplug for that slot is enabled, then the required actions on VPP are completed before the Command Completed bit is set in the SLTSTS register. If the VPP enable bit for the port is clear, then the write simply updates this register see individual bit definitions for details but the Command Completed bit in the SLTSTS register is not set.



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0 (PCIe Mode)
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0xa8			
Bit	Attr	Default	Description
12:12	RWS	0x0	<p>data_link_layer_state_changed_enable:</p> <p>When set to 1, this field enables software notification when Data Link Layer Link Active bit in the LNKSTS register changes state</p>
11:11	RW	0x0	<p>electromechanical_interlock_control:</p> <p>When software writes either a 1 to this bit, IIO pulses the EMIL pin per It;Bluegt;PCI Express ServerWorkstation Module Electromechanical Spec Rev 1.0. Write of 0 has no effect. This bit always returns a 0 when read. If electromechanical lock is not implemented, then either a write of 1 or 0 to this register has no effect.</p>
10:10	RWS	0x1	<p>power_controller_control:</p> <p>If a power controller is implemented, when writes to this field will set the power state of the slot per the defined encodings. Reads of this field must reflect the value from the latest write, even if the corresponding hot-plug command is not executed yet at the VPP, unless software issues a write without waiting for the previous command to complete in which case the read value is undefined.</p> <p>0: Power On 1: Power Off</p> <p>Note: If the link experiences an unexpected DL_Down condition that is not the result of a Hot Plug removal, the processor follows the PCI Express specification for logging Surprise Link Down. SW is required to set SLTCON[10] to 0 (Power On) in all devices that do not connect to a slot that supports Hot-Plug to enable logging of this error in that device.</p> <p>For devices connected to slots supporting Hot-Plug operations, SLTCON[10] usage to control PWREN# assertion is as described elsewhere.</p>
9:8	RW	0x3	<p>power_indicator_control:</p> <p>If a Power Indicator is implemented, writes to this field will set the Power Indicator to the written state. Reads of this field must reflect the value from the latest write, even if the corresponding hot-plug command is not executed yet at the VPP, unless software issues a write without waiting for the previous command to complete in which case the read value is undefined.</p> <p>00: Reserved. 01: On 10: Blink (IIO drives 1 Hz square wave for Chassis mounted LEDs) 11: Off</p> <p>IIO does not generated the Power_Indicator_On/Off/Blink messages on PCI Express when this field is written to by software.</p>
7:6	RW	0x3	<p>attention_indicator_control:</p> <p>If an Attention Indicator is implemented, writes to this field will set the Attention Indicator to the written state. Reads of this field reflect the value from the latest write, even if the corresponding hot-plug command is not executed yet at the VPP, unless software issues a write without waiting for the previous command to complete in which case the read value is undefined.</p> <p>00: Reserved. 01: On 10: Blink (Processor drives 1 Hz square wave) 11: Off</p> <p>IIO does not generated the Attention_Indicator_On/Off/Blink messages on PCI Express when this field is written to by software.</p>



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xa8		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
5:5	RW	0x0	hot_plug_interrupt_enable: When set to 1b, this bit enables generation of Hot-Plug interrupt MSI or INTx interrupt depending on the setting of the MSI enable bit in MSICTRL on enabled Hot-Plug events, provided ACPI mode for hotplug is disabled. 0: disables interrupt generation on Hot-plug events 1: enables interrupt generation on Hot-plug events		
4:4	RW	0x0	command_completed_interrupt_enable: This field enables software notification Interrupt - MSIINTx or WAKE when a command is completed by the Hot-plug controller connected to the PCI Express port 0 = disables hot-plug interrupts on a command completion by a hot-plug Controller 1 = Enables hot-plug interrupts on a command completion by a hot-plug Controller		
3:3	RW	0x0	presence_detect_changed_enable: This bit enables the generation of hot-plug interrupts or wake messages via a presence detect changed event. 0 = Disables generation of hot-plug interrupts or wake messages when a presence detect changed event happens. 1 = Enables generation of hot-plug interrupts or wake messages when a presence detect changed event happens.		
2:2	RW	0x0	mrl_sensor_changed_enable: This bit enables the generation of hot-plug interrupts or wake messages via a MRL Sensor changed event. 0: disables generation of hot-plug interrupts or wake messages when an MRL Sensor changed event happens. 1: Enables generation of hot-plug interrupts or wake messages when an MRL Sensor changed event happens.		
1:1	RW	0x0	power_fault_detected_enable: This bit enables the generation of hot-plug interrupts or wake messages via a power fault event. 0 = Disables generation of hot-plug interrupts or wake messages when a power fault event happens. 1 = Enables generation of hot-plug interrupts or wake messages when a power fault event happens.		
0:0	RW	0x0	attention_button_pressed_enable: This bit enables the generation of hot-plug interrupts or wake messages via an attention button pressed event. 0 = Disables generation of hot-plug interrupts or wake messages when the attention button is pressed. 1 = Enables generation of hot-plug interrupts or wake messages when the attention button is pressed.		

8.2.50 sltsts

PCI Express Slot Status

The PCI Express Slot Status register defines important status information for operations such as hot-plug and Power Management.



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0 (PCIe Mode)
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0xaa			
Bit	Attr	Default	Description
8:8	RW1C	0x0	<p>data_link_layer_state_changed:</p> <p>This bit is set (if it is not already set) when the state of the Data Link Layer Link Active bit in the Link Status register changes. Software must read Data Link Layer Active field to determine the link state before initiating configuration cycles to the hot plugged device.</p>
7:7	RO_V	0x0	<p>electromechanical_latch_status:</p> <p>When read this register returns the current state of the Electromechanical Interlock (the EMILS pin) which has the defined encodings as: 0 = Electromechanical Interlock Disengaged 1 = Electromechanical Interlock Engaged</p>
6:6	RO_V	0x0	<p>presence_detect_state:</p> <p>For ports with slots (where the Slot Implemented bit of the PCI Express Capabilities Registers is 1b), this field is the logical OR of the Presence Detect status determined via an in-band mechanism and sideband Present Detect pins. Refer to how PCI Express Base Specification, Revision 2.0 for how the inband presence detect mechanism works (certain states in the LTSSM constitute 'card present' and others don't). 0 = Card/Module slot empty 1 = Card/module Present in slot (powered or unpowered) For ports with no slots, IIO hardwires this bit to 1b. Note: OS could get confused when it sees an empty PCI Express root port i.e. 'no slots + no presence', since this is now disallowed in the spec. So bios must hide all unused root ports devices in IIO config space, via the DEVHIDE register. Refer to RAS Chapter for details of how this bit is shifted in on the VPP bit stream.</p>
5:5	RO_V	0x0	<p>mrl_sensor_state:</p> <p>This bit reports the status of an MRL sensor if it is implemented. 0 = MRL Closed 1 = MRL Open Refer to RAS Chapter for details of how this bit is shifted in on the VPP bit stream.</p>
4:4	RW1C	0x0	<p>command_completed:</p> <p>This bit is set by IIO when the hot-plug command has completed and the hot-plug controller is ready to accept a subsequent command. It is subsequently cleared by software after the field has been read and processed. This bit provides no guarantee that the action corresponding to the command is complete. Any write to SLTCON (regardless of the port is capable or enabled for hot-plug) is considered a 'hot-plug' command. If the port is not hot-plug capable or hot-plug enabled, then the hot-plug command does not trigger any action on the VPP port but the command is still completed via this bit.</p>
3:3	RW1C	0x0	<p>presence_detect_changed:</p> <p>This bit is set by IIO when the value reported in bit 6 is changes. It is subsequently cleared by software after the field has been read and processed.</p>
2:2	RW1C	0x0	<p>mrl_sensor_changed:</p> <p>This bit is set if the value reported in bit 5 changes. It is subsequently cleared by software after the field has been read and processed.</p>



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xaa		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
1:1	RW1C	0x0	power_fault_detected: This bit is set by IIO when a power fault event is detected by the power controller (which is reported via the VPP bit stream). It is subsequently cleared by software after the field has been read and processed. Refer to RAS Chapter for details of how this bit is shifted in on the VPP bit stream.		
0:0	RW1C	0x0	attention_button_pressed: This bit is set by IIO when the attention button is pressed. It is subsequently cleared by software after the field has been read and processed. Refer to RAS Chapter for details of how this bit is shifted in on the VPP bit stream. IIO silently discards the AttentionButtonPressed message if received from PCI Express link without updating this bit.		


8.2.51 rootcon

PCI Express Root Control.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xac		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
4:4	RW	0x0	crsswvisen: CRS software visibility Enable This bit, when set, enables the Root Port to return Configuration Request Retry Status (CRS) Completion Status to software. If 0, retry status cannot be returned to software and the request is handled as described in the 'Configuration Retry Completion,' and 'Transaction Flows' Chapter in the EDS Volume 3		
3:3	RW RW_L (Device 3 Function 0 only)	0x0	pmeinten: This field controls the generation of MSI interrupts INTx interrupts for PME messages. 1 = Enables interrupt generation upon receipt of a PME message 0 = Disables interrupt generation for PME messages		



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0xac			
Bit	Attr	Default	Description
2:2	RW	0x0	<p>seseen:</p> <p>System Error on Fatal Error Enable</p> <p>This field enables notifying the internal IIO core error logic of occurrence of an uncorrectable fatal error at the port or below its hierarchy. The internal core error logic of IIO then decides if/how to escalate the error further (pins/ message etc). Refer to RAS Chapter in EDS Volume 3 for details of how/which system notification is generated for a PCI Express fatal error.1: indicates that an internal IIO core error logic notification should be generated if a fatal error (ERR_FATAL) is reported by any of the devices in the hierarchy associated with and including this port.</p> <p>0: No internal IIO core error logic notification should be generated on a fatal error (ERR_FATAL) reported by any of the devices in the hierarchy associated with and including this port.</p> <p>Note that generation of system notification on a PCI Express fatal error is orthogonal to generation of an MSI/INTx interrupt for the same error. Both a system error and MSI/INTx can be generated on a fatal error or software can chose one of the two.</p> <p>Refer to PCI Express Base Specification, Revision 2.0 for details of how this bit is used in conjunction with other error control bits to generate core logic notification of error events in a PCI Express port.</p> <p>Note that since this register is defined only in PCIe mode for Device#0, this bit will read a 0 in DMI mode. So, to enable core error logic notification on DMI mode fatal errors, BIOS must set bit 35 of MISCCTRLSTS to a 1 (to override this bit) on Device#0 in DMI mode.</p>
1:1	RW	0x0	<p>senfeen:</p> <p>System Error on Non-Fatal Error Enable</p> <p>This field enables notifying the internal IIO core error logic of occurrence of an uncorrectable non-fatal error at the port or below its hierarchy. The internal IIO core error logic then decides if/how to escalate the error further (pins/ message etc). Refer to RAS Chapter in the EDS Volume 3 details of how/which system notification is generated for a PCI Express non-fatal error.1: indicates that a internal IIO core error logic notification should be generated if a non-fatal error (ERR_NONFATAL) is reported by any of the devices in the hierarchy associated with and including this port.</p> <p>0: No internal core error logic notification should be generated on a non-fatal error (ERR_NONFATAL) reported by any of the devices in the hierarchy associated with and including this port.</p> <p>Note that generation of system notification on a PCI Express non-fatal error is orthogonal to generation of an MSI/INTx interrupt for the same error. Both a system error and MSI/INTx can be generated on a non-fatal error or software can chose one of the two.</p> <p>Refer to PCI Express Base Specification, Revision 2.0 for details of how this bit is used in conjunction with other error control bits to generate core logic notification of error events in a PCI Express port.</p> <p>Note that since this register is defined only in PCIe mode for Device#0, this bit will read a 0 in DMI mode. So, to enable core error logic notification on DMI mode non-fatal errors, BIOS must set bit 34 of MISCCTRLSTS to a 1 (to override this bit) on Device#0 in DMI mode.</p>



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xac		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3
Bit	Attr	Default	Description	
0:0	RW	0x0	seceen: System Error on Correctable Error Enable This field controls notifying the internal IIO core error logic of the occurrence of a correctable error in the device or below its hierarchy. The internal core error logic of IIO then decides if/how to escalate the error further (pins/ message etc). Refer to RAS Chapter IN EDS Volume 3 for details of how/which system notification is generated for a PCI Express correctable error. 1: indicates that an internal core error logic notification should be generated if a correctable error (ERR_COR) is reported by any of the devices in the hierarchy associated with and including this port. 0: No internal core error logic notification should be generated on a correctable error (ERR_COR) reported by any of the devices in the hierarchy associated with and including this port. Note that generation of system notification on a PCI Express correctable error is orthogonal to generation of an MSI/INTx interrupt for the same error. Both a system error and MSI/INTx can be generated on a correctable error or software can chose one of the two. Refer to PCI Express Base Specification, Revision 2.0 for details of how this bit is used in conjunction with other error control bits to generate core logic notification of error events in a PCI Express port. Note that since this register is defined only in PCIe mode for Device#0, this bit will read a 0 in DMI mode. So, to enable core error logic notification on DMI mode correctable errors, BIOS must set bit 33 of MISCTRLSTS to a 1 (to override this bit) on Device#0 in DMI mode.	

8.2.52 rootcap

PCI Express Root Capabilities.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xae		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3
Bit	Attr	Default	Description	
0:0	RO RW_O (Device 0 Function 0)	0x1 0x0 (Device 0 Function 0, DMI2 mode)	crs_software_visibility: This bit, when set, indicates that the Root Port is capable of returning Configuration Request Retry Status (CRS) Completion Status to software. Intel® Xeon® Processor E5 v2 product family supports this capability.	



8.2.53 rootsts

PCI Express Root Status.

Type:	CFG	PortID:	N/A	Function:	0 (PCIe Mode)
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0xb0				

Bit	Attr	Default	Description
17:17	RO_V	0x0	<p>pme_pending:</p> <p>This field indicates that another PME is pending when the PME Status bit is set. When the PME Status bit is cleared by software; the pending PME is delivered by hardware by setting the PME Status bit again and updating the Requestor ID appropriately. The PME pending bit is cleared by hardware if no more PMEs are pending.</p>
16:16	RW1C	0x0	<p>pme_status:</p> <p>This field indicates a PM_PME message (either from the link or internally from within that root port) was received at the port. 1: PME was asserted by a requester as indicated by the PME Requester ID field This bit is cleared by software by writing a '1'. Note that the root port itself could be the source of a PME event when a hotplug event is observed when the port is in D3hot state.</p>
15:0	RO_V	0x0	<p>pme_requester_id:</p> <p>This field indicates the PCI requester ID of the last PME requester. If the root port itself was the source of the (virtual) PME message, then a RequesterID of CPUBUSNO0:DevNo:FunctionNo is logged in this field.</p>

8.2.54 devcap2

PCI Express Device Capabilities 2 Register.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0xb4				

Bit	Attr	Default	Description
13:12	RW_O	0x1	<p>tph_completer_supported:</p> <p>Indicates the support for TLP Processing Hints. Processor does not support the extended TPH header. 00: TPH and Extended TPH Completer not supported. 01: TPH Completer supported; Extended TPH Completer not supported. 10: Reserved. 11: Both TPH and Extended TPH Completer supported.</p>
9:9	RO	0x1	atomic128bcascompsup:
8:8	RO	0x1	atomic64bccompsup:
7:7	RO	0x1	atomic32bccompsup:
6:6	RO	0x0	atomicroutsup:



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xb4		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
5:5	RW_O	0x1	ari_en: Alternative RID InterpretationCapable This bit is set to 1b indicating Root Port supports this capability.		
4:4	RO	0x1	cmpltodissup: Completion Timeout Disable Supported IIO supports disabling completion timeout		
3:0	RO	0xe	cmpltovalsup: Completion Timeout Values Supported This field indicates device support for the optional Completion Timeout programmability mechanism. This mechanism allows system software to modify the Completion Timeout range. Bits are one-hot encoded and set according to the table below to show timeout value ranges supported. A device that supports the optional capability of Completion Timeout Programmability must set at least two bits. Four time values ranges are defined: Range A: 50 us to 10 ms Range B: 10 ms to 250 ms Range C: 250 ms to 4 s Range D: 4 s to 64 s Bits are set according to table below to show timeout value ranges supported. 0000b: Completions Timeout programming not supported – values is fixed by implementation in the range 50 us to 50 ms. 0001b: Range A 0010b: Range B 0011b: Range A & B 0110b: Range B & C 0111b: Range A, B, & C 1110b: Range B, C D 1111b: Range A, B, C & D All other values are reserved. IIO supports timeout values up to 10 ms-64 s		

8.2.55 devctrl2

PCI Express Device Control Register 2.

Type: CFG Bus: 0 Offset: 0xf8		PortID: N/A Device: 0		Function: 0 (DMI2 Mode)	
Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xb8		Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
7:7	RO	0x0	atomicgressblock:		
6:6	RO	0x0	atomicreqn:		



Type: CFG Bus: 0 Offset: 0xf8		PortID: N/A Device: 0	Function: 0 (DMI2 Mode)
Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xb8		Device: 0 Device: 1 Device: 2 Device: 3	Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3
Bit	Attr	Default	Description
5:5	RW_L	0x0	ari: Alternative RID Interpretation Enable Applies only to root ports. When set to 1b, ARI is enabled for the Root Port. For Device#0 in DMI mode, this bit is ignored
4:4	RW_V (Device 2 and 3 Function 0) RW (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x0 0x1 (Device 0 Function 0)	compltodis: Completion Timeout Disable When set to 1b, this bit disables the Completion Timeout mechanism for all NP tx that IIO issues on the PCIe/DMI link. When 0b, completion timeout is enabled. Software can change this field while there is active traffic in the root/DMI port.
3:0	RW_V (Device 2 and 3 Function 0) RW (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x0	compltov: Completion Timeout Value on NP Tx that IIO issues on PCIe/DMI In Devices that support Completion Timeout programmability, this field allows system software to modify the Completion Timeout range. The following encodings and corresponding timeout ranges are defined: 0000b = 10 ms to 50 ms 0001b = Reserved (IIO aliases to 0000b) 0010b = Reserved (IIO aliases to 0000b) 0101b = 16 ms to 55 ms 0110b = 65 ms to 210 ms 1001b = 260 ms to 900 ms 1010b = 1 s to 3.5 s 1101b = 4 s to 13 s 1110b = 17 s to 64 s When software selects 17 s to 64 s range, CTOCTRL further controls the timeout value within that range. For all other ranges selected by OS, the timeout value within that range is fixed in IIO hardware. Software can change this field while there is active traffic in the root port. This value will also be used to control PME_TO_ACK Timeout. That is this field sets the timeout value for receiving a PME_TO_ACK message after a PME_TURN_OFF message has been transmitted. The PME_TO_ACK Timeout has meaning only if bit 6 of MISCTRLSTS register is set to a 1b.



8.2.56 Inkcap2

PCI Express Link Capabilities 2.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xbc		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
7:1	RW_O	0x7 0x3 (Device 0 Function 0)	Inkspdvec: Supported Link Speeds Vector - This field indicates the supported Link speeds of the associated Port. For each bit, a value of 1b indicates that the corresponding Link speed is supported; otherwise, the Link speed is not supported. Bit definitions are: Bit 1 2.5 GTs set in CPU Bit 2 5.0 GTs set in CPU Bit 3 8.0 GTs set in CPU if Gen3OFF fuse is not blown Bits 7:4 reserved CPU supports all speeds, unless Gen3OFF fuse is set, then only Gen1 and Gen2 are supported.		

8.2.57 Inkcon2

Type: CFG Bus: 0 Offset: 0x1c0 Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xc0		PortID: N/A Device: 0 Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (DMI2 Mode) Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
15:12 12:12 (Device 0 Function 0)	RWS	0x0	compliance_de_emphasis: For 8 GT/s Data Rate: This bit sets the Transmitter Preset level in Polling.Compliance state if the entry occurred due to the Enter Compliance bit being 1b. The Encodings are defined as follows: 0000b: -6 dB for de-emphasis, 0 dB for preshoot 0001b: -3.5 dB for de-emphasis, 0 dB for preshoot 0010b: -4.5 dB for de-emphasis, 0 dB for preshoot 0011b: -2.5 dB for de-emphasis, 0 dB for preshoot 0100b: 0 dB for de-emphasis, 0 dB for preshoot 0101b: 0 dB for de-emphasis, 2 dB for preshoot 0110b: 0 dB for de-emphasis, 2.5 dB for preshoot 0111b: -6 dB for de-emphasis, 3.5 dB for preshoot 1000b: -3.5 dB for de-emphasis, 3.5 dB for preshoot 1001b: 0 dB for de-emphasis, 3.5 dB for preshoot Others: reserved For 5 GT/s Data Rate: This bit sets the de-emphasis level in Polling.Compliance state if the entry occurred due to the Enter Compliance bit being 1b. Encodings: 0001b: -3.5 dB 0000b: -6 dB For 2.5 GT/s Data Rate: The setting of this field has no effect. Components that support only 2.5 GT/s speed are permitted to hardwire this field to 0h. Notes: This bit is intended for debug, compliance testing purposes. System firmware and software is allowed to modify this bit only during debug or compliance testing.		



Integrated I/O (IIO) Configuration Registers

Type: CFG Bus: 0 Offset: 0x1c0 Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xc0		PortID: N/A Device: 0 Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (DMI2 Mode) Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
11:11	RWS	0x0	<p>compliance_sos:</p> <p>When set to 1b, the LTSSM is required to send SKP Ordered Sets periodically in between the (modified) compliance patterns.</p>		
10:10	RWS	0x0	<p>enter_modified_compliance:</p> <p>When this bit is set to 1b, the device transmits Modified Compliance Pattern if the LTSSM enters Polling.Compliance substate.</p>		
9:7	RWS_V	0x0	<p>transmit_margin:</p> <p>This field controls the value of the nondeemphasized voltage level at the Transmitter pins.</p>		
6:6	RW_O	0x0	<p>selectable_de_emphasis:</p> <p>When the Link is operating at 5.0 GT/s speed, this bit selects the level of de-emphasis for an Upstream component. Encodings: 1b -3.5 dB 0b -6 dB When the Link is operating at 2.5 GT/s speed, the setting of this bit has no effect.</p>		
5:5	RWS	0x0	<p>hardware_autonomous_speed_disable:</p> <p>When Set, this bit disables hardware from changing the Link speed for device specific reasons other than attempting to correct unreliable Link operation by reducing Link speed.</p>		
4:4	RWS_V	0x0	<p>enter_compliance:</p> <p>Software is permitted to force a link to enter Compliance mode at the speed indicated in the Target Link Speed field by setting this bit to 1b in both components on a link and then initiating a hot reset on the link.</p>		
3:0	RWS_V	0x3 0x2 (Device 0 Function 0)	<p>target_link_speed:</p> <p>This field sets an upper limit on link operational speed by restricting the values advertised by the upstream component in its training sequences. Defined encodings are: 0001b 2.5Gb/s Target Link Speed 0010b 5Gb/s Target Link Speed 0011b 8Gb/s Target Link Speed (Reserved for Device 0 Function 0) All other encodings are reserved. If a value is written to this field that does not correspond to a speed included in the Supported Link Speeds field, IIO will default to Gen1 speed. This field is also used to set the target compliance mode speed when software is using the Enter Compliance bit to force a link into compliance mode.</p>		



8.2.58 Inksts2

PCI Express Link Status Register 2.

Type: CFG Bus: 0 Offset: 0x1c2		PortID: N/A Device: 0		Function: 0 (DMI 2 Mode)
Bus: 0 Device: 0 Function: 0 Offset: 0xc2		Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3
Bit	Attr	Default	Description	
5:5	RW1CS	0x0	Inkeqreq: This bit is Set by hardware to request Link equalization process to be performed on the link. Reserved for Device 0 Function 0.	
4:4	RO_V	0x0	eqph3_succ: When set to 1b, this indicates that Phase 3 of the Transmitter Equalization procedure has successfully completed. Reserved for Device 0 Function 0.	
3:3	RO_V	0x0	eqph2_succ: When set to 1b, this indicates that Phase 2 of the Transmitter Equalization procedure has successfully completed. Reserved for Device 0 Function 0.	
2:2	RO_V	0x0	eqph1_succ: When set to 1b, this indicates that Phase 1 of the Transmitter Equalization procedure has successfully completed. Reserved for Device 0 Function 0.	
1:1	RO_V	0x0	eqcmp: When set to 1b, this indicates that the Transmitter Equalization procedure has completed. Reserved for Device 0 Function 0.	
0:0	RO_V	0x0	current_de_emphasis_level: When operating at Gen2 speed, this reports the current de-emphasis level. This field is Unused for Gen1 speeds 1b: -3.5 dB 0b: -6 dB	



8.2.59 pmcap

Power Management Capabilities

The PM Capabilities Register defines the capability ID, next pointer and other power management related support. The following PM registers/capabilities are added for software compliance.

Type:	CFG	PortID:	N/A
Bus:	0	Device:	0
Bus:	0	Device:	1
Bus:	0	Device:	2
Bus:	0	Device:	3
Offset:	0xe0	Function:	0
		Function:	0-1
		Function:	0-3
		Function:	0-3

Bit	Attr	Default	Description
31:27	RO_V	0x19	pme_support: For DMI it should be 0, 0x19 for the PCIe ports. Bits 31, 30 and 27 must be set to q1q for PCI-PCI bridge structures representing ports on root complexes.
26:26	RO	0x0	d2_support: IOxAPIC does not support power management state D2.
25:25	RO	0x0	d1_support: IOxAPIC does not support power management state D1.
24:22	RO	0x0	aux_current:
21:21	RO	0x0	device_specific_initialization:
19:19	RO	0x0	pme_clock: This field is hardwired to 0h as it does not apply to PCI Express.
18:16	RO	0x3	version: This field is set to 3h PM 1.2 compliant as version number. Bit is RW-O to make the version 2h incase legacy OS'es have any issues.
15:8	RO	0x0	next_capability_pointer: This is the last capability in the chain and hence set to 0.
7:0	RO	0x1	capability_id: Provides the PM capability ID assigned by PCI-SIG.

8.2.60 pmcsr

Power Management Control and Status Register

This register provides status and control information for PM events in the PCI Express port of the IIO.

Type:	CFG	PortID:	N/A
Bus:	0	Device:	0
Bus:	0	Device:	1
Bus:	0	Device:	2
Bus:	0	Device:	3
Offset:	0xe4	Function:	0
		Function:	0-1
		Function:	0-3
		Function:	0-3

Bit	Attr	Default	Description
31:24	RO	0x0	data: Not relevant for IOxAPIC
23:23	RO	0x0	bus_power_clock_control_enable: Not relevant for IOxAPIC



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0xe4		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
22:22	RO	0x0	b2_b3_support: Not relevant for IOxAPIC		
15:15	RW1CS	0x0	pme_status: Not relevant for IOxAPIC		
14:13	RO	0x0	data_scale: Not relevant for IOxAPIC		
12:9	RO	0x0	data_select: Not relevant for IOxAPIC		
8:8	RWS RWS_L (Device 3 Function 0)	0x0	pme_enable: Not relevant for IOxAPIC		
3:3	RW_O	0x1	no_soft_reset: Indicates IOxAPIC does not reset its registers when transitioning from D3hot to D0.		
1:0	RW RW_L (Device 0 Function 0)	0x0	power_state: This 2-bit field is used to determine the current power state of the function and to set a new power state as well. 00: D0 01: D1 (not supported by IIO) 10: D2 (not supported by IIO) 11: D3hot If Software tries to write 01 or 10 to this field, the power state does not change from the existing power state which is either D0 or D3hot and nor do these bits1:0 change value. When in D3hot state, IOxAPIC will a) respond to only Type 0 configuration transactions targeted at the device's configuration space, when in D3hot state c) will not respond to memory i.e. D3hot state is equivalent to MSE , accesses to MBAR region note: ABAR region access still go through in D3hot state, if it enabled d) will not generate any MSI writes		

8.2.61 xpreut_hdr_ext

REUT PCIe Header Extended.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x100		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
31:20	RO RO_V (Device 0 Function 0)	0x110	pcienextptr: Next Capability Pointer This field contains the offset to the next PCI capability structure or 00h if no other items exist in the linked list of capabilities. In DMI Mode, it points to the Vendor Specific Error Capability. In PCIe Mode, it points to the ACS Capability.		



Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x100				

Bit	Attr	Default	Description
19:16	RO	0x1	pciecapversion: Capability Version: This field is a PCI-SIG defined version number that indicates the nature and format of the extended capability. This indicates the version of the REUT Capability.
15:0	RO	0xb	pciecapid: PCIe Extended CapID: This field has the value 0Bh to identify the CAP_ID assigned by the PCI SIG indicating a vendor specific capability.

8.2.62 xpreut_hdr_cap

REUT PCIe Header Capability.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x104				

Bit	Attr	Default	Description
31:20	RO	0xc	vseclength: VSEC Length This field defines the length of the REUT 'capability body'. The size of the leaf body is 12 bytes including the _EXT, _CAP and _LEF registers
19:16	RO	0x0	vsecidrev: REUT VSECID Rev This field is defined as the version number that indicates the nature and format of the VSEC structure. Software must qualify the Vendor ID before interpreting this field.
15:0	RO	0x2	vsecid: REUT Engine VSECID This field is an Intel-defined ID number that indicates the nature and format of the VSEC structure. Software must qualify the Vendor ID before interpreting this field. Notes: A value of '00h' is reserved A value of '01h' is the ID Council defined for REUT engines. A value of '02h' is specified for the REUT 'leaf' capability structure which resides in each link which in supported by a REUT engine.



8.2.63 xpreut_hdr_lef

REUT Header Leaf Capability.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x108		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
15:8	RO_V	0x38 0x30 (Device 0 Function 0)	leafreutdevnum: This field identifies the PCI Device/Function # where the REUT engine associated with this link resides. Device6 = 00110b & function0 = 000b = 30h		
7:0	RO_V	0x7	leafreutengid: This field identifies the REUT engine associated with the link (same as the REUT ID).		

8.2.64 accscaphdr

Access Control Services Extended Capability Header.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x110		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 (PCIe Mode) Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
31:20	RO_V	0x148	next_capability_offset: This field points to the next Capability in extended configuration space. In PCIe Mode, it points to the Advanced Error Capability.		
19:16	RO	0x1	capability_version: Set to 1h for this version of the PCI Express logic		
15:0	RO	0xd	pci_express_extended_cap_id: Assigned for Access Control Services capability by PCISIG.		



8.2.65 acscap

Access Control Services Capability Register.

Type:	CFG	PortID:	N/A	Function:	0 (PCIe mode)
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x114				

Bit	Attr	Default	Description
15:8	RO	0x0	egress_control_vector_size: N/A for IIO
6:6	RO	0x0	t: Applies only to root ports. Indicates that the component does not implement ACS Direct Translated P2P.
5:5	RO	0x0	e: Applies only to root portsIndicates that the component does not implement ACS P2P Egress Control.
4:4	RO_V (Device 2 and 3 Function 0) RO (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x1	u: Applies only to root ports. Indicates that the component implements ACS Upstream Forwarding.
3:3	RO_V (Device 2 and 3 Function 0) RO (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x1	c: Applies only to root ports. Indicates that the component implements ACS P2P Completion Redirect.
2:2	RO_V (Device 2 and 3 Function 0) RO (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x1	r: Applies only to root ports. Indicates that the component implements ACS P2P Request Redirect.
1:1	RO_V (Device 2 and 3 Function 0) RO (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x1	b: Applies only to root ports Indicates that the component implements ACS Translation Blocking.
0:0	RO_V (Device 2 and 3 Function 0) RO (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x1	v: Applies only to root ports Indicates that the component implements ACS Source Validation.

8.2.66 acsctrl

Access Control Services Control Register.

Type:	CFG	PortID:	N/A	Function:	0 (PCIe Mode)
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x116				

Bit	Attr	Default	Description
6:6	RO	0x0	t: Applies only to root ports. This is hardwired to 0b as the component does not implement ACS Direct Translated P2P.



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0 (PCIe Mode)
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x116			

Bit	Attr	Default	Description
5:5	RO	0x0	e: Applies only to root ports. The component does not implement ACS P2P Egress Control and hence this bit should not be used by SW.
4:4	RW_L (Device 2 and 3 Function 0) RW (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x0	u: When this bit is set, transactions arriving from a root port that target the same port back down, will be forwarded. Normally such traffic would be aborted. Applies only to root ports.
3:3	RW_L (Device 2 and 3 Function 0) RW (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x0	c: Applies only to root ports. Determines when the component redirects peer-to-peer Completions upstream; applicable only to Read Completions whose Relaxed Ordering Attribute is clear.
2:2	RW_L (Device 2 and 3 Function 0) RW (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x0	r: When this bit is set, transactions arriving from a root port that target the same port back down, will be forwarded. Normally such traffic would be aborted. Applies only to root ports.
1:1	RW_L (Device 2 and 3 Function 0) RW (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x0	b: Applies only to root ports. When set, the component blocks all upstream Memory Requests whose Address Translation AT field is not set to the default value.
0:0	RW_L (Device 2 and 3 Function 0) RW (Device 0 Function 0, Device 2 and 3 Function 1-3)	0x0	v: Applies only to root ports. When set, the component validates the Bus Number from the Requester ID of upstream Requests against the secondary subordinate Bus Numbers.

8.2.67 apicbase

ACPI Base Register.

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x140			

Bit	Attr	Default	Description
11:1	RW	0x0	addr: Bits 31:20 are assumed to be 0xFECh. Bits 8:0 are a don't care for address decode. Address decoding to the APIC range is done as APICBASE.ADDR[31:8] <= A[31:8] <= APICLIMIT.ADDR[31:8]. Outbound accesses to the APIC range are claimed by the root port and forwarded to PCIe, if bit 0 is set, even if the MSE bit of the root port is clear or the root port itself is in D3hot state.
0:0	RW	0x0	en: enables the decode of the APIC window



8.2.68 apiclimit

ACPI Limit Register.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x142				

Bit	Attr	Default	Description
11:1	RW	0x0	<p>addr:</p> <p>Applies only to root ports.</p> <p>Bits 31:20 are assumed to be 0xFECh. Bits 8:0 are a don't care for address decode. Address decoding to the APIC range is done as APICBASE.ADDR[31:8] <= A[31:8] <= APICLIMIT.ADDR[31:8].</p> <p>Outbound accesses to the APIC range are claimed by the root port and forwarded to PCIe, if the range is enabled, even if the MSE bit of the root port is clear or the root port itself is in D3hot state.</p>

8.2.69 vsecphdr

PCI Express Enhanced Capability Header - DMI2 Mode.

Type:	CFG	PortID:	N/A	Function:	0 (DMI2 Mode)
Bus:	0	Device:	0		
Offset:	0x144				

Bit	Attr	Default	Description
31:20	RO	0x1d0	<p>next_capability_offset:</p> <p>This field points to the next Capability in extended configuration space or is 0 if it is that last capability.</p>
19:16	RO	0x1	<p>capability_version:</p> <p>Set to 1h for this version of the PCI Express logic</p>
15:0	RO	0xb	<p>pci_express_extended_cap_id:</p> <p>Assigned for Vendor Specific Capability</p>

8.2.70 vshdr

Vendor Specific Header - DMI2 Mode.

Type:	CFG	PortID:	N/A	Function:	0 (DMI2 Mode)
Bus:	0	Device:	3		
Offset:	0x148				

Bit	Attr	Default	Description
31:20	RO	0x3c	<p>vsec_length:</p> <p>This field points to the next Capability in extended configuration space which is the ACS capability at 150h.</p>



Type: CFG		PortID: N/A	
Bus: 0		Device: 3	
Offset: 0x148		Function: 0 (DMI2 Mode)	
Bit	Attr	Default	Description
19:16	RO	0x1	vsec_version: Set to 1h for this version of the PCI Express logic
15:0	RO	0x4	vsec_id: Identifies Intel Vendor Specific Capability for AER on DMI

8.2.71 errcaphdr

PCI Express Enhanced Capability Header - Root Ports.

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	
Bus: 0		Device: 1	
Bus: 0		Device: 2	
Bus: 0		Device: 3	
Offset: 0x148		Function: 0 (PCIe Mode)	
		Function: 0-1	
		Function: 0-3	
		Function: 0-3	
Bit	Attr	Default	Description
31:20	RO	0x1d0	next_capability_offset: This field points to the next Capability in extended configuration space or is 0 if it is that last capability.
19:16	RO	0x1	capability_version: Set to 1h for this version of the PCI Express logic
15:0	RO	0x1	pci_express_extended_cap_id: Assigned for advanced error reporting

8.2.72 uncerrsts

Uncorrectable Error Status.

This register identifies uncorrectable errors detected for PCI Express/DMI port.

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	
Bus: 0		Device: 1	
Bus: 0		Device: 2	
Bus: 0		Device: 3	
Offset: 0x14c		Function: 0	
		Function: 0-1	
		Function: 0-3	
		Function: 0-3	
Bit	Attr	Default	Description
21:21	RW1CS	0x0	acs_violation_status:
20:20	RW1CS	0x0	received_an_unsupported_request:
18:18	RW1CS	0x0	malformed_tlp_status:
17:17	RW1CS	0x0	receiver_buffer_overflow_status:
16:16	RW1CS	0x0	unexpected_completion_status:
15:15	RW1CS	0x0	completer_abort_status:



Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x14c			

Bit	Attr	Default	Description
14:14	RW1CS	0x0	completion_time_out_status:
13:13	RW1CS	0x0	flow_control_protocol_error_status:
12:12	RW1CS	0x0	poisoned_tlp_status:
5:5	RW1CS	0x0	surprise_down_error_status:
4:4	RW1CS	0x0	data_link_protocol_error_status:

8.2.73 uncermsk

Uncorrectable Error Mask.

This register masks uncorrectable errors from being signaled.

Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x150			

Bit	Attr	Default	Description
21:21	RWS	0x0	acs_violation_mask:
20:20	RWS	0x0	unsupported_request_error_mask:
18:18	RWS	0x0	malformed_tlp_mask:
17:17	RWS	0x0	receiver_buffer_overflow_mask:
16:16	RWS	0x0	unexpected_completion_mask:
15:15	RWS	0x0	completer_abort_mask:
14:14	RWS	0x0	completion_time_out_mask:
13:13	RWS	0x0	flow_control_protocol_error_mask:
12:12	RWS	0x0	poisoned_tlp_mask:
5:5	RWS	0x0	surprise_down_error_mask:
4:4	RWS	0x0	data_link_layer_protocol_error_mask:

8.2.74 uncerrsev

Uncorrectable Error Severity.

This register indicates the severity of the uncorrectable errors.



Type: CFG		PortID: N/A			
Bus: 0		Device: 0		Function: 0	
Bus: 0		Device: 1		Function: 0-1	
Bus: 0		Device: 2		Function: 0-3	
Bus: 0		Device: 3		Function: 0-3	
Offset: 0x154					
Bit	Attr	Default	Description		
21:21	RWS	0x0	acs_violation_severity:		
20:20	RWS	0x0	unsupported_request_error_severity:		
18:18	RWS	0x1	malformed_tlp_severity:		
17:17	RWS	0x1	receiver_buffer_overflow_severity:		
16:16	RWS	0x0	unexpected_completion_severity:		
15:15	RWS	0x0	completer_abort_severity:		
14:14	RWS	0x0	completion_time_out_severity:		
13:13	RWS	0x1	flow_control_protocol_error_severity:		
12:12	RWS	0x0	poisoned_tlp_severity:		
5:5	RWS	0x1	surprise_down_error_severity:		
4:4	RWS	0x1	data_link_protocol_error_severity:		

8.2.75 corerrsts

Correctable Error Status.

This register identifies the status of the correctable errors that have been detected by the PCI Express port.

Type: CFG		PortID: N/A			
Bus: 0		Device: 0		Function: 0	
Bus: 0		Device: 1		Function: 0-1	
Bus: 0		Device: 2		Function: 0-3	
Bus: 0		Device: 3		Function: 0-3	
Offset: 0x158					
Bit	Attr	Default	Description		
13:13	RW1CS	0x0	advisory_non_fatal_error_status:		
12:12	RW1CS	0x0	replay_timer_time_out_status:		
8:8	RW1CS	0x0	replay_num_rollover_status:		
7:7	RW1CS	0x0	bad_dllp_status:		
6:6	RW1CS	0x0	bad_tlp_status:		
0:0	RW1CS	0x0	receiver_error_status:		

8.2.76 corerrmsk

Correctable Error Mask.

This register masks correctable errors from being signaled.



Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x15c			


Bit	Attr	Default	Description
13:13	RWS	0x1	advisory_non_fatal_error_mask:
12:12	RWS	0x0	replay_timer_time_out_mask:
8:8	RWS	0x0	replay_num_rollover_mask:
7:7	RWS	0x0	bad_dllp_mask:
6:6	RWS	0x0	bad_tlp_mask:
0:0	RWS	0x0	receiver_error_mask:

8.2.77 errcap

Advanced Error capabilities and Control Register.

Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x160			

Bit	Attr	Default	Description
8:8	RO	0x0	ecrc_check_enable: N/A for IIO.
7:7	RO	0x0	ecrc_check_capable: N/A for IIO.
6:6	RO	0x0	ecrc_generation_enable: N/A for IIO.
5:5	RO	0x0	ecrc_generation_capable: N/A for IIO.
4:0	ROS_V	0x0	first_error_pointer: The First Error Pointer is a read-only register that identifies the bit position of the first unmasked error reported in the Uncorrectable Error register. In case of two errors happening at the same time, fatal error gets precedence over non-fatal, in terms of being reported as first error. This field is rearmed to capture new errors when the status bit indicated by this field is cleared by software.



8.2.78 hdrlog[0:3]

Header Log 0-3.

This register contains the header log when the first error occurs. Headers of the subsequent errors are not logged.

Type:	CFG	PortID:	N/A
Bus:	0	Device:	0
Bus:	0	Device:	1
Bus:	0	Device:	2
Bus:	0	Device:	3
Offset:	0x164, 0x168, 0x16c, 0x170		
		Function:	0
		Function:	0-1
		Function:	0-3
		Function:	0-3

Bit	Attr	Default	Description
31:0	ROS_V	0x0	hdr: Logs the first DWORD of the header on an error condition.

8.2.79 rperrcmd

Root Port Error Command.

This register controls behavior upon detection of errors.

Type:	CFG	PortID:	N/A
Bus:	0	Device:	0
Bus:	0	Device:	1
Bus:	0	Device:	2
Bus:	0	Device:	3
Offset:	0x174		
		Function:	0
		Function:	0-1
		Function:	0-3
		Function:	0-3

Bit	Attr	Default	Description
2:2	RW	0x0	fatal_error_reporting_enable: Applies to root ports onlyEnable MSIINTx interrupt on fatal errors when set.
1:1	RW	0x0	non_fatal_error_reporting_enable: Applies to root ports onlyEnable interrupt on a non-fatal error when set.
0:0	RW	0x0	correctable_error_reporting_enable: Applies to root ports onlyEnable interrupt on correctable errors when set.

8.2.80 rperrsts

Root Port Error Status.

The Root Error Status register reports status of error Messages (ERR_COR), ERR_NONFATAL, and ERR_FATAL) received by the Root Complex in IIO, and errors detected by the Root Port itself (which are treated conceptually as if the Root Port had sent an error Message to itself). The ERR_NONFATAL and ERR_FATAL Messages are grouped together as uncorrectable. Each correctable and uncorrectable (Non-fatal and Fatal) error source has a first error bit and a next error bit associated with it respectively. When an error is received by a Root Complex, the respective first error bit is set and the Requestor ID is logged in the Error Source Identification register. A set individual error status bit indicates that a particular error category occurred; software may clear an error status by writing a 1 to the respective bit. If software does not clear the first reported error before another error Message is received of the same category



(correctable or uncorrectable), the corresponding next error status bit will be set but the Requestor ID of the subsequent error Message is discarded. The next error status bits may be cleared by software by writing a 1 to the respective bit as well.

Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x178			

Bit	Attr	Default	Description
31:27	RO	0x0	advanced_error_interrupt_message_number: Advanced Error Interrupt Message Number offset between base message data an the MSI message if assigned more than one message number. IIO hardware automatically updates this register to 0x1h if the number of messages allocated to the root port is 2.
6:6	RW1CS	0x0	fatal_error_messages_received: Set when one or more Fatal Uncorrectable error Messages have been received.
5:5	RW1CS	0x0	non_fatal_error_messages_received: Set when one or more Non-Fatal Uncorrectable error Messages have been received.
4:4	RW1CS	0x0	first_uncorrectable_fatal: Set when bit 2 is set (from being clear) and the message causing bit 2 to be set is an ERR_FATAL message.
3:3	RW1CS	0x0	multiple_error_fatal_nonfatal_received: Set when either a fatal or a non-fatal error message is received and Error Fatal/Nonfatal Received is already set, that is, log from the 2nd Fatal or No fatal error message onwards.
2:2	RW1CS	0x0	error_fatal_nonfatal_received: Set when either a fatal or a non-fatal error message is received and this bit is already not set. i.e. log the first error message. Note that when this bit is set bit 3 could be either set or clear.
1:1	RW1CS	0x0	multiple_correctable_error_received: Set when either a correctable error message is received and Correctable Error Received bit is already set, that is, log from the 2nd Correctable error message onwards .
0:0	RW1CS	0x0	correctable_error_received: Set when a correctable error message is received and this bit is already not set, that is, log the first error message.

8.2.81 errsid

Error Source Identification.

Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x17c			

Bit	Attr	Default	Description
31:16	ROS_V	0x0	fatal_non_fatal_error_source_id: Requestor ID of the source when an Fatal or Non Fatal error message is received and the Error Fatal/Nonfatal Received bit is not already set, that is, log ID of the first Fatal or Non Fatal error message. Note that when the root port itself is the cause of the received message (virtual message), then a Source ID of CPUBUSNO0:DevNo:0 is logged into this register.



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x17c		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
15:0	ROS_V	0x0	correctable_error_source_id: Requestor ID of the source when a correctable error message is received and the Correctable Error Received bit is not already set, that is, log ID of the first correctable error message. Note that when the root port itself is the cause of the received message (virtual message), then a Source ID of CPUBUSNO0:DevNo:0 is logged into this register.		

8.2.82 perfctrlsts_0

Performance Control and Status Register 0.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x180		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
20:16	RW	0x18	outstanding_requests_gen1:		
13:8	RW	0x30	outstanding_requests_gen2:		
7:7	RW	0x1	use_allocating_flow_wr: Use Allocating Flows for 'Normal Writes' on VC0 and VCp 1: Use allocating flows for the writes that meet the following criteria. 0: Use non-allocating flows for writes that meet the following criteria. (TPH=0 OR TPHDIS=1 OR (TPH=1 AND Tag=0 AND C1PCTRL[28]=1)) AND (NS=0 OR NoSnoopOpWrEn=0) AND Non-DCA Write Note: VC1/VCm traffic is not impacted by this bit in Dev#0 When allocating flows are used for the above write types, IIO does not send a Prefetch Hint message. Current recommendation for BIOS is to just leave this bit at default of 1b for all but DMI port. For DMI port when operating in DMI mode, this bit must be left at default value and when operating in PCIe mode, this bit should be set by BIOS. Note there is a coupling between the usage of this bit and bits 2 and 3. TPHDIS is bit 0 of this register NoSnoopOpWrEn is bit 3 of this register		
6:6	RW	0x0	vcp_roen_nswr: Only available for Device 0 Function 0.		
5:5	RW	0x0	vcp_nsen_rd: Only available for Device 0 Function 0.		
4:4	RW	0x1	read_stream_interleave_size:		



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x180			
Bit	Attr	Default	Description
3:3	RW	0x0	<p>nosnoopopwren:</p> <p>Enable No-Snoop Optimization on VC0 writes and VCp writes This applies to writes with the following conditions: NS=1 AND (TPH=0 OR TPHDIS=1) 1: Inbound writes to memory with above conditions will be treated as non-coherent (no snoops) writes on Intel QPI 0: Inbound writes to memory with above conditions will be treated as allocating or non-allocating writes, depending on bit 4 in this register.</p> <p>If TPH=1 and TPHDIS=0 then NS is ignored and this bit is ignored VC1/VCm writes are not controlled by this bit since they are always non-snoop and can be no other way. Current recommendation for BIOS is to just leave this bit at default of 0b. Refer to the Transaction Flow chapter in EDS Volume 3 for what needs to be guaranteed at the system/usage model level for BIOS to set this bit.</p>
2:2	RW	0x0	<p>nosnoopoprden:</p> <p>Enable No-Snoop Optimization on VC0 reads and VCp reads This applies to reads with the following conditions: NS=1 AND (TPH=0 OR TPHDIS=1) 1: When the condition is true for a given inbound read request to memory, it will be treated as non-coherent (no snoops) reads on Intel QPI. 0: When the condition is true for a given inbound read request to memory, it will be treated as normal snooped reads from PCIe (which trigger a PCIRdCurrent or DRd.UC on IDI).</p> <p>Notes: If TPH=1 and TPHDIS=0 then NS is ignored and this bit is ignored See Transaction Flow Chapter in EDS Volume 3 for further details. VC1 and VCm reads are not controlled by this bit and those reads are always non-snoop. Current recommendation for BIOS is to just leave this bit at default of 0b. See Transaction Flow Chapter in EDS Volume 3 for what needs to be guaranteed at the system/usage model level for BIOS to set this bit.</p>
1:1	RW	0x0	read_passing_read_disable:
0:0	RW	0x1	read_stream_policy:



8.2.83 perfctrlsts_1

Performance Control and Status Register 1.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x184				

Bit	Attr	Default	Description
9:9	RW	0x0	tphdis: TLP Processing Hint Disable When set, writes or reads with TPH=1, will be treated as if TPH=0. Refer to the Transaction Flow chapter of EDS Volume 3 for details about the flows for the different cases of TPH.
8:8	RW	0x0	dca_reqid_override: DCA Requester ID Override When this bit is set, Requester ID match for DCA writes is bypassed. All writes from the port are treated as DCA writes and the tag field will convey if DCA is enabled or not and the target information.
3:3	RW	0x0	max_read_completion_combine_size:

8.2.84 miscctrlsts_0

MISC Control and Status Register 0.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x188				

Bit	Attr	Default	Description
31:31	RW	0x0	disable_l0s_on_transmitter: When set, IIO never puts its tx in L0s state, even if OS enables it via the Link Control register.
30:30	RW_O	0x1	inbound_io_disable:
29:29	RW	0x1	cfg_to_en: Disables/enables config timeouts, independently of other timeouts.
28:28	RW	0x0	to_dis: Disables timeouts completely.
27:27	RWS	0x0	system_interrupt_only_on_link_bw_management_status: This bit, when set, will disable generating MSI and Intx interrupts on link bandwidth (speed and/or width) and management changes, even if MSI or INTx is enabled i.e. will disable generating MSI or INTx when LNKSTS bits 15 and 14 are set. Whether or not this condition results in a system event like SMI/PMI/CPEI is dependent on whether this event masked or not in the XPCORERRMSK register.



Type: CFG PortID: N/A Bus: 0 Device: 0 Function: 0 Bus: 0 Device: 1 Function: 0-1 Bus: 0 Device: 2 Function: 0-3 Bus: 0 Device: 3 Function: 0-3 Offset: 0x188			
Bit	Attr	Default	Description
9:9	RWS	0x0	dispdspolling: Disables gen2 if timeout happens in polling.cfg.
8:7	RW	0x0	pme2acktoctrl:
6:6	RW	0x0	enable_timeout_for_receiving_pme_to_ack: When set, IIO enables the timeout to receiving the PME_TO_ACK
5:5	RW_V	0x0	send_pme_turn_off_message: When this bit is written with a 1b, IIO sends a PME_TURN_OFF message to the PCIe link. Hardware clears this bit when the message has been sent on the link.
4:4	RW	0x0	enable_system_error_only_for_aer: Applies only to root ports. For Dev#0 in DMI mode, this bit is to be left at default value always. When this bit is set, the PCI Express errors do not trigger an MSI or Intx interrupt, regardless of the whether MSI or INTx is enabled or not. Whether or not PCI Express errors result in a system event like NMI/SMI/PMI/CPEI is dependent on whether the appropriate system error or override system error enable bits are set or not. See section titled PCI Express Error Reporting Specifics in the RAS chapter for details of how this bit interacts with other control bits in signalling errors to the IIO global error reporting logic. When this bit is clear, PCI Express errors are reported via MSI or INTx and/or NMI/SMI/MCA/CPEI. When this bit is clear, and 'System Error on Fatal Error Enable' bit in ROOTCON register is set, then NMI/SMI/MCA is (also) generated for a PCI Express fatal error. Similar behavior for non-fatal and corrected errors.
3:3	RW	0x0	enable_acpi_mode_for_hotplug:
2:2	RW	0x0	enable_acpi_mode_for_pm:
1:1	RW_O	0x0	inbound_configuration_enable:

8.2.85 miscctrlsts_1

MISC Control and Status Register 1.

Type: CFG PortID: N/A Bus: 0 Device: 0 Function: 0 Bus: 0 Device: 1 Function: 0-1 Bus: 0 Device: 2 Function: 0-3 Bus: 0 Device: 3 Function: 0-3 Offset: 0x18c			
Bit	Attr	Default	Description
19:19	RW	0x1	vcm_arb_in_vc1: Only available for Device 0 Function 0.



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x18c		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
18:18	RW	0x0	no_vcm_throttle_in_quiesce: Only available for Device 0 Function 0		
17:17	RW1CS	0x0	locked_read_timed_out: Indicates that a locked read request incurred a completion time-out on PCI Express/DMI		
16:16	RW1C	0x0	received_pme_to_ack: Indicates that IIO received a PME turn off ack packet or it timed out waiting for the packet		
9:9	RW	0x0	override_socketid_in_cplid: For TPH/DCA requests, the Completer ID can be returned with SocketID when this bit is set.		
6:6	RW	0x0	problematic_port_for_lock_flows: This bit is set by BIOS when it knows that this port is connected to a device that creates Posted-Posted dependency on its In-Out queues. Briefly, this bit is set on a link if: IIO lock flows depend on the setting of this bit to treat this port in a special way during the flows. Note that if BIOS is setting up the lock flow to be in the 'Intel QPI compatible' mode, then this bit must be set to 0. Notes: An inbound MSI request can block the posted channel until EOI's are posted to all outbound queues enabled to receive EOI. Because of this, this bit cannot be set unless EOIFD is also set.		
5:5	RW	0x0	disable_mctp_broadcast_to_this_link: When set, this bit will prevent a broadcast MCTP message (w/ Routing Type of 'Broadcast from RC') from being sent to this link.		
4:4	RWS	0x0	formfactor: Indicates what form-factor a particular root port controls 0 - CEM 1 - Express Module This bit is used to interpret bit 6 in the VPP serial stream for the port as either MRL# (CEM) input or EMLSTS# (Express Module) input.		
3:3	RW	0x0	override_system_error_on_pcie_fatal_error_enable: When set, fatal errors on PCI Express (that have been successfully propagated to the primary interface of the port) are sent to the IIO core error logic (for further escalation) regardless of the setting of the equivalent bit in the ROOTCTRL register. When clear, the fatal errors are only propagated to the IIO core error logic if the equivalent bit in ROOTCTRL register is set. For Dev#0 in DMI mode and Dev#3/Fn#0, unless this bit is set, DMI link related fatal errors will never be notified to system software.		



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x18c		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
2:2	RW	0x0	override_system_error_on_pcie_non_fatal_error_enable: When set, non-fatal errors on PCI Express (that have been successfully propagated to the primary interface of the port) are sent to the IIO core error logic (for further escalation) regardless of the setting of the equivalent bit in the ROOTCTRL register. When clear, the non-fatal errors are only propagated to the IIO core error logic if the equivalent bit in ROOTCTRL register is set. For Dev#0 in DMI mode and Dev#3/Fn#0, unless this bit is set, DMI link related non-fatal errors will never be notified to system software.		
1:1	RW	0x0	override_system_error_on_pcie_correctable_error_enable: When set, correctable errors on PCI Express (that have been successfully propagated to the primary interface of the port) are sent to the IIO core error logic (for further escalation) regardless of the setting of the equivalent bit in the ROOTCTRL register. When clear, the correctable errors are only propagated to the IIO core error logic if the equivalent bit in ROOTCTRL register is set. For Dev#0 in DMI mode and Dev#3/Fn#0, unless this bit is set, DMI link related correctable errors will never be notified to system software.		
0:0	RW	0x0	acpi_pme_inten: When set, Assert/Deassert_PMEGPE messages are enabled to be generated when ACPI mode is enabled for handling PME messages from PCI Express. See Power Management Chapter for more details of this bit's usage. When this bit is cleared (from a 1), a Deassert_PMEGPE message is scheduled on behalf of the root port if an Assert_PMEGPE message was sent last from the root port.		

8.2.86 pcie_iou_bif_ctrl

PCIe Port Bifurcation Control.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x190		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0 Function: 0 Function: 0	
Bit	Attr	Default	Description		
3:3	WO	0x0	iou_start_bifurcation: When software writes a 1 to this bit, IIO starts the port 0 bifurcation process. After writing to this bit, software can poll the Data Link Layer link active bit in the LNKSTS register to determine if a port is up and running. Once a port bifurcation has been initiated by writing a 1 to this bit, software cannot initiate any more write-1 to this bit (write of 0 is ok). Notes: That this bit can be written to a 1 in the same write that changes values for bits 2:0 in this register and in that case, the new value from the write to bits 2:0 take effect. This bit always reads a 0b.		



Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0
Bus:	0	Device:	1	Function:	0
Bus:	0	Device:	2	Function:	0
Bus:	0	Device:	3	Function:	0
Offset:	0x190				

Bit	Attr	Default	Description
2:0	RWS RO (Device 0 Function 0)	0x4 0x0 (Device 0 Function 0)	<p>iou_bifurcation_control:</p> <p>To select a IOU bifurcation, software sets this field and then either</p> <p>a) sets bit 3 in this register to initiate training OR</p> <p>b) resets the entire Intel® Xeon® Processor E5 v2 product family and on exit from that reset,</p> <p>CPU will bifurcate the ports per the setting in this field.</p> <p>For Device 1 Function 0:</p> <p>000: x4x4 (operate lanes 7:4 as x4, 3:0 as x4)</p> <p>001: x8</p> <p>For Device 2 and Device 3 Function 0:</p> <p>000: x4x4x4x4 operate lanes 15:12 as x4, 11:8 as x4, 7:4 as x4 and 3:0 as x4</p> <p>001: x4x4x8 operate lanes 15:12 as x4, 11:8 as x4 and 7:0 as x8</p> <p>010: x8x4x4 operate lanes 15:8 as x8, 7:4 as x4 and 3:0 as x4</p> <p>011: x8x8 operate lanes 15:8 as x8, 7:0 as x8</p> <p>100: x16</p> <p>others: Reserved</p> <p>For Device 0 Function 0, read only.</p>

8.2.87 dmictrl

Type:	CFG	PortID:	N/A	Function:	0 (DMI2 Mode)
Bus:	0	Device:	0		
Offset:	0x1a0				

Bit	Attr	Default	Description
63:2	RO	0x0	rsvd:
1:1	RW	0x1	<p>auto_complete_pm:</p> <p>This bit, if set, enables the DMI port to automatically complete PM message handshakes by generating an AckSx or RstWarnAck message down DMI for the following DMI messages received:</p> <p>GoS0 GoS1RW GoS1Temp GoS1Final GoS3 GoS4 GoS5 RstWarn</p> <p>Notes: This is used by pCode to indicate periods of time when it is not ready to accept messages and there is a risk the messages will be lost.</p>



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	
Offset: 0x1a0		Function: 0 (DMI2 Mode)	
Bit	Attr	Default	Description
0:0	RW	0x1	Setting this bit causes IIO to abort all inbound requests on the DMI port. This will be used during specific power state and reset transitions to prevent request from PCH. This bit does not apply in PCI Express mode. Inbound posted requests will be dropped and inbound non-posted requests will be completed with Unsupported Request completion. Completions flowing inbound (from outbound requests) will not be dropped, but will be forwarded normally. This bit will not affect S-state auto-completion, if it is enabled.

8.2.88 dmists

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	
Offset: 0x1a8		Function: 0 (DMI2 Mode)	
Bit	Attr	Default	Description
31:1	RO	0x0	reserved:
0:0	RW1C	0x0	received_cpu_reset_done_ack:

8.2.89 ERRINJCAP

PCI Express Error Injection Capability.

Defines a vendor specific capability for WHEA error injection.

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	
Bus: 0		Device: 1	
Bus: 0		Device: 2	
Bus: 0		Device: 3	
Offset: 0x1d0		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description
31:20	RO	0x250 0x280 (Device 0 Function 0)	nxtptr: Next Capability Offset This field points to the next capability or 0 if there isn't a next capability.
19:16	RO	0x1	capver: Capability Version Set to 2h for this version of the PCI Express specification
15:0	RO	0xb	extcapid: PCI Express Extended Capability ID Vendor Defined Capability

8.2.90 ERRINJHDR

PCI Express Error Injection Capability Header.



Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x1d4			

Bit	Attr	Default	Description
31:20	RO	0xa	vseclen: Vendor Specific Capability Length Indicates the length of the capability structure, including header bytes.
19:16	RO	0x1	vsecrev: Vendor Specific Capability Revision Set to 1h for this version of the WHEA Error Injection logic.
15:0	RO	0x3	vsecid: Vendor Specific ID Assigned for WHEA Error Injection

8.2.91 ERRINJCON

PCI Express Error Injection Control Register.

Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x1d8			

Bit	Attr	Default	Description
2:2	RW	0x0	cause_ctoerr: Cause a Completion Timeout Error When this bit is written to transition from 0 to 1, one and only one error assertion pulse is produced on the error source signal for the given port. This error will appear equivalent to an actual error assertion because this event is OR'd into the existing error reporting structure. To log another error, this bit must be cleared first, before setting again. Leaving this bit in a 1 state does not produce a persistent error condition. Notes: This bit is used for an uncorrectable error test This bit must be cleared by software before creating another event. This bit is disabled by bit 0 of this register
1:1	RW	0x0	cause_rcvrr: Cause a Receiver Error When this bit is written to transition from 0 to 1, one and only one error assertion pulse is produced on the error source signal for the given port. This error will appear equivalent to an actual error assertion because this event is OR'd into the existing error reporting structure. To log another error, this bit must be cleared first, before setting again. Leaving this bit in a 1 state does not produce a persistent error condition. Notes: This bit is used for an correctable error test This bit must be cleared by software before creating another event. This bit is disabled by bit 0 of this register
0:0	RW_O	0x0	errinjdis: Error Injection Disable This bit disables the use of the PCIe error injection bits. Note: This is a write once bit.



8.2.92 ctoctrl

Completion Timeout Control.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x1e0				

Bit	Attr	Default	Description
9:8	RW	0x0	<p>xp_to_pcie_timeout_select:</p> <p>When OS selects a timeout range of 17s to 64s for XP (that affect NP tx issued to the PCIe/DMI) using the root port's DEVCTRL2 register, this field selects the sub-range within that larger range, for additional controllability.</p> <p>00 : 17s-30s 01 : 31s-45s 10 : 46s-64s 11 : Reserved</p>

8.2.93 xpcorerrsts

XP Correctable Error Status

The contents of the next set of registers - XPCORERRSTS, XPCORERRMSK, XPUNCERRSTS, XPUNCERRMSK, XPUNCERRSEV, XPUNCERRPTR - to be defined by the design team based on microarchitecture. The architecture model for error logging and escalation of internal errors is similar to that of PCI Express AER, except that these internal errors never trigger an MSI and are always reported to the system software. Mask bits mask the reporting of an error and severity bit controls escalation to either fatal or non-fatal error to the internal core error logic. Note that internal errors detected in the PCI Express cluster are not dependent on any other control bits for error escalation other than the mask bit defined in these registers. All these registers are sticky.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x200				

Bit	Attr	Default	Description
0:0	RW1CS	0x0	<p>pci_link_bandwidth_changed_status:</p> <p>This bit is set when the logical OR of LNKSTS[15] and LNKSTS[14] goes from 0 to 1.</p>

8.2.94 xpcorerrmsk

XP Correctable Error Mask.



Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x204			

Bit	Attr	Default	Description
0:0	RWS	0x0	pci_link_bandwidth_changed_mask: Masks the BW change event from being propagated to the IIO core error logic as a correctable error

8.2.95 xpuncerrsts

XP Uncorrectable Error Status.

Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x208			

Bit	Attr	Default	Description
9:9	RW1CS	0x0	outbound_poisoned_data: Set when outbound poisoned data (from Intel QPI or peer, write or read completion) is received by this port
8:8	RW1CS	0x0	received_msi_writes_greater_than_a_dword_data:
7:7	RW1CS	0x0	unused7:
6:6	RW1CS	0x0	received_pcie_completion_with_ur_status:
5:5	RW1CS	0x0	received_pcie_completion_with_ca_status:
4:4	RW1CS	0x0	sent_completion_with_unsupported_request:
3:3	RW1CS	0x0	sent_completion_with_completer_abort:
2:2	RW1CS	0x0	unused2:
1:1	RW1CS	0x0	outbound_switch_fifo_data_parity_error_detected:
0:0	RW1CS	0x0	unused0:

8.2.96 xpuncerrmsk

XP Uncorrectable Error Mask.

Type:	CFG	PortID:	N/A	
Bus:	0	Device:	0	Function: 0
Bus:	0	Device:	1	Function: 0-1
Bus:	0	Device:	2	Function: 0-3
Bus:	0	Device:	3	Function: 0-3
Offset:	0x20c			

Bit	Attr	Default	Description
9:9	RWS	0x0	outbound_poisoned_data_mask: Masks signaling of stop and scream condition to the core error logic.
8:8	RWS	0x0	received_msi_writes_greater_than_a_dword_data_mask:



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x20c			

Bit	Attr	Default	Description
7:7	RWS	0x0	unused7:
6:6	RWS	0x0	received_pcie_completion_with_ur_status_mask:
5:5	RWS	0x0	received_pcie_completion_with_ca_status_mask:
4:4	RWS	0x0	sent_completion_with_unsupported_request_mask:
3:3	RWS	0x0	sent_completion_with_completer_abort_mask:
2:2	RWS	0x0	unused2:
1:1	RWS	0x0	outbound_switch_fifo_data_parity_error_detected_mask:
0:0	RWS	0x0	unused0:

8.2.97 xpuncerrsev

XP Uncorrectable Error Severity

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x210			

Bit	Attr	Default	Description
9:9	RWS	0x0	outbound_poisoned_data_severity:
8:8	RWS	0x0	received_msi_writes_greater_than_a_dword_data_severity:
7:7	RWS	0x0	unused7:
6:6	RWS	0x0	received_pcie_completion_with_ur_status_severity:
5:5	RWS	0x0	received_pcie_completion_with_ca_status_severity:
4:4	RWS	0x0	sent_completion_with_unsupported_request_severity:
3:3	RWS	0x0	sent_completion_with_completer_abort_severity:
2:2	RWS	0x0	unused2:
1:1	RWS	0x1	outbound_switch_fifo_data_parity_error_detected_severity:
0:0	RWS	0x0	unused0:



8.2.98 xpuncerrptr

XP Uncorrectable Error Pointer.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x214				

Bit	Attr	Default	Description
4:0	ROS_V	0x0	<p>xp_uncorrectable_first_error_pointer:</p> <p>This field points to which of the unmasked uncorrectable errors happened first. This field is only valid when the corresponding error is unmasked and the status bit is set and this field is rearmed to load again when the status bit indicated to by this pointer is cleared by software from 1 to 0. Value of 0x0 corresponds to bit 0 in XPUNCERRSTS register, value of 0x1 corresponds to bit 1 and so forth.</p>

8.2.99 uncedmask

Uncorrectable Error Detect Status Mask

This register masks PCIe link related uncorrectable errors from causing the associated AER status bit to be set.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x218				

Bit	Attr	Default	Description
21:21	RWS	0x0	acs_violation_detect_mask:
20:20	RWS	0x0	received_an_unsupported_request_detect_mask:
18:18	RWS	0x0	malformed_tlp_detect_mask:
17:17	RWS	0x0	receiver_buffer_overflow_detect_mask:
16:16	RWS	0x0	unexpected_completion_detect_mask:
15:15	RWS	0x0	completer_abort_detect_mask:
14:14	RWS	0x0	completion_time_out_detect_mask:
13:13	RWS	0x0	flow_control_protocol_error_detect_mask:
12:12	RWS	0x0	poisoned_tlp_detect_mask:
5:5	RWS	0x0	surprise_down_error_detect_mask:
4:4	RWS	0x0	data_link_layer_protocol_error_detect_mask:



8.2.100 coredmask

Correctable Error Detect Status Mask

This register masks PCIe link related correctable errors from causing the associated status bit in AER status register to be set.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x21c				

Bit	Attr	Default	Description
13:13	RWS	0x0	advisory_non_fatal_error_detect_mask:
12:12	RWS	0x0	replay_timer_time_out_detect_mask:
8:8	RWS	0x0	replay_num_rollover_detect_mask:
7:7	RWS	0x0	bad_dllp_detect_mask:
6:6	RWS	0x0	bad_tlp_detect_mask:
0:0	RWS	0x0	receiver_error_detect_mask:

8.2.101 rpedmask

Root Port Error Detect Status Mask

This register masks the associated error messages (received from PCIe link and NOT the virtual ones generated internally), from causing the associated status bits in AER to be set.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x220				

Bit	Attr	Default	Description
2:2	RWS	0x0	fatal_error_detected_status_mask:
1:1	RWS	0x0	non_fatal_error_detected_status_mask:
0:0	RWS	0x0	correctable_error_detected_status_mask:

8.2.102 xpuncedmask

XP Uncorrectable Error Detect Mask

This register masks other uncorrectable errors from causing the associated XPUNCERRSTS status bit to be set.



Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x224				

Bit	Attr	Default	Description
9:9	RWS	0x0	outbound_poisoned_data_detect_mask:
8:8	RWS	0x0	received_msi_writes_greater_than_a_dword_data_detect_mask:
7:7	RWS	0x0	unused7:
6:6	RWS	0x0	received_pcie_completion_with_ur_detect_mask:
5:5	RWS	0x0	received_pcie_completion_with_ca_detect_mask:
4:4	RWS	0x0	sent_completion_with_unsupported_request_detect_mask:
3:3	RWS	0x0	sent_completion_with_completer_abort_detect_mask:
2:2	RWS	0x0	unused2:
1:1	RWS	0x0	outbound_switch_fifo_data_parity_error_detect_mask:
0:0	RWS	0x0	unused0:

8.2.103 xpcoredmask

XP Correctable Error Detect Mask

This register masks other correctable errors from causing the associated XPCORERRSTS status bit to be set.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x228				

Bit	Attr	Default	Description
0:0	RWS	0x0	pci_link_bandwidth_changed_detect_mask:

8.2.104 xpglberrsts

XP Global Error Status

This register captures a concise summary of the error logging in AER registers so that sideband system management software can view the errors independent of the main OS that might be controlling the AER errors.



Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x230		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3
Bit	Attr	Default	Description	
2:2	RW1CS	0x0	pcie_aer_correctable_error: A PCIe correctable error (ERR_COR message received from externally or through a virtual ERR_COR message generated internally) was detected anew. Note that if that error was masked in the PCIe AER, it is not reported in this field. Software clears this bit by writing a 1 and at that stage, only 'subsequent' PCIe unmasked correctable errors will set this bit. Conceptually, per the flow of PCI Express Base Spec 2.0 defined Error message control, this bit is set by the ERR_COR message that is enabled to cause a System Error notification. See section titled PCI Express Error Reporting Specifics in the RAS chapter in EDS Volume 3 for details of how this bit interacts with other control/status bits in signalling errors to the IIO global error reporting logic.	
1:1	RW1CS	0x0	pcie_aer_non_fatal_error: A PCIe non-fatal error (ERR_NONFATAL message received from externally or through a virtual ERR_NONFATAL message generated internally) was detected anew. Note that if that error was masked in the PCIe AER, it is not reported in this field. Software clears this bit by writing a 1 and at that stage only 'subsequent' PCIe unmasked non-fatal errors will set this bit again. See section titled PCI Express Error Reporting Specifics in the RAS chapter in EDS Volume 3 for details of how this bit interacts with other control/status bits in signalling errors to the IIO global error reporting logic.	
0:0	RW1CS	0x0	pcie_aer_fatal_error: A PCIe fatal error (ERR_FATAL message received from externally or through a virtual ERR_FATAL message generated internally) was detected anew. Note that if that error was masked in the PCIe AER, it is not reported in this field. Software clears this bit by writing a 1 and at that stage, only 'subsequent' PCIe unmasked fatal errors will set this bit. See section titled PCI Express Error Reporting Specifics in the RAS chapter in EDS Volume 3 for details of how this bit interacts with other control/status bits in signalling errors to the IIO global error reporting logic.	

8.2.105 xpglberrptr

XP Global Error Pointer

Check that the perfmon registers are per "cluster".

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x232		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3
Bit	Attr	Default	Description	
2:0	ROS_V	0x0	xp_cluster_global_first_error_pointer: This field points to which of the 3 errors indicated in the XPGLBERRSTS register happened first. This field is only valid when the corresponding status bit is set and this field is rearmed to load again when the status bit indicated to by this pointer is cleared by software from 1 to 0. Value of 0x0 corresponds to bit 0 in XPGLBERRSTS register, value of 0x1 corresponds to bit 1, and so forth.	



8.2.106 pxp2cap

Secondary PCI Express Extended Capability Header.

Type: CFG		PortID: N/A	
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x250			
Bit	Attr	Default	Description
31:20	RO	0x280	nxtptr: Next Capability Offset. This field contains the offset to the next PCI Express Extended Capability structure or 000h if no other items exist in the linked list of capabilities.
19:16	RW_O	0x1	version: This field is a PCI-SIG defined version number that indicates the version of the Capability structure present.
15:0	RW_O	0x19	id: This field is a PCI SIG defined ID number that indicates the nature and format of the Extended Capability. PCI Express Extended Capability ID for the Secondary PCI Express Extended Capability is 0019h.

8.2.107 Inkcon3

Link Control 3 Register.

Type: CFG		PortID: N/A	
Bus: 0		Device: 1	Function: 0-1
Bus: 0		Device: 2	Function: 0-3
Bus: 0		Device: 3	Function: 0-3
Offset: 0x254			
Bit	Attr	Default	Description
1:1	RW	0x0	Inkeqreqinten: Link Equalization Request Interrupt Enable. When Set, this bit enables the generation of interrupt to indicate that the Link Equalization Request bit has been set.
0:0	RW	0x0	perfeq: Performance Equalization. When this register is 1b and a 1b is written to the 'Link Retrain' register with 'Target Link Speed' set to 8GTs, the Upstream component must perform Transmitter Equalization.



8.2.108 Inerrsts

Lane Error Status Register

Type: CFG Bus: 0 Bus: 0 Bus: 0 Offset: 0x258		PortID: N/A Device: 1 Device: 2 Device: 3		Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
15:0	RW1CS	0x0	lane: A value of 1b in any bit indicates if the corresponding PCIe Express Lane detected lane based error. bit 0 Lane 0 Error Detected bit 1 Lane 1 Error Detected bit 2 Lane 2 Error Detected bit 3 Lane 3 Error Detected bit 4 Lane 4 Error Detected (not used when the link is bifurcated as x4) bit 5 Lane 5 Error Detected (not used when the link is bifurcated as x4) bit 6 Lane 6 Error Detected (not used when the link is bifurcated as x4) bit 7 Lane 7 Error Detected (not used when the link is bifurcated as x4) bit 8 Lane 8 Error Detected (not used when the link is bifurcated as x4 or x8) bit 9 Lane 9 Error Detected (not used when the link is bifurcated as x4 or x8) bit 10 Lane 10 Error Detected (not used when the link is bifurcated as x4 or x8) bit 11 Lane 11 Error Detected (not used when the link is bifurcated as x4 or x8) bit 12 Lane 12 Error Detected (not used when the link is bifurcated as x4 or x8) bit 13 Lane 13 Error Detected (not used when the link is bifurcated as x4 or x8) bit 14 Lane 14 Error Detected (not used when the link is bifurcated as x4 or x8) bit 15 Lane 15 Error Detected (not used when the link is bifurcated as x4 or x8)		

8.2.109 In[0:3]eq

Lane 0 through Lane 3 Equalization Control

Type: CFG Bus: 0 Bus: 0 Bus: 0 Offset: 0x25c, 0x25e, 0x260, 0x262		PortID: N/A Device: 1 Device: 2 Device: 3		Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
14:12	RW_O	0x7	dnrxpreset: Downstream Component Receiver Preset Hint Receiver Preset Hint for Downstream Component with the following encoding. The Upstream component must pass on this value in the EQ TS2'es. 000b: -6 dB 001b: -7 dB 010b: -8 dB 011b: -9 dB 100b: -10 dB 101b: -11 dB 110b: -12 dB 111b: Reserved For a Downstream Component, this field reflects the latest Receiver Preset value requested from the Upstream Component on Lane 0. The default value is 111b.		



Type: CFG		PortID: N/A	
Bus: 0		Device: 1	
Bus: 0		Device: 2	
Bus: 0		Device: 3	
Offset: 0x25c, 0x25e, 0x260, 0x262		Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description
11:8	RW_O	0x8	<p>dntxpreset:</p> <p>Downstream Component Transmitter Preset</p> <p>Transmitter Preset for Downstream Component with the following encoding. The Upstream component must pass on this value in the EQ TS2'es.</p> <p>000b: -6 dB for de-emphasis, 0 dB for preshoot</p> <p>001b: -3.5 dB for de-emphasis, 0 dB for preshoot</p> <p>010b: -6 dB for de-emphasis, -3.5 dB for preshoot</p> <p>011b: -3.5 dB for de-emphasis, -3.5 dB for preshoot</p> <p>100b: -0 dB for de-emphasis, 0 dB for preshoot</p> <p>101b: -0 dB for de-emphasis, -3.5 dB for preshoot</p> <p>Others: reserved</p> <p>For a Downstream Component, this field reflects the latest Transmitter Preset requested from the Upstream Component on Lane 0. The default value is 111b.</p>
6:4	RO	0x7	<p>uprxpreset:</p> <p>Upstream Component Receiver Preset Hint</p> <p>Receiver Preset Hint for Upstream Component. The upstream component uses this hint for receiver equalization. The Root Ports are upstream components. The encodings are defined below.</p> <p>000b: -6 dB</p> <p>001b: -7 dB</p> <p>010b: -8 dB</p> <p>011b: -9 dB</p> <p>100b: -10 dB</p> <p>101b: -11 dB</p> <p>110b: -12 dB</p> <p>111b: reserved</p>
3:0	RW_O	0x8	<p>uptxpreset:</p> <p>Upstream Component Transmitter Preset</p> <p>Transmitter Preset for an Upstream Component. The Root Ports are upstream components. The encodings are defined below.</p> <p>000b: -6 dB for de-emphasis, 0 dB for preshoot</p> <p>001b: -3.5 dB for de-emphasis, 0 dB for preshoot</p> <p>010b: -6 dB for de-emphasis, -3.5 dB for preshoot</p> <p>011b: -3.5 dB for de-emphasis, -3.5 dB for preshoot</p> <p>100b: -0 dB for de-emphasis, 0 dB for preshoot</p> <p>101b: -0 dB for de-emphasis, -3.5 dB for preshoot</p> <p>others: reserved</p>



8.2.110 In[4:7]eq

Lane 4 through Lane 7 Equalization Control

This register is unused when the link is configured at x4 in the bifurcation register.

Type: CFG		PortID: N/A	
Bus: 0		Device: 1	
Bus: 0		Device: 2	
Bus: 0		Device: 3	
Offset: 0x264, 0x266, 0x268, 0x26a		Function: 0-1 Function: 0, 2 Function: 0, 2	
Bit	Attr	Default	Description
14:12	RW_O	0x7	dnrxpreset: Downstream Component Receiver Preset Hint Receiver Preset Hint for Downstream Component with the following encoding. The Upstream component must pass on this value in the EQ TS2'es. 000b: -6 dB 001b: -7 dB 010b: -8 dB 011b: -9 dB 100b: -10 dB 101b: -11 dB 110b: -12 dB 111b: Reserved For a Downstream Component, this field reflects the latest Receiver Preset value requested from the Upstream Component on Lane 0. The default value is 111b.
11:8	RW_O	0x8	dntxpreset: Downstream Component Transmitter Preset Transmitter Preset for Downstream Component with the following encoding. The Upstream component must pass on this value in the EQ TS2'es. 000b: -6 dB for de-emphasis, 0 dB for preshoot 001b: -3.5 dB for de-emphasis, 0 dB for preshoot 010b: -6 dB for de-emphasis, -3.5 dB for preshoot 011b: -3.5 dB for de-emphasis, -3.5 dB for preshoot 100b: -0 dB for de-emphasis, 0 dB for preshoot 101b: -0 dB for de-emphasis, -3.5 dB for preshoot others: reserved For a Downstream Component, this field reflects the latest Transmitter Preset requested from the Upstream Component on Lane 0. The default value is 111b.
6:4	RO	0x7	uprxpreset: Upstream Component Receiver Preset Hint Receiver Preset Hint for Upstream Component. The upstream component uses this hint for receiver equalization. The Root Ports are upstream components. The encodings are defined below. 000b: -6 dB 001b: -7 dB 010b: -8 dB 011b: -9 dB 100b: -10 dB 101b: -11 dB 110b: -12 dB 111b: reserved



Type:	CFG	PortID:	N/A	Function:	0-1
Bus:	0	Device:	1	Function:	0, 2
Bus:	0	Device:	2	Function:	0, 2
Bus:	0	Device:	3	Function:	0, 2
Offset:	0x264, 0x266, 0x268, 0x26a				

Bit	Attr	Default	Description
3:0	RW_O	0x8	uptxpreset: Upstream Component Transmitter Preset Transmitter Preset for an Upstream Component. The Root Ports are upstream components. The encodings are defined below. 000b: -6 dB for de-emphasis, 0 dB for preshoot 001b: -3.5 dB for de-emphasis, 0 dB for preshoot 010b: -6 dB for de-emphasis, -3.5 dB for preshoot 011b: -3.5 dB for de-emphasis, -3.5 dB for preshoot 100b: -0 dB for de-emphasis, 0 dB for preshoot 101b: -0 dB for de-emphasis, -3.5 dB for preshoot others: reserved

8.2.111 In[8:15]eq

Lane 8 though Lane 15 Equalization Control

This register is unused when the link is configured at x4 or x8 in the bifurcation register.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	2	Function:	0
Bus:	0	Device:	3	Function:	0
Offset:	0x26c, 0x26e, 0x270, 0x272, 0x274, 0x276, 0x278, 0x27a				

Bit	Attr	Default	Description
14:12	RW_O	0x7	dnrxpreset: Downstream Component Receiver Preset Hint Receiver Preset Hint for Downstream Component with the following encoding. The Upstream component must pass on this value in the EQ TS2'es. 000b: -6 dB 001b: -7 dB 010b: -8 dB 011b: -9 dB 100b: -10 dB 101b: -11 dB 110b: -12 dB 111b: Reserved For a Downstream Component, this field reflects the latest Receiver Preset value requested from the Upstream Component on Lane 0. The default value is 111b.



Type: CFG		PortID: N/A	
Bus: 0		Device: 2	
Bus: 0		Device: 3	
Offset: 0x26c, 0x26e, 0x270, 0x272, 0x274, 0x276, 0x278, 0x27a		Function: 0	
		Function: 0	
Bit	Attr	Default	Description
11:8	RW_O	0x8	<p>dntxpreset:</p> <p>Downstream Component Transmitter Preset Transmitter Preset for Downstream Component with the following encoding. The Upstream component must pass on this value in the EQ TS2'es.</p> <p>000b: -6 dB for de-emphasis, 0 dB for preshoot 001b: -3.5 dB for de-emphasis, 0 dB for preshoot 010b: -6 dB for de-emphasis, -3.5 dB for preshoot 011b: -3.5 dB for de-emphasis, -3.5 dB for preshoot 100b: -0 dB for de-emphasis, 0 dB for preshoot 101b: -0 dB for de-emphasis, -3.5 dB for preshoot others: reserved</p> <p>For a Downstream Component, this field reflects the latest Transmitter Preset requested from the Upstream Component on Lane 0. The default value is 111b.</p>
6:4	RO	0x7	<p>uprxpreset:</p> <p>Upstream Component Receiver Preset Hint Receiver Preset Hint for Upstream Component. The upstream component uses this hint for receiver equalization. The Root Ports are upstream components. The encodings are defined below.</p> <p>000b: -6 dB 001b: -7 dB 010b: -8 dB 011b: -9 dB 100b: -10 dB 101b: -11 dB 110b: -12 dB 111b: reserved</p>
3:0	RW_O	0x8	<p>uptxpreset:</p> <p>Upstream Component Transmitter Preset Transmitter Preset for an Upstream Component. The Root Ports are upstream components. The encodings are defined below.</p> <p>000b: -6 dB for de-emphasis, 0 dB for preshoot 001b: -3.5 dB for de-emphasis, 0 dB for preshoot 010b: -6 dB for de-emphasis, -3.5 dB for preshoot 011b: -3.5 dB for de-emphasis, -3.5 dB for preshoot 100b: -0 dB for de-emphasis, 0 dB for preshoot 101b: -0 dB for de-emphasis, -3.5 dB for preshoot Others: Reserved</p>



8.2.112 ler_cap

Live Error Recovery Capability.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x280				

Bit	Attr	Default	Description
31:20	RO	0x0	nxtptr: Next Capability Offset. This field points to the next Capability in extended configuration space.
19:16	RO	0x1	capver: Capability Version. Set to 1h for this version of the PCI Express logic.
15:0	RO	0xb	capid: PCI Express Extended CAP_ID. Assigned for advanced error reporting.

8.2.113 ler_hdr

Live Error Recovery Capability Header

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0-1
Bus:	0	Device:	1	Function:	0-3
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x284				

Bit	Attr	Default	Description
31:20	RO	0x18	vseclen: VSEC Length. This field indicates the length of the LER capability in bytes. It includes the capability headers.
19:16	RO	0x3	vsecrev: VSEC revision. Set to 2h for this version of the Live Error Recovery logic.
15:0	RO	0x5	vsecid: Vendor Specific ID. Assigned for Live Error Recovery.



8.2.114 ler_ctrlsts

Live Error Recovery Control and Status: LER is not supported, only Stop and Scream

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x288		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
31:31	RW1CS	0x0	ler_ss_status: Indicates that an error was detected that caused the PCIe port to go into a live error recovery (LER) mode. While in LER mode, the link goes into a LinkDown "Disabled" state and all outbound transactions are aborted (including packets that may have caused the error). This bit cannot be cleared until all the associated unmasked status bits are cleared, or the corresponding LER mask bits are set. Once the unmasked error condition are cleared, then this bit may be cleared by software writing a '1'. The link will retrain into LinkUp state and outbound transactions will no longer be aborted. Also, inbound transactions will also no longer be blocked. A link that is forced into a LinkDown "Disabled" state due to LER does not trigger a "surprise LinkDown" error in the UNCERRSTS register. It should be noted that many PCIe cards will go into internal reset when they receive training sequences that indicate the "Disabled" state.		
30:30	ROS_V	0x0	ler_ss_port_quesced: Indicates when the port has no more pending inbound or outbound packets after the port has entered LER mode. It is used by software to determine when it is safe to clear the LER_SS_Status bit to bring the port out of LER mode.		
29:4	RV	0x0	Reserved:		
3:3	RWS	0x0	ler_ss_inten: If set, causes an INTx or MSI interrupt from the root port (if enabled in the root port) to be generated when LER_SS_Status is set.		
2:2	RWS	0x0	ler_ss_drop_txn: If set, after entering LER subsequent transactions will be dropped as soon as the port configuration allows		
1:1	RWS	0x0	ler_ss_severity: If set, forces the errors that trigger LER mode to be signaled as a correctable error of Severity 0. If cleared, then errors are signaled as Uncorrectable Non-Fatal Severity 1 or Uncorrectable Fatal Severity 2 as specified for the given error.		
0:0	RWS	0x0	ler_ss_enable: When set, allow the LER_SS Status to assert on error. When the status bit is set, the associated root port will go into LER mode. When clear, the LER_SS_Status bit can no longer be set on an error and root port can never go into LER mode. Note: If this bit is cleared when the LER_SS_Status bit is already set, then clearing this bit does not clear the status bit and does not exit LER mode. To exit LER mode, the Status bit must be cleared by software.		



8.2.115 ler_uncerrmsk

Live Error Recovery Uncorrectable Error Mask

This register masks uncorrectable errors from being signaled as LER events.

Type:	CFG	PortID:	N/A		
Bus:	0	Device:	0	Function:	0
Bus:	0	Device:	1	Function:	0-1
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x28c				

Bit	Attr	Default	Description
21:21	RWS	0x0	acs_violation_mask:
20:20	RWS	0x0	unsupported_request_error_mask:
18:18	RWS	0x0	malformed_tlp_mask:
17:17	RWS	0x0	receiver_buffer_overflow_mask:
16:16	RWS	0x0	unexpected_completion_mask:
15:15	RWS	0x0	completer_abort_mask:
14:14	RWS	0x0	completion_time_out_mask:
13:13	RWS	0x0	flow_control_protocol_error_mask:
12:12	RWS	0x0	poisoned_tlp_mask:
5:5	RWS	0x0	surprise_down_error_mask:
4:4	RWS	0x0	data_link_layer_protocol_error_mask:

8.2.116 ler_xpuncerrmsk

Live Error Recovery XP Uncorrectable Error Mask.

Type:	CFG	PortID:	N/A		
Bus:	0	Device:	0	Function:	0
Bus:	0	Device:	1	Function:	0-1
Bus:	0	Device:	2	Function:	0-3
Bus:	0	Device:	3	Function:	0-3
Offset:	0x290				

Bit	Attr	Default	Description
9:9	RWS	0x0	outbound_poisoned_data_mask: Masks signaling of stop and scream condition to the core error logic
6:6	RWS	0x0	received_pcie_completion_with_ur_status_mask:
5:5	RWS	0x0	received_pcie_completion_with_ca_status_mask:
4:4	RWS	0x0	sent_completion_with_ur_mask:
3:3	RWS	0x0	sent_completion_with_ca_mask:



8.2.117 0-1ler_rpermsk

Live Error Recovery Root Port Error Mask.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x294		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0-1 Function: 0-3 Function: 0-3	
Bit	Attr	Default	Description		
6:6	RWS	0x0	fatal_error_message_received_mask: Masks LER response to Fatal Error Messages received		
5:5	RWS	0x0	non_fatal_error_message_received_mask: Masks LER response to Non-Fatal Error Messages received		

8.2.118 xppmdl[0:1]

XP PM Data Low Bits

This is the performance monitor counter. This counter is reset at the beginning of a sample period unless pre-loaded with a sample value. Therefore, the counter can cause an early overflow condition with values loaded into the register.

Type: CFG Bus: 0 Bus: 0 Bus: 0 Bus: 0 Offset: 0x480, 0x484		PortID: N/A Device: 0 Device: 1 Device: 2 Device: 3		Function: 0 Function: 0 Function: 0 Function: 0	
Bit	Attr	Default	Description		
31:0	RW_V	0x0	pm_data_counter_low_value: PM data counter low value Low order bits [31:0] for PM data counter[1:0].		



8.2.119 xppmcl[0:1]

XP PM Compare Low Bits

The value of PMD is compared to the value of PMC. If PMD is greater than PMC, this status is reflected in the PERFCN register and/or on the GE[3:0] as selected in the Event Status Output field of the PMR register.

Type:	CFG	PortID:	N/A
Bus:	0	Device:	0
Bus:	0	Device:	1
Bus:	0	Device:	2
Bus:	0	Device:	3
Function:	0	Function:	0
Function:	0	Function:	0
Function:	0	Function:	0
Function:	0	Function:	0
Offset:	0x488, 0x48c		

Bit	Attr	Default	Description
31:0	RW_V	0xffffffff	pm_compare_low_value: PM compare low value Low order bits [31:0] for PM compare register [1:0].

8.2.120 xppmdh

XP PM Data High Bits

This register contains the high nibbles from each of the PMD 36-bit counter register.

Type:	CFG	PortID:	N/A
Bus:	0	Device:	0
Bus:	0	Device:	1
Bus:	0	Device:	2
Bus:	0	Device:	3
Function:	0	Function:	0
Function:	0	Function:	0
Function:	0	Function:	0
Function:	0	Function:	0
Offset:	0x490		

Bit	Attr	Default	Description
11:8	RW_V	0x0	high_nibble_pex_counter1_value: High Nibble PEX Counter1 value High order bits [35:32] of the 36-bit PM Data1 register.
3:0	RW_V	0x0	high_nibble_pex_counter0_value: High Nibble PEX Counter0 value High order bits [35:32] of the 36-bit PM Data0 register.



8.2.121 xppmch

XP PM Compare High Bits

This register contains the high nibbles from each of the PMC 36-bit compare registers.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0
Bus:	0	Device:	1	Function:	0
Bus:	0	Device:	2	Function:	0
Bus:	0	Device:	3	Function:	0
Offset:	0x492				

Bit	Attr	Default	Description
11:8	RW_V	0xf	high_nibble_pex_compare1_value: High Nibble PEX Compare1 value High order bits [35:32] of the 36-bit PM Compare1 register.
3:0	RW_V	0xf	high_nibble_pex_compare0_value: High Nibble PEX Compare0 value High order bits [35:32] of the 36-bit PM Compare0 register.

8.2.122 xppmr[0:1]

XP PM Response Control

The PMR register controls operation of its associated counter, and provides overflow or max compare status information.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	0	Function:	0
Bus:	0	Device:	1	Function:	0
Bus:	0	Device:	2	Function:	0
Bus:	0	Device:	3	Function:	0
Offset:	0x494, 0x498				

Bit	Attr	Default	Description
31:31	RV	0x0	Reserved
30:30	RW	0x0	not_greater_than_comparison: Not greater than comparison 0: PMC will compare a greater than function. When clear the perfmon status will assert when the PMD is greater than the PMC. 1: PMC will compare with NOT (greater than) function. When set the perfmon status will assert when the PMD is less than or equal to the PMC.
29:29	RW	0x0	force_pmd_counter_to_add_zero_to_input: Force PMD counter to add zero to input This feature is used with the queue measurement bus. When this bit is set the value on the queue measurement bus is added to zero so the result in PMD will always reflect the value from the queue measurement bus. 0: Do not add zero. Normal PerfMon operation. 1: Add zero with input queue bus.
28:28	RW	0x0	latched_count_enable_select: Latched Count Enable Select 0: Normal PM operation. Use CENS as count enable. 1: Use Latched count enable from queue empty events



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0
Bus: 0		Device: 2	Function: 0
Bus: 0		Device: 3	Function: 0
Offset: 0x494, 0x498			
Bit	Attr	Default	Description
27:27	RW	0x0	<p>reset_pulse_enable:</p> <p>Reset Pulse Enable Setting this bit will select a pulsed version of the reset signal source in the reset block. 0: Normal reset signaling 1: Select a pulsed reset from the reset signal sources.</p>
26:24	RV	0x0	Reserved
23:22	RW	0x0	dfx_byte_lane_selection_for_perfmon:
21:21	RW	0x0	local_dft_event_select:
20:19	RW	0x0	<p>event_group_selection:</p> <p>Event Group Selection Selects which event register to use for performance monitoring.00: Bus events (XPMEVL,H register) and also Resource Utilizations (XP_PMER Registers) when all XP_PMEH and XP_PMEL Registers are set to '0'. That is, when monitoring PMER events, all PMEV events are to be deselected; when monitoring PMEV events, all PMER events are to be deselected. 01: Reserved 10: Queue measurement (in the XPPMER register). Note: To enable FIFO queue histogramming write bit field CNTMD = '11' and select queues in the XPPMER register. 11: Reserved</p>
18:17	RW	0x0	<p>count_event_select:</p> <p>Count Event Select Selects the condition for incrementing the performance monitor counter. 00: Event source selected by PMEV{L,H} 01: Partner event status (max compare or overflow) 10: All clocks when enabled 11: Reserved</p>
16:16	RW	0x0	<p>event_polarity_invert:</p> <p>Event Polarity Invert This bit inverts the polarity of the conditioned event signal. 0: No inversion 1: Invert the polarity of the conditioned event signal</p>



Type: CFG		PortID: N/A	
Bus: 0	Device: 0	Function: 0	
Bus: 0	Device: 1	Function: 0	
Bus: 0	Device: 2	Function: 0	
Bus: 0	Device: 3	Function: 0	
Offset: 0x494, 0x498			
Bit	Attr	Default	Description
7:6	RW	0x0	<p>compare_mode:</p> <p>Compare Mode</p> <p>This field defines how the PMC (compare) register is to be used.</p> <p>00: compare mode disabled (PMC register not used)</p> <p>01: max compare only: The PMC register value is compared with the counter value. If the counter value is greater then the Compare Status (CMPSTAT) will be set.</p> <p>10: max compare with update of PMC at end of sample: The PMC register value is compared with the counter value, and if the counter value is greater, the PMC register is updated with the counter value. Note, the Compare Status field is not affected in this mode.</p> <p>11: Reserved</p>
5:5	RW	0x0	<p>pm_status_signal_output:</p> <p>PM Status Signal Output</p> <p>0: Level output from status/overflow signals.</p> <p>1: Pulsed output from status/overflow signals.</p>
4:3	RW	0x0	<p>cto:</p> <p>PerfMon Trigger Output</p> <p>This field selects what the signal is communicated to the chip's event logic structure.</p> <p>00: No cluster trigger output from PerfMons or header match.</p> <p>01: PM Status.</p> <p>10: PM Event Detection.</p> <p>11: Reserved</p>
2:2	RW1C	0x0	<p>compare_status:</p> <p>Compare Status</p> <p>This status bit captures a count compare event. The Compare Status field can be programmed to allow this bit to be driven to Global Event (GE[3:0]) signals which will then distribute the event to the debug logic.</p> <p>0: no event</p> <p>1: count compare - PMD counter greater than PMC register when in compare mode.</p> <p>This bit remains set once an event is reported even though the original condition is no longer valid. Writing a logic '1' clears the bit.</p>
1:1	RW1C	0x0	<p>overflow_status_bit:</p> <p>Overflow Status Bit</p> <p>This status bit captures the overflow event from the PMD counter. This bit remains set once an event is reported even though the original condition is no longer valid. Writing a logic '1' clears the bit.</p>
0:0	RW	0x0	<p>counter_reset:</p> <p>Counter Reset</p> <p>Setting this bit resets the PMD counter, the associated adder storage register and the count mode state latch (see bits CNTMD) to the default state. It does not change the state of this PMR register, the event selections, or the value in the compare register. Note: This bit must be cleared by software, otherwise the counters remain in reset. There is also a reset bit in the PERFCN register which clears all PM registers including the PMR.</p>



8.2.123 xppmevl[0:1]

XP PM Events Low

Selections in this register correspond to fields within the PCIe header. Each field selection is logically combined according to the match equation. The qualifications for fields in this register are listed below. It should be noted that the bit selections are generic for packet and for either inbound or outbound direction. Because of this, there will be bit fields that do not make sense. For these packet matching situations the user should select "Either" which acts as a don't care for the match equation

PCIe PerfMon Match Equation

$PMEV\ Match = ((IO_Cfg_Write_event + IO_Cfg_Read_event + Mem_Write_event + Mem_Read_event + Trusted_write_event + Trusted_read_event + General_event) \& INOUTBND) + GESEL$

$IO_Cfg_Write_event = (REQCMP[0] \& CMPR[1] \& RDWR[1] \& DATALEN \& (TTYP[2] + (TTYP[1] \& CFGTYP)))$

$IO_Cfg_Read_event = (REQCMP[0] \& CMPR[1] \& RDWR[0] \& DATALEN \& (TTYP[2] + (FMTTYP[1] \& CFGTYP)))$

$Mem_Write_event = (REQCMP[0] \& CMPR[0] \& RDWR[1] \& DATALEN \& TTYP[3] \& LOCK \& EXTADDR \& SNATTR)$

Note: An outbound memory write does not have a snoop attribute as an inbound memory write has. So the user should set SNATTR="11" for outbound memory write transaction event counting.

$Mem_Read_event = (REQCMP[0] \& CMPR[1] \& RDWR[0] \& DATALEN \& ((TTYP[3] \& LOCK \& EXTADDR \& SNATTR) + TTYP[2] + (TTYP[1] \& CFGTYP)))$

Note: For outbound memory reads there is no concept of issuing a snoop cycle. The user should select SNATTR="11" for either snoop attribute.

$Msg_event = (TTYP[0] \& DND)$

$(INOUTBND[0] \& (MatchEq) + (IOBND[1] \& (MatchEq)))$

Setting both bits in INOUTBND is acceptable however the performance data gathered will not be accurate since once one header can be counted at a time.

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0
Bus: 0		Device: 2	Function: 0
Bus: 0		Device: 3	Function: 0
Offset: 0x49c, 0x4a0			
Bit	Attr	Default	Description
31:30	RW	0x0	data_or_no_data_attribute: Data or no data attribute x1: Request/completion/message with data 1x: Request/completion/message packet without data



Type: CFG		PortID: N/A	
Bus: 0	Device: 0	Function: 0	
Bus: 0	Device: 1	Function: 0	
Bus: 0	Device: 2	Function: 0	
Bus: 0	Device: 3	Function: 0	
Offset: 0x49c, 0x4a0			
Bit	Attr	Default	Description
29:28	RW	0x0	snoop_attribute: Snoop Attribute x1: No snoop required 1x: Snoop required 11: Either
27:26	RW	0x0	request_or_completion_packet_selection: Request or Completion Packet Selection x1: Request packet 1x: Completion packet 11: Either
25:24	RW	0x0	read_or_write_selection: Read or Write Selection x1: Read 1x: Write 11: Either
23:22	RW	0x0	request_packet_only: Completion Required x1: No completion required 1x: Completion required 11: Either
21:20	RW	0x0	lock_attribute_selection: Lock Attribute Selection x1: No lock 1x: Lock 11: Either
19:18	RW	0x0	extended_addressing_header: Extended Addressing Header x1: 32b addressing 1x: 64b addressing 11: Either
17:16	RW	0x0	cfgtyp: Configuration Type x1: Type 0 1x: Type 1 11: Either
15:11	RW	0x0	fmttyp: Transaction Type Encoding 1_xxxx: Trusted x_1xxx: Memory x_x1xx: IO x_xx1x: Configuration x_xxx1: Messages 1_1111: Any transaction type



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0
Bus: 0		Device: 2	Function: 0
Bus: 0		Device: 3	Function: 0
Offset: 0x49c, 0x4a0			
Bit	Attr	Default	Description
10:4	RW	0x0	data_length: Data Length 1xx_xxxx: (129 to 256 bytes) x1x_xxxx: (65 to 128 bytes) xx1_xxxx: (33 to 64 bytes) xxx_1xxx: (17 to 32 bytes) xxx_x1xx: (9 to 16 bytes) xxx_xx1x: (0 to 8 bytes) xxx_xxx1: 0 bytes, used for a special zero length encoded packets 111_1111: Any Data length
3:0	RW	0x0	for_completion_packet_or_message_encoding_for_request_packet: Completion Status. 1xxx: Completer abort x1xx: Configuration request retry status (only used for inbound completions) xx1x: Unsupported request xxx1: Successful completion 1111: Any status The completion feature is not supported . This field should not be used by software (reserved): write 0 always, read return random.

8.2.124 xppmehv[0:1]

XP PM Events High

Selections in this register correspond to fields within the PEX packet header. Each field selection is ANDed with all other fields in this register including the XPPMEVL except for the Global Event signals. These signals are OR'ed with any event in the XPPMEVL and enables for debug operations requiring the accumulation of specific debug signals. The qualifications for fields in this register are as follows:

Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0
Bus: 0		Device: 2	Function: 0
Bus: 0		Device: 3	Function: 0
Offset: 0x4a4, 0x4a8			
Bit	Attr	Default	
31:8	RV	0x0	Reserved



Type: CFG		PortID: N/A	
Bus: 0	Device: 0	Function: 0	
Bus: 0	Device: 1	Function: 0	
Bus: 0	Device: 2	Function: 0	
Bus: 0	Device: 3	Function: 0	
Offset: 0x4a4, 0x4a8			
Bit	Attr	Default	
7:2	RW	0x0	<p>global_event_selection:</p> <p>Global Event Selection</p> <p>Selects which GE[3:0] is used for event counting. This field is OR'd with other fields in this register. The GEs cannot be qualified with other PerfMon signals. If more than 1 GE is selected then the resultant event is the OR between each GE. However, properly counting Global Event based on design, XP PM Response Control Register bit [13:11] CENS must be set to choose GE[3:0] and also bit[18:17] CNTEVSEL must be set to 2'b10.</p> <p>1x_xxxx: GE[5] x1_xxxx: GE[4] xx_1xxx: GE[3] xx_x1xx: GE[2] xx_xx1x: GE[1] xx_xxx1: GE[0]</p>
1:0	RW	0x0	<p>inbound_or_outbound_selection</p> <p>Inbound or Outbound Selection</p> <p>Selects which path to count transactions. 1x: Outbound x1: Inbound (from PCI bus) 11: Either</p>

8.2.125 xppmer[0:1]

XP PM Resource Event.

This register is used to select queuing structures for measurement. Use of this event register is mutually exclusive with the XPPMEV{L,H} registers. The Event Register Select field in the PMR register must select this register for to enable monitoring operations of the queues.

Type: CFG		PortID: N/A	
Bus: 0	Device: 0	Function: 0	
Bus: 0	Device: 1	Function: 0	
Bus: 0	Device: 2	Function: 0	
Bus: 0	Device: 3	Function: 0	
Offset: 0x4ac, 0x4b0			
Bit	Attr	Default	Description
20:17	RW	0x0	<p>xp_resource_assignment:</p> <p>This selects which PCI Express links are being monitored. A logic 1 selects that PCIe link for monitoring.</p> <p>1000: Select NA / PXP6 / PXP10 (depending on device number) for monitoring.</p> <p>0100: Select PXP2 / PXP5 / PXP9 (depending on device number) for monitoring.</p> <p>0010: Select PXP1 / PXP4 / PXP8 (depending on device number) for monitoring.</p> <p>0001: Select PXP / PXP3 / PXP7 (depending on device number) for monitoring.</p>



Type: CFG		PortID: N/A	
Bus: 0		Device: 0	Function: 0
Bus: 0		Device: 1	Function: 0
Bus: 0		Device: 2	Function: 0
Bus: 0		Device: 3	Function: 0
Offset: 0x4ac, 0x4b0			
Bit	Attr	Default	Description
16:13	RW	0x0	<p>link_send_utilization:</p> <p>This level signal that is active when the link could send a packet or an idle. The choices are a logic idle flit, a link layer packet, or a transaction layer packet. The user can count the number of clocks that the link is not active by inverting this signal in the event conditioning logic (PMR.EVPOLINV = 1).The selection listed combines all the links for clarity. If the user is operating on XP3 then the bit field selects Links[6:3] only.</p> <p>0000: No event selected 1000: Link 6 (xp3), link 10 (xp7), reserved, reserved 0100: Link 5 (xp3), link 9 (xp7), reserved, reserved 0010: Link 4 (xp3), link 8 (xp7), port 2 (xp0), reserved 0001: Link 3 (xp3), link 7 (xp7), link 1 (xp0), link 0 (xp0 -DMI)</p>
7:6	RW	0x0	flowcntrclass:
5:0	RW	0x0	<p>qbussel:</p> <p>Queue Measurement Bus Select: This field selects a queue to monitor. These queues are connected the QueueMeasBus that is derived from the difference in the write and read pointers.</p> <p>000000: No queues selected --- 010001: xp0, xp3, xp7 - Inbound data payload 010010: xp1, xp4, xp8 - Inbound data payload 010100: xp2, xp5, xp9 - Inbound data payload 011000: NA, xp6, xp10 - Inbound data payload 100001: xp0, xp3, xp7 - Outbound data payload 100010: xp1, xp4, xp8 - Outbound data payload 100100: xp2, xp5, xp9 - Outbound data payload 101000: NA, xp6, xp10 - Outbound data payload Others: Reserved NA: not applicable.</p>

8.3 Device 0 Function 0 Region DMIRCBAR

DMI Root Complex Registers Block (RCRB). This block is mapped into memory space, using register DMIRCBAR [Device 0:Function 0, offset 0x50].

Register Name	Offset	Size
dmivc0rcap	0x10	32
dmivc0rctl	0x14	32
dmivc0rst	0x1a	16
dmivc1rcap	0x1c	32
dmivc1rctl	0x20	32
dmivc1rst	0x26	16
dmivcprcap	0x28	32
dmivcprctl	0x2c	32
dmivcprst	0x32	16
dmivmrcap	0x34	32



Register Name	Offset	Size
dmivcmrctl	0x38	32
dmivcmrsts	0x3e	16
dmivc1cdtthrottle	0x60	32
dmivpcdtthrottle	0x64	32
dmivmcdtthrottle	0x68	32

8.3.1 dmivcOrcap

DMI VCO Resource Capability

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x10		Function: 0	
Bit	Attr	Default	Description
31:16	RO	0x0	maxtimeslots: Max Time Slots
15:15	RO	0x0	rejsnpt: Reject Snoop Transactions 0: Transactions with or without the No Snoop bit set within the TLP header are allowed on this VC. 1: Any transaction without the No Snoop bit set within the TLP header will be rejected as an Unsupported Request.
14:0	RV	0x0	Reserved

8.3.2 dmivcOrctl

DMI VCO Resource Control

Controls the resources associated with PCI Express Virtual Channel 0.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x14		Function: 0	
Bit	Attr	Default	Description
31:31	RO	0x1	vc0e: Virtual Channel 0 Enable For VCO this is hardwired to 1 and read only as VCO can never be disabled.
30:27	RV	0x0	Reserved
26:24	RO	0x0	vc0id: Virtual Channel 0 ID Assigns a VC ID to the VC resource. For VCO this is hardwired to 0 and read only.
23:8	RV	0x0	Reserved



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x14		Function: 0	
Bit	Attr	Default	Description
7:7	RO	0x0	tc7vc0m: Traffic Class 7 / Virtual Channel 0 Map Traffic Class 7 is always routed to VCm.
6:1	RW-LB	0x3f	tcvc0m: Traffic Class / Virtual Channel 0 Map Indicates the TCs (Traffic Classes) that are mapped to the VC resource. Bit locations within this field correspond to TC values. For example, when bit 6 is set in this field, TC6 is mapped to this VC resource. When more than one bit in this field is set, it indicates that multiple TCs are mapped to the VC resource. In order to remove one or more TCs from the TC/VC Map of an enabled VC, software must ensure that no new or outstanding transactions with the TC labels are targeted at the given Link.
0:0	RO	0x1	tc0vc0m: Traffic Class 0 / Virtual Channel 0 Map Traffic Class 0 is always routed to VC0.

8.3.3 dmivc0rst

DMI VC0 Resource Status.

Reports the Virtual Channel specific status.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x1a		Function: 0	
Bit	Attr	Default	Description
15:2	RV	0x0	Reserved
1:1	RO-V	0x1	vc0np: Virtual Channel 0 Negotiation Pending 0: The VC negotiation is complete. 1: The VC resource is still in the process of negotiation (initialization or disabling). This bit indicates the status of the process of Flow Control initialization. It is set by default on Reset, as well as whenever the corresponding Virtual Channel is Disabled or the Link is in the DL_Down state. It is cleared when the link successfully exits the FC_INIT2 state. BIOS Requirement: Before using a Virtual Channel, software must check whether the VC Negotiation Pending fields for that Virtual Channel are cleared in both Components on a Link.
0:0	RV	0x0	Reserved



8.3.4 dmivc1rcap

DMI VC1 Resource Capability

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x1c		Function: 0	
Bit	Attr	Default	Description
15:15	RO	0x1	rejsnpt: Reject Snoop Transactions 0: Transactions with or without the No Snoop bit set within the TLP header are allowed on this VC. 1: Any transaction without the No Snoop bit set within the TLP header will be rejected as an Unsupported Request.
14:0	RV	0x0	Reserved

8.3.5 dmivc1rctl

DMI VC1 Resource Control

Controls the resources associated with PCI Express Virtual Channel 1.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x20		Function: 0	
Bit	Attr	Default	Description
31:31	RW-LB	0x0	vc1e: Virtual Channel 1 Enable 0: Virtual Channel is disabled. 1: Virtual Channel is enabled. See exceptions below. Software must use the VC Negotiation Pending bit to check whether the VC negotiation is complete. When VC Negotiation Pending bit is cleared, a 1 read from this VC Enable bit indicates that the VC is enabled (Flow Control Initialization is completed for the PCI Express port). A 0 read from this bit indicates that the Virtual Channel is currently disabled. BIOS Requirement: 1. To enable a Virtual Channel, the VC Enable bits for that Virtual Channel must be set in both Components on a Link. 2. To disable a Virtual Channel, the VC Enable bits for that Virtual Channel must be cleared in both Components on a Link. 3. Software must ensure that no traffic is using a Virtual Channel at the time it is disabled. 4. Software must fully disable a Virtual Channel in both Components on a Link before re-enabling the Virtual Channel.
30:27	RV	0x0	Reserved
26:24	RW-LB	0x1	vc1id: Virtual Channel 1 ID Assigns a VC ID to the VC resource. Assigned value must be non-zero. This field can not be modified when the VC is already enabled.
23:8	RV	0x0	Reserved
7:7	RO	0x0	tc7vc1m: Traffic Class 7/ Virtual Channel 1 Map Traffic Class 7 is always routed to VCm.



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x20		Function: 0	
Bit	Attr	Default	Description
6:1	RW-LB	0x0	<p>tcvc1m:</p> <p>Traffic Class / Virtual Channel 1 Map</p> <p>Indicates the TCs (Traffic Classes) that are mapped to the VC resource. Bit locations within this field correspond to TC values. For example, when bit 6 is set in this field, TC6 is mapped to this VC resource. When more than one bit in this field is set, it indicates that multiple TCs are mapped to the VC resource. In order to remove one or more TCs from the TC/VC Map of an enabled VC, software must ensure that no new or outstanding transactions with the TC labels are targeted at the given Link.</p>
0:0	RO	0x0	<p>tc0vc1m:</p> <p>Traffic Class 0 / Virtual Channel 0 Map</p> <p>Traffic Class 0 is always routed to VC0.</p>

8.3.6 dmivc1rst

DMI VC1 Resource Status

Reports the Virtual Channel specific status.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x26		Function: 0	
Bit	Attr	Default	Description
15:2	RV	0x0	Reserved
1:1	RO-V	0x1	<p>vc1np:</p> <p>Virtual Channel 1 Negotiation Pending</p> <p>0: The VC negotiation is complete. 1: The VC resource is still in the process of negotiation (initialization or disabling).</p> <p>This bit indicates the status of the process of Flow Control initialization. It is set by default on Reset, as well as whenever the corresponding Virtual Channel is Disabled or the Link is in the DL_Down state.</p> <p>It is cleared when the link successfully exits the FC_INIT2 state.</p> <p>BIOS Requirement: Before using a Virtual Channel, software must check whether the VC Negotiation Pending fields for that Virtual Channel are cleared in both Components on a Link.</p>
0:0	RV	0x0	Reserved



8.3.7 dmivcprcap

DMI VCP Resource Capability

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x1a		Function: 0	
Bit	Attr	Default	Description
15:15	RO	0x0	rejsnpt: Reject Snoop Transactions 0: Transactions with or without the No Snoop bit set within the TLP header are allowed on this VC.1: Any transaction without the No Snoop bit set within the TLP header will be rejected as an Unsupported Request.
14:0	RV	0x0	Reserved

8.3.8 dmivcprctl

DMI VCP Resource Control

Controls the resources associated with the DMI Private Channel (VCp).

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x1a		Function: 0	
Bit	Attr	Default	Description
31:31	RW-LB	0x0	vcpe: Virtual Channel Private Enable 0: Virtual Channel is disabled. 1: Virtual Channel is enabled. See exceptions below. Software must use the VC Negotiation Pending bit to check whether the VC negotiation is complete. When VC Negotiation Pending bit is cleared, a 1 read from this VC Enable bit indicates that the VC is enabled (Flow Control Initialization is completed for the PCI Express port). A 0 read from this bit indicates that the Virtual Channel is currently disabled. BIOS Requirement: 1. To enable a Virtual Channel, the VC Enable bits for that Virtual Channel must be set in both Components on a Link. 2. To disable a Virtual Channel, the VC Enable bits for that Virtual Channel must be cleared in both Components on a Link. 3. Software must ensure that no traffic is using a Virtual Channel at the time it is disabled. 4. Software must fully disable a Virtual Channel in both Components on a Link before re-enabling the Virtual Channel.
30:27	RV	0x0	Reserved
26:24	RW-LB	0x2	vcpid: Virtual Channel Private ID Assigns a VC ID to the VC resource. This field can not be modified when the VC is already enabled. No private VCs are precluded by hardware and private VC handling is implemented the same way as non-private VC handling.
23:8	RV	0x0	Reserved



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x1a		Function: 0	
Bit	Attr	Default	Description
7:7	RO	0x0	tc7vcpm: Traffic Class 7 / Virtual Channel 0 Map Traffic Class 7 is always routed to VCm.
6:1	RW-LB	0x0	tcvcpm: Traffic Class / Virtual Channel private Map Indicates the TCs (Traffic Classes) that are mapped to the VC resource. Bit locations within this field correspond to TC values. For example, when bit 6 is set in this field, TC6 is mapped to this VC resource. When more than one bit in this field is set, it indicates that multiple TCs are mapped to the VC resource. In order to remove one or more TCs from the TC/VC Map of an enabled VC, software must ensure that no new or outstanding transactions with the TC labels are targeted at the given Link.
0:0	RO	0x0	tc0vcpm: Traffic Class 0 / Virtual Channel Private Map Traffic Class 0 is always routed to VC0.

8.3.9 dmivcprsts

DMI VCP Resource Status

Reports the Virtual Channel specific status.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x32		Function: 0	
Bit	Attr	Default	Description
15:2	RV	0x0	Reserved
1:1	RO-V	0x1	vcpnp: Virtual Channel Private Negotiation Pending 0: The VC negotiation is complete. 1: The VC resource is still in the process of negotiation (initialization or disabling). This bit indicates the status of the process of Flow Control initialization. It is set by default on Reset, as well as whenever the corresponding Virtual Channel is Disabled or the Link is in the DL_Down state. It is cleared when the link successfully exits the FC_INIT2 state. BIOS Requirement: Before using a Virtual Channel, software must check whether the VC Negotiation Pending fields for that Virtual Channel are cleared in both Components on a Link.
0:0	RV	0x0	Reserved



8.3.10 dmivcmrcap

DMI VCM Resource Capability

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x34		Function: 0	
Bit	Attr	Default	Description
31:16	RV	0x0	Reserved
15:15	RO	0x1	rejsnpt: Reject Snoop Transactions 0: Transactions with or without the No Snoop bit set within the TLP header are allowed on this VC. 1: Any transaction without the No Snoop bit set within the TLP header will be rejected as an Unsupported Request.
14:0	RV	0x0	Reserved

8.3.11 dmivcmrctl

DMI VCM Resource Control

Controls the resources associated with PCI Express Virtual Channel 0.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x38		Function: 0	
Bit	Attr	Default	Description
31:31	RW-LB	0x0	vcme: Virtual Channel M Enable 0: Virtual Channel is disabled. 1: Virtual Channel is enabled. See exceptions below. Software must use the VC Negotiation Pending bit to check whether the VC negotiation is complete. When VC Negotiation Pending bit is cleared, a 1 read from this VC Enable bit indicates that the VC is enabled (Flow Control Initialization is completed for the PCI Express port). A 0 read from this bit indicates that the Virtual Channel is currently disabled. BIOS Requirement: 1. To enable a Virtual Channel, the VC Enable bits for that Virtual Channel must be set in both Components on a Link. 2. To disable a Virtual Channel, the VC Enable bits for that Virtual Channel must be cleared in both Components on a Link. 3. Software must ensure that no traffic is using a Virtual Channel at the time it is disabled. 4. Software must fully disable a Virtual Channel in both Components on a Link before re-enabling the Virtual Channel.
30:27	RV	0x0	Reserved
26:24	RW-LB	0x0	vcmid: VCm ID
23:8	RV	0x0	Reserved
7:7	RO	0x1	tc7vcpm: Traffic Class 7/ Virtual Channel 0 Map Traffic Class 7 is always routed to VCm.
6:1	RO	0x0	tcvcmm: Traffic Class / Virtual Channel M Map No other traffic class is mapped to VCM



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x38		Function: 0	
Bit	Attr	Default	Description
0:0	RO	0x0	tc0vcmm: Traffic Class 0 Virtual Channel Map

8.3.12 dmivimrst

DMI VCM Resource Status

Reports the Virtual Channel specific status.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x3e		Function: 0	
Bit	Attr	Default	Description
15:2	RV	0x0	Reserved
1:1	RO-V	1b	vcmdp: Virtual Channel M Negotiation Pending 0: The VC negotiation is complete. 1: The VC resource is still in the process of negotiation (initialization or disabling). This bit indicates the status of the process of Flow Control initialization. It is set by default on Reset, as well as whenever the corresponding Virtual Channel is Disabled or the Link is in the DL_Down state. It is cleared when the link successfully exits the FC_INIT2 state. BIOS Requirement: Before using a Virtual Channel, software must check whether the VC Negotiation Pending fields for that Virtual Channel are cleared in both Components on a Link.
0:0	RV	0x0	Reserved

8.3.13 dmivc1cdtthrottle

DMI VC1 Credit Throttle

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x60		Function: 0	
Bit	Attr	Default	Description
31:24	RWS	0x0	prd: Posted Request Data VC1 Credit Withhold Number of VC1 Posted Data credits to withhold from being reported or used.
23:22	RV	0x0	Reserved
21:16	RWS	0x0	prh: Posted Request Header VC1 Credit Withhold Number of VC1 Posted Request credits to withhold from being reported or used.
15:8	RWS	0x0	nprd: Non-Posted Request Data VC1 Credit Withhold Number of VC1 Non-Posted Data credits to withhold from being reported or used.
7:6	RV	0x0	Reserved



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x60		Function: 0	
Bit	Attr	Default	Description
5:0	RWS	0x0	nprh: Non-Posted Request Header VC1 Credit Withhold Number of VC1 Non-Posted Request credits to withhold from being reported or used.

8.3.14 dmivcpdtthrottle

DMI VCp Credit Throttle

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x64		Function: 0	
Bit	Attr	Default	Description
31:24	RWS	0x0	prd: Posted Request Data VCp Credit Withhold Number of VCp Posted Data credits to withhold from being reported or used.
23:22	RV	0x0	Reserved
21:16	RWS	0x0	prh: Posted Request Header VCp Credit Withhold Number of VCp Posted Request credits to withhold from being reported or used.
15:8	RWS	0x0	nprd: Non-Posted Request Data VCp Credit Withhold Number of VCp Non-Posted Data credits to withhold from being reported or used.
7:6	RV	0x0	Reserved
5:0	RWS	0x0	nprh: Non-Posted Request Header VCp Credit Withhold Number of VCp Non-Posted Request credits to withhold from being reported or used.

8.3.15 dmivcmdtthrottle

DMI VCm Credit Throttle

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x68		Function: 0	
Bit	Attr	Default	Description
31:24	RWS	0x0	prd: Posted Request Data VCm Credit Withhold Number of VCm Posted Data credits to withhold from being reported or used.
23:22	RV	0x0	Reserved



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 0	
Offset: 0x68		Function: 0	
Bit	Attr	Default	Description
21:16	RWS	0x0	prh: Posted Request Header VCm Credit Withhold Number of VCm Posted Request credits to withhold from being reported or used.
15:8	RWS	0x0	nprd: Non-Posted Request Data VCm Credit Withhold Number of VCm Non-Posted Data credits to withhold from being reported or used.
7:6	RV	0x0	Reserved
5:0	RWS	0x0	nprh: Non-Posted Request Header VCm Credit Withhold Number of VCm Non-Posted Request credits to withhold from being reported or used.

8.4 Device 4 Function 0-7

Crystal Beach DMA Registers.

Register Name	Offset	Size	Function
vid	0x0	16	0-7
did	0x2	16	0-7
pcicmd	0x4	16	0-7
pcists	0x6	16	0-7
rid	0x8	8	0-7
ccr	0x9	24	0-7
clsr	0xc	8	0-7
hdr	0xe	8	0-7
cb_bar	0x10	64	0-7
svid	0x2c	16	0-7
sdid	0x2e	16	0-7
capptr	0x34	8	0-7
intl	0x3c	8	0-7
intpin	0x3d	8	0-7
devcfg	0x60	16	0
msixcapid	0x80	8	0-7
msixnxtptr	0x81	8	0-7
msixmsgctl	0x82	16	0-7
tableoff_bir	0x84	32	0-7
pbaoff_bir	0x88	32	0-7
capid	0x90	8	0-7
nextptr	0x91	8	0-7
expcap	0x92	16	0-7




Register Name	Offset	Size	Function
devcap	0x94	32	0-7
devcon	0x98	16	0-7
devsts	0x9a	16	0-7
devcap2	0xb4	32	0-7
devcon2	0xb8	16	0-7
pmcap	0xe0	32	0-7
pmcsr	0xe4	32	0-7
dmauncerrsts	0x148	32	0
dmauncerrmsk	0x14c	32	0
dmauncerrsev	0x150	32	0
dmauncerrptr	0x154	8	0
dmaglberrptr	0x160	8	0
chanerr_int	0x180	32	0-7
chanerrmsk_int	0x184	32	0-7
chanerrsev_int	0x188	32	0-7
chanerrptr	0x18c	8	0-7

8.4.1 vid

Type:	CFG	PortID:	N/A
Bus:	0	Device:	4
Offset:	0x0	Function:	0-7
Bit	Attr	Default	Description
15:0	RO	0x8086	vendor_identification_number: The value is assigned by PCI-SIG to Intel.

8.4.2 did

Type:	CFG	PortID:	N/A
Bus:	0	Device:	4
Offset:	0x2	Function:	0-7
Bit	Attr	Default	Description
15:0	RO	0xe20 (Function 0) 0xe21 (Function 1) 0xe22 (Function 2) 0xe23 (Function 3) 0xe24 (Function 4) 0xe25 (Function 5) 0xe26 (Function 6) 0xe27 (Function 7)	device_identification_number: Device ID values vary from function to function. Bits 15:8 are equal to 0x0E.



8.4.3 pcicmd

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x4		Function: 0-7	
Bit	Attr	Default	Description
10:10	RW	0x0	intx_interrupt_disable: 1
9:9	RO	0x0	fast_back_to_back_enable: Not applicable to PCI Express and is hardwired to 0
8:8	RO	0x0	serre: 1
7:7	RO	0x0	idsel_stepping_wait_cycle_control: Not applicable to internal devices. Hardwired to 0.
6:6	RO	0x0	perre: 1
5:5	RO	0x0	vga_palette_snoop_enable: Not applicable to internal devices. Hardwired to 0.
4:4	RO	0x0	mwie: 1
3:3	RO	0x0	sce: 1
2:2	RW	0x0	bme: 1
1:1	RW	0x0	mse: 1
0:0	RO	0x0	iose: 1

8.4.4 pcists

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x6		Function: 0-7	
Bit	Attr	Default	Description
15:15	RW1C	0x0	dpe: 1
14:14	RO	0x0	sse: 1
13:13	RO	0x0	rma: 1
12:12	RO	0x0	rta: 1
11:11	RW1C	0x0	sta: 1
10:9	RO	0x0	devsel_timing: Not applicable to PCI Express. Hardwired to 0.
8:8	RW1C	0x0	mdpe: 1



Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x6		Function: 0-7	
Bit	Attr	Default	Description
7:7	RO	0x0	fast_back_to_back: Not applicable to PCI Express. Hardwired to 0.
5:5	RO	0x0	pci66mhz_capable: Not applicable to PCI Express. Hardwired to 0.
4:4	RO	0x1	capabilities_list: This bit indicates the presence of a capabilities list structure
3:3	RO_V	0x0	intxsts: 1

8.4.5 rid

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x8		Function: 0-7	
Bit	Attr	Default	Description
7:0	RO_V	0x0	revision_id: Reflects the Uncore Revision ID after reset. Reflects the Compatibility Revision ID after BIOS writes 0x69 to any RID register in any Intel® Xeon® Processor E5 v2 product family function. Implementation Note: Read and write requests from the host to any RID register in any Intel® Xeon® Processor E5 v2 product family function are re-directed to the IIO cluster. Accesses to the CCR field are also redirected due to DWORD alignment. It is possible that JTAG accesses are direct, so will not always be redirected.

8.4.6 ccr

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x9		Function: 0-7	
Bit	Attr	Default	Description
23:16	RO_V	0x8	base_class: Generic Device
15:8	RO_V	0x80	sub_class: Generic Device
7:0	RO_V	0x0	register_level_programming_interface: Set to 00h for all non-APIC devices.



8.4.7 clsr

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0xc		Function: 0-7	
Bit	Attr	Default	Description
7:0	RW	0x0	cacheline_size: This register is set as RW for compatibility reasons only. Cacheline size is always 64B.

8.4.8 hdr

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0xe		Function: 0-7	
Bit	Attr	Default	Description
7:7	RO	0x1	multi_function_device: This bit defaults to 1b since all these devices are multi-function
6:0	RO	0x0	configuration_layout: This field identifies the format of the configuration header layout. It is Type 0 for all these devices. The default is 00h, indicating a 'endpoint device'.

8.4.9 cb_bar

Crystal Beach Base Address Register.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x10		Function: 0-7	
Bit	Attr	Default	Description
63:14	RW	0x0	bar: This marks the 16 KB aligned 64-bit base address for memory-mapped registers of CB-DMA. Through the rest of the CSPEC, the BAR register in the 8 functions will be referenced with a logical name of CB_BAR[0:7]. Note that accesses to registers pointed to by the CB_BAR, via message channel or JTAG mini-port are not gated by the Memory Space Enable (MSE) bit in the PCICMD register of the particular function. I.E. accesses via these two paths (which are used for internal ucode/pcode and JTAG) to the CB_BAR registers are honored regardless of the setting of MSE bit
3:3	RO	0x0	prefetchable: The DMA registers are not prefetchable.
2:1	RO	0x2	type: The DMA registers is 64-bit address space and can be placed anywhere within the addressable region of the system.
0:0	RO	0x0	memory_space: This Base Address Register indicates memory space.



8.4.10 svid

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x2c		Function: 0-7	
Bit	Attr	Default	Description
15:0	RW_O	0x8086	vendor_identification_number: 1

8.4.11 sdid

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x2e		Function: 0-7	
Bit	Attr	Default	Description
15:0	RW_O	0x0	subsystem_identification_number: 1

8.4.12 capptr

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x34		Function: 0-7	
Bit	Attr	Default	Description
7:0	RO	0x80	capability_pointer: Points to the first capability structure for the device which is the PCIe capability.

8.4.13 intl

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x3c		Function: 0-7	
Bit	Attr	Default	Description
7:0	RW	0x0	interrupt_line: NA for these devices



8.4.14 intpin

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x3d		Function: 0-7	
Bit	Attr	Default	Description
7:0	RW_O	0x1 (Function 0) 0x2 (Function 1) 0x3 (Function 2) 0x4 (Function 3) 0x1 (Function 4) 0x2 (Function 5) 0x3 (Function 6) 0x4 (Function 7)	cb_intpin0: (Function 0) cb_intpin1: (Function 1) cb_intpin2: (Function 2) cb_intpin3: (Function 3) cb_intpin4: (Function 4) cb_intpin5: (Function 5) cb_intpin6: (Function 6) cb_intpin7: (Function 7) 1

8.4.15 devcfg

This DEVCFG is for Function 0 only

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x60		Function: 0	
Bit	Attr	Default	Description
15:12	RWS	0x0	numrd_xorgalois: This register controls how many CL-size memory read requests for XOR with Galois Field Multiply Descriptor Operations that the DMA engine can have outstanding to main memory. Setting this field to 0h will allow maximum number of reads to be outstanding. Setting this to a value other than 0h (max 15 or Fh) will allow only that many memory reads to be outstanding.
11:11	RW_O	0x0	f1extop_diden: When set, this bit switches in the Function 1 Device ID that are typically used in storage applications. When clear, the function 1 DID remains at the default value associated with applications (for example, networking). This bit should be written by BIOS prior to enumeration.
10:10	RW_O	0x0	f0extop_diden: When set, this bit switches in the Function 0 Device ID that are typically used in storage applications. When clear, the function 0 DID remains at the default value associated with applications (e.g., networking). This bit should be written by BIOS prior to enumeration.
9:9	RWS	0x0	enable_no_snoop: This bit is akin to the NoSnoop enable bit in the PCI Express capability register, only that this bit is controlled by bios rather than OS. When set, the no snoop optimization is enabled (provided the equivalent bit in the PCI Express DEVCON register is set) on behalf of CB DMA otherwise it is not. Notes: Due to severe performance degradation, it is not recommended that this bit be set except in debug mode.
8:8	RWS	0x0	RSVD



Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x60		Function: 0	
Bit	Attr	Default	Description
7:4	RWS	0x0	numrd: This register controls how many CL-size memory read requests that the DMA engine can have outstanding to main memory. Setting this field to 0h will allow maximum number of reads to be outstanding. Setting this to a value other than 0h (max 15 or Fh) will allow only that many memory reads to be outstanding.
3:0	RWS	0xf	numrfo: This register controls how many RFOs the DMA engine can have outstanding to main memory. Setting this field to 0h will allow maximum number of RFOs to be outstanding. Setting this to a value other than 0h (max 15 or Fh) will allow only that many RFOs to be outstanding.

8.4.16 msixcapid


MSI-X Capability ID.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x80		Function: 0-7	
Bit	Attr	Default	Description
7:0	RO	0x11	cb_msixcapid: Assigned by PCI-SIG for MSI-X (CB DMA)

8.4.17 msixnxtptr

MSI-X Next Pointer.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x81		Function: 0-7	
Bit	Attr	Default	Description
7:0	RO	0x90	cb_msixnxtptr: This field is set to 90h for the next capability list (PCI Express capability structure) in the chain.



8.4.18 msixmsgctl

MSI-X Message Control.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x82		Function: 0-7	
Bit	Attr	Default	Description
15:15	RW	0x0	msi_x_enable: Software uses this bit to select between MSI-X or INTx method for signaling interrupts from the DMA 0: INTx method is chosen for DMA interrupts 1: MSI-X method is chosen for DMA interrupts
14:14	RW	0x0	function_mask: If 1, the 1 vector associated with the dma is masked, regardless of the per-vector mask bit state. If 0, the vector's mask bit determines whether the vector is masked or not. Setting or clearing the MSI-X function mask bit has no effect on the state of the per-vector Mask bit.
10:0	RO	0x0	table_size: Indicates the MSI-X table size which for IIO is 1, encoded as a value of 0h.

8.4.19 tableoff_bir

MSI-X Table Offset and BAR Indicator.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x84		Function: 0-7	
Bit	Attr	Default	Description
31:3	RO	0x400	table_offset: MSI-X Table Structure is at offset 8K from the CB BAR address. See "MSI-X Lower Address Registers (MSGADDR)" for the start of details relating to MSI-X registers.
2:0	RO	0x0	table_bir: CB DMA BAR is at offset 10h in the DMA config space and hence this register is 0.



8.4.20 pbaoff_bir

Type:	CFG	PortID:	N/A
Bus:	0	Device:	4
Offset:	0x88	Function:	0-7
Bit	Attr	Default	Description
31:3	RO	0x600	table_offset: MSI-X PBA Structure is at offset 12K from the CB BAR address. See xref for details.
2:0	RO	0x0	table_bir: CB DMA BAR is at offset 10h in the DMA config space and hence this register is 0.

8.4.21 capid

The PCI Express Capability List register enumerates the PCI Express Capability structure in the PCI 3.0 configuration space

Type:	CFG	PortID:	N/A
Bus:	0	Device:	4
Offset:	0x90	Function:	0-7
Bit	Attr	Default	Description
7:0	RO	0x10	capability_id: Provides the PCI Express capability ID assigned by PCI-SIG.

8.4.22 nextptr

The PCI Express Capability List register enumerates the PCI Express Capability structure in the PCI 3.0 configuration space

Type:	CFG	PortID:	N/A
Bus:	0	Device:	4
Offset:	0x91	Function:	0-7
Bit	Attr	Default	Description
7:0	RO	0xe0	next_ptr: This field is set to the PCI PM capability.



8.4.23 **expcap**

The PCI Express Capabilities register identifies the PCI Express device type and associated capabilities

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x92		Function: 0-7	
Bit	Attr	Default	Description
13:9	RO	0x0	interrupt_message_number: N/A
8:8	RO	0x0	slot_implemented: N/A
7:4	RO	0x9	device_port_type: This field identifies the type of device. It is set to for the DMA to indicate root complex integrated endpoint device.
3:0	RO	0x2	capability_version: This field identifies the version of the PCI Express capability structure. Set to 2h for PCI Express and DMA devices for compliance with the extended base registers.

8.4.24 **devcap**

The PCI Express Device Capabilities register identifies device specific information for the device.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x94		Function: 0-7	
Bit	Attr	Default	Description
28:28	RWS_O	0x0	f1r_supported:
27:26	RO	0x0	captured_slot_power_limit_scale: Does not apply to CB DMA
25:18	RO	0x0	captured_slot_power_limit_value: Does not apply to CB DMA
15:15	RO	0x1	role_based_error_reporting: IIO is 1.1 compliant and so supports this feature
14:14	RO	0x0	power_indicator_present_on_device: Does not apply to CB DMA
13:13	RO	0x0	attention_indicator_present: Does not apply to CB DMA
12:12	RO	0x0	attention_button_present: Does not apply to CB DMA
11:9	RO	0x0	endpoint_i1_acceptable_latency: N/A



Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x94		Function: 0-7	
Bit	Attr	Default	Description
8:6	RO	0x0	endpoint_ios_acceptable_latency: N/A
5:5	RO	0x0	extended_tag_field_supported:
4:3	RO	0x0	phantom_functions_supported: CB DMA does not support phantom functions.
2:0	RO	0x0	max_payload_size: CB DMA supports max 128B on writes to PCI Express

8.4.25 devcon

The PCI Express Device Control register controls PCI Express specific capabilities parameters associated with the device.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x98		Function: 0-7	
Bit	Attr	Default	Description
15:15	RW	0x0	initiate_flr: CB DMA does a reset of that function only per the FLR ECN. This bit always returns 0 when read and a write of 0 has no impact
14:12	RO	0x0	max_read_request_size: N/A to CB DMA since it does not issue tx on PCIe
11:11	RW	0x1	enable_no_snoop: For CB DMA, when this bit is clear, all DMA transactions must be snooped. When set, DMA transactions to main memory can utilize No Snoop optimization under the guidance of the device driver.
10:10	RO	0x0	auxiliary_power_management_enable: Not applicable to CB DMA
9:9	RO	0x0	phantom_functions_enable: Not applicable to CB DMA since it never uses phantom functions as a requester.
8:8	RO	0x0	extended_tag_field_enable:
7:5	RO	0x0	max_payload_size: N/A for CB DMA



Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x98		Function: 0-7	
Bit	Attr	Default	Description
4:4	RW	0x0	enable_relaxed_ordering: For most parts, writes from CB DMA are relaxed ordered, except for DMA completion writes. But the fact that CB DMA writes are relaxed ordered is not very useful except when the writes are also non-snooped. If the writes are snooped, relaxed ordering does not provide any particular advantage based on IIO uArch. But when writes are non-snooped, relaxed ordering is required to get good BW and this bit is expected to be set. If this bit is clear, NS writes will get terrible performance.
3:3	RO	0x0	unsupported_request_reporting_enable: N/A for CB DMA
2:2	RO	0x0	fatal_error_reporting_enable: N/A for CB DMA
1:1	RO	0x0	non_fatal_error_reporting_enable: N/A for CB DMA
0:0	RO	0x0	correctable_error_reporting_enable: N/A for CB DMA

8.4.26 devsts

The PCI Express Device Status register provides information about PCI Express device specific parameters associated with the device

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x9a		Function: 0-7	
Bit	Attr	Default	Description
5:5	RO	0x0	transactions_pending: 1: indicates that the CB DMA device has outstanding Non-Posted Request which it has issued either towards main memory, which have not been completed. 0: CB DMA reports this bit cleared only when all Completions for any outstanding Non-Posted Requests it owns have been received.
4:4	RO	0x0	aux_power_detected: Does not apply to IIO
3:3	RO	0x0	unsupported_request_detected: N/A for CB DMA
2:2	RO	0x0	fatal_error_detected: N/A for CB DMA
1:1	RO	0x0	non_fatal_error_detected: N/A for CB DMA



Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x9a		Function: 0-7	
Bit	Attr	Default	Description
0:0	RO	0x0	correctable_error_detected: N/A for CB DMA

8.4.27 devcap2

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0xb4		Function: 0-7	
Bit	Attr	Default	Description
4:4	RO	0x1	completion_timeout_disable_supported:
3:0	RO	0x0	completion_timeout_values_supported: Not Supported

8.4.28 devcon2

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0xb8		Function: 0-7	
Bit	Attr	Default	Description
4:4	RW	0x0	completion_timeout_disable:
3:0	RO	0x0	completion_timeout_value:

8.4.29 pmcap

Power Management Capability.

The PM Capabilities Register defines the capability ID, next pointer and other power management related support. The following PM registers /capabilities are added for software compliance.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0xe0		Function: 0-7	
Bit	Attr	Default	Description
31:27	RO	0x0	RSVD
26:26	RO	0x0	d2_support: IOxAPIC does not support power management state D2.
25:25	RO	0x0	d1_support: IOxAPIC does not support power management state D1.



Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0xe0		Function: 0-7	
Bit	Attr	Default	Description
24:22	RO	0x0	aux_current:
21:21	RO	0x0	device_specific_initialization:
19:19	RO	0x0	pme_clock: This field is hardwired to 0h as it does not apply to PCI Express.
18:16	RWS_O	0x3	version: This field is set to 3h (PM 1.2 compliant) as version number. Bit is RW-O to make the version 2h incase legacy OS'es have any issues.
15:8	RO	0x0	next_capability_pointer: This is the last capability in the chain and hence set to 0.
7:0	RO	0x1	capability_id: Provides the PM capability ID assigned by PCI-SIG.

8.4.30 pmcsr

Power Management Control and Status.

This register provides status and control information for PM events in the PCI Express port of the IIO.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0xe4		Function: 0-7	
Bit	Attr	Default	Description
31:24	RO	0x0	data: Not relevant for IOxAPIC
23:23	RO	0x0	bus_power_clock_control_enable: Not relevant for IOxAPIC
22:22	RO	0x0	b2_b3_support: Not relevant for IOxAPIC
15:15	RO	0x0	pme_status: Not relevant for IOxAPIC
14:13	RO	0x0	data_scale: Not relevant for IOxAPIC
12:9	RO	0x0	data_select: Not relevant for IOxAPIC
8:8	RO	0x0	pme_enable: Not relevant for IOxAPIC




Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0xe4		Function: 0-7	
Bit	Attr	Default	Description
3:3	RO	0x1	no_soft_reset: Indicates IOxAPIC does not reset its registers when transitioning from D3hot to D0.
1:0	RW_V	0x0	power_state: This 2-bit field is used to determine the current power state of the function and to set a new power state as well. 00: D0 01: D1 (not supported by IOAPIC) 10: D2 (not supported by IOAPIC) 11: D3_hot If Software tries to write 01 or 10 to this field, the power state does not change from the existing power state which is either (D0 or D3_hot) and nor do these bits[1:0] change value. When in D3_hot state, IOxAPIC will a) respond to only Type 0 configuration transactions targeted at the device's configuration space, when in D3_hot state c) will not respond to memory i.e. D3hot state is equivalent to MSE , accesses to MBAR region note: ABAR region access still go through in D3_hot state, if it enabled d) will not generate any MSI writes

8.4.31 dmauncerrsts

DMA Cluster Uncorrectable Error Status.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x148		Function: 0	
Bit	Attr	Default	Description
12:12	RW1CS	0x0	syndrome: Multiple errors
10:10	RW1CS	0x0	read_address_decode_error_status:
7:7	RW1CS	0x0	rd_cmpl_header_error_status:
4:4	RW1CS	0x0	RSVD
3:3	RW1CS	0x0	dma_internal_hw_parity_error_status:
2:2	RW1CS	0x0	received_poisoned_data_from_dp_status:



8.4.32 dmauncerrmsk

DMA Cluster Uncorrectable Error Mask.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x14c		Function: 0	
Bit	Attr	Default	Description
12:12	RWS	0x0	syndrome: Multiple errors
10:10	RWS	0x0	read_address_decode_error_mask:
7:7	RWS	0x0	rd_cmpl_header_error_mask:
4:4	RWS	0x0	cfg_reg_parity_error_mask:
3:3	RWS	0x0	dma_internal_hw_parity_error_mask:
2:2	RWS	0x0	received_poisoned_data_from_dp_mask:

8.4.33 dmauncerrsev

DMA Cluster Uncorrectable Error Severity.

This register controls severity of uncorrectable DMA unit errors between fatal and non-fatal.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x150		Function: 0	
Bit	Attr	Default	Description
12:12	RWS	0x0	syndrome: Multiple errors
10:10	RWS	0x0	read_address_decode_error_severity:
7:7	RWS	0x1	rd_cmpl_header_error_severity:
4:4	RWS	0x1	cfg_reg_parity_error_severity:
3:3	RWS	0x1	dma_internal_hw_parity_error_severity:
2:2	RWS	0x0	received_poisoned_data_from_dp_severity:



8.4.34 dmauncerrptr

DMA Cluster Uncorrectable Error Pointer.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x154		Function: 0	
Bit	Attr	Default	Description
4:0	ROS_V	0x0	uncerrptr: Points to the first unmasked uncorrectable error logged in the DMAUNCERRSTS register. This field is only valid when the corresponding error is unmasked and the status bit is set and this register is rearmed to load again once the error pointed by this field in the uncorrectable error status register is cleared. Value of 0x0 corresponds to bit 0 in DMAUNCERRSTS register, value of 0x1 corresponds to bit 1 etc.

8.4.35 dmaglberrptr

DMA Cluster Global Error Pointer.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x160		Function: 0	
Bit	Attr	Default	Description
3:0	ROS_V	0x0	global_error_pointer: Points to one of 8 possible sources of uncorrectable errors – DMA channels 0-7. The DMA channel errors are logged in CHANERRx_INT registers. This register is only valid when the register group pointed to by this register has at least one unmasked error status bit set and this register is rearmed to load again once all the unmasked uncorrectable errors in the source pointed to by this field are cleared. Value of 0x0 corresponds to channel#0, value of 0x1 corresponds to channel#1, and value of 0x7 corresponds to channel#7

8.4.36 chanerr_int

Internal DMA Channel Error Status Registers.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x180		Function: 0-7	
Bit	Attr	Default	Description
18:18	RW1CS (Function 0-1) RO (Function 2-7)	0x0	descnterr: (Function 0-1) The hardware sets this bit when it encounters a base descriptor that requires an extended descriptor (such as an XOR with 8 sources), but DMACount indicates that the Base descriptor is the last descriptor that can be processed. Reserved. (Function 2-7)
17:17	RW1CS (Function 0-1) RO (Function 2-7)	0x0	xorqerr: The hardware sets this bit when the Q validation part of the XOR with Galois Field Multiply Validate operation fails. Reserved. (Function 2-7)
16:16	RW1CS	0x0	crc_xorp_err: The hardware sets this bit when a CRC Test operation or XOR Validity operation fails or when the P validation part of the XOR with Galois Field Multiply Validate operation fails.



Type: CFG		Port ID: N/A	
Bus: 0		Device: 4	
Offset: 0x180		Function: 0-7	
Bit	Attr	Default	Description
15:15	RO	0x0	unaffil_err: Unaffiliated Error. IIO never sets this bit
14:14	RO	0x0	unused:
13:13	RW1CS	0x0	int_cfg_err: Interrupt Configuration Error. The DMA channel sets this bit indicating that the interrupt registers were not configured properly when the DMA channel attempted to generate an interrupt e.g. interrupt address is not 0xFEE.
12:12	RW1CS	0x0	cmp_addr_err: Completion Address Error. The DMA channel sets this bit indicating that the completion address register was configured to an illegal address or has not been configured.
11:11	RW1CS	0x0	desc_len_err: Descriptor Length Error. The DMA channel sets this bit indicating that the current transfer has an illegal length field value. When this bit has been set, the address of the failed descriptor is in the Channel Status register.
10:10	RW1CS	0x0	desc_ctrl_err: Descriptor Control Error. The DMA channel sets this bit indicating that the current transfer has an illegal control field value. When this bit has been set, the address of the failed descriptor is in the Channel Status register.
9:9	RW1CS	0x0	wr_data_err: Write Data Error. The DMA channel sets this bit indicating that the current transfer has encountered an error while writing the destination data. This error could be because of an internal ram error in the write queue that stores the write data before being written to main memory. When this bit has been set, the address of the failed descriptor is in the Channel Status register.
8:8	RW1CS	0x0	rd_data_err: Read Data Error. The DMA channel sets this bit indicating that the current transfer has encountered an error while accessing the source data. This error could be a read data that is received poisoned. When this bit has been set, the address of the failed descriptor is in the Channel Status register.
7:7	RW1CS	0x0	dma_data_parerr: DMA Data Parity Error. The DMA channel sets this bit indicating that the current transfer has encountered an uncorrectable ECC/parity error reported by the DMA engine.
6:6	RW1CS	0x0	cdata_parerr: Data Parity Error. The DMA channel sets this bit indicating that the current transfer has encountered a parity error. When this bit has been set, the address of the failed descriptor is in the Channel Status register.



Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x180		Function: 0-7	
Bit	Attr	Default	Description
5:5	RW1CS	0x0	chancmd_err: CHANCMD Error. The DMA channel sets this bit indicating that a write to the CHANCMD register contained an invalid value (e.g. more than one command bit set).
4:4	RW1CS	0x0	chn_addr_valerr: Chain Address Value Error. The DMA channel sets this bit indicating that the CHAINADDR register has an illegal address including an alignment error (not on a 64-byte boundary).
3:3	RW1CS	0x0	descriptor_error: The DMA channel sets this bit indicating that the current transfer has encountered an error (not otherwise covered under other error bits) when reading or executing a DMA descriptor. When this bit has been set and the channel returns to the Halted state, the address of the failed descriptor is in the Channel Status register.
2:2	RW1CS	0x0	nxt_desc_addr_err: Next Descriptor Address Error. The DMA channel sets this bit indicating that the current descriptor has an illegal next descriptor address including an alignment error (not on a 64-byte boundary). When this bit has been set and the channel returns to the Halted state, the address of the failed descriptor is in the Channel Status register.
1:1	RW1CS	0x0	dma_xfrer_daddr_err: DMA Transfer Destination Address Error. The DMA channel sets this bit indicating that the current descriptor has an illegal destination address. When this bit has been set, the address of the failure descriptor has been stored in the Channel Status register.
0:0	RW1CS	0x0	dma_trans_saddr_err: DMA Transfer Source Address Error. The DMA channel sets this bit indicating that the current descriptor has an illegal source address. When this bit has been set, the address of the failure descriptor has been stored in the Channel Status register.

8.4.37 chanerrmsk_int

Internal DMA Channel Error Mask Registers.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x184		Function: 0-7	
Bit	Attr	Default	Description
18:18	RWS (Function 0-1) RO (Function 2-7)	0x0	mask18: This register is a bit for bit mask for the CHANERR_INT register 0: enable 1: disable



Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x184		Function: 0-7	
Bit	Attr	Default	Description
17:17	RWS (Function 0-1) RO (Function 2-7)	0x0	mask17: This register is a bit for bit mask for the CHANERR_INT register 0: enable 1: disable
16:16	RWS	0x0	mask16: This register is a bit for bit mask for the CHANERR_INT register 0: enable 1: disable
15:15	RO	0x0	chanerrintmskro:
13:0	RWS	0x0	mask13_0: This register is a bit for bit mask for the CHANERR_INT register 0: enable 1: disable

8.4.38 chanerrsev_int

Internal DMA Channel Error Severity Registers.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x188		Function: 0-7	
Bit	Attr	Default	Description
18:18	RWS (Function 0-1) RO (Function 2-7)	0x0	severity18: (Function 0-1) 1: Corresponding error logged in the CHANERR_INT register is escalated as fatal error to the IIO internal core error logic. 0: That error is escalated as non-fatal to the IIO internal core error logic. Reserved. (Function 2-7)
17:17	RWS (Function 0-1) RO (Function 2-7)	0x0	severity17: (Function 0-1) 1: Corresponding error logged in the CHANERR_INT register is escalated as fatal error to the IIO internal core error logic. 0: That error is escalated as non-fatal to the IIO internal core error logic. Reserved. (Function 2-7)
16:16	RWS	0x0	severity16: 1: Corresponding error logged in the CHANERR_INT register is escalated as fatal error to the IIO internal core error logic. 0: That error is escalated as non-fatal to the IIO internal core error logic.
15:14	RO	0x0	chanerrsev1_0:



Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x188		Function: 0-7	
Bit	Attr	Default	Description
13:0	RWS	0x0	severity13_0: 1: Corresponding error logged in the CHANERR_INT register is escalated as fatal error to the IIO internal core error logic. 0: That error is escalated as non-fatal to the IIO internal core error logic.

8.4.39 chanerrptr

DMA Channel Error Pointer.

Type: CFG		PortID: N/A	
Bus: 0		Device: 4	
Offset: 0x18c		Function: 0-7	
Bit	Attr	Default	Description
4:0	ROS_V	0x0	dma_chan_err_pointer: Points to the first uncorrectable, unmasked error logged in the CHANERR_INT register. This register is only valid when the corresponding error is unmasked and its status bit is set and this register is rearmed to load again once the error pointed to by this register, in the CHANERR_INT status register, is cleared.

8.5 Device 4 Function 0 - 7 MMIO Region CB_BARs

Crystal Beach MMIO Register used to control the DMA functionality. The CB_BAR register points to the based address to these registers.

All of these registers are accessible from only the processor. The IIO supports accessing the Crystal Beach device memory-mapped registers via QWORD reads and writes. The offsets indicated in the following table are from the CB_BAR value.

Register Name	Offset	Size
chancnt	0x0	8
xfercap	0x1	8
genctrl	0x2	8
intrctrl	0x3	8
attnstatus	0x4	32
cbver	0x8	8
intrdelay	0xc	16
cs_status	0xe	16
dmacapability	0x10	32
dcaoffset	0x14	16
cbprio	0x40	8
chanctrl	0x80	16
dma_comp	0x82	16



Register Name	Offset	Size
chancmd	0x84	8
dmacount	0x86	16
chansts_0	0x88	32
chansts_1	0x8c	32
chainaddr_0	0x90	32
chainaddr_1	0x94	32
chancmp_0	0x98	32
chancmp_1	0x9c	32
chanerr	0xa8	32
chanerrmsk	0xac	32
dcactrl	0xb0	32
dca_ver	0x100	8
dca_reqid_offset	0x102	16
csi_capability	0x108	16
pcie_capability	0x10a	16
csi_cap_enable	0x10c	16
pcie_cap_enable	0x10e	16
apicid_tag_map	0x110	64
dca_reqid0	0x180	32
dca_reqid1	0x184	32
msgaddr	0x2000	32
msgupaddr	0x2004	32
msgdata	0x2008	32
vecctrl	0x200c	32
pendingbits	0x3000	32

8.5.1 chancnt

Channel Count.

The Channel Count register specifies the number of channels that are implemented.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x0		Function: 0-7	
Bit	Attr	Default	Description
4:0	RO	0x1	num_chan: Number of channels. Specifies the number of DMA channels. The IIO supports 1 DMA Channel per function so this register will always read 1.

8.5.2 xfercap

Transfer Capacity.



The Transfer Capacity specifies the minimum of the maximum DMA transfer size supported on all channels.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x1		Function: 0-7	
Bit	Attr	Default	Description
4:0	RO	0x14	trans_size: Transfer size. This field specifies the number of bytes that may be specified in a DMA descriptor's Transfer Size field. This defines the maximum transfer size supported by IIO as a power of 2. CPU will support 1M max.

8.5.3 genctrl

DMA General Control.

The DMA Control register provides for general control operations.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x2		Function: 0-7	
Bit	Attr	Default	Description
0:0	RW	0x0	dbgen:

8.5.4 intrctrl

The Interrupt Control register provides for control of DMA interrupts.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x3		Function: 0-7	
Bit	Attr	Default	Description
3:3	RW	0x0	msix_vecctrl: CB DMA ignores this bit
2:2	RO	0x0	intp: Interrupt. This bit is set whenever the channel status bit in the Attention Status register is set and the Master Interrupt Enable bit is set. That is, it is the logical AND of Interrupt Status and Master Interrupt Enable bits of this register. This bit represents the legacy interrupt drive signal (when in legacy interrupt mode). In MSI-X mode, this bit is not used by software and is a don't care.
1:1	RO	0x0	intp_sts: Interrupt Status. This bit is set whenever the bit in the Attention Status register is set. This bit is not used by software in MSI-X mode and is a don't care.



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x3		Function: 0-7	
Bit	Attr	Default	Description
0:0	RW	0x0	mstr_intp_en: Master Interrupt Enable. Setting this bit enables the generation of an interrupt in legacy interrupt mode. This bit is automatically reset each time this register is read. When this bit is cleared, the IIO will not generate a legacy interrupt under otherwise valid conditions. This bit is not used when DMA is in MSI-X mode.

8.5.5 attnstatus

Attention Status.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x4		Function: 0-7	
Bit	Attr	Default	Description
0:0	RO_V	0x0	chanattn: Channel Attention. Represents the interrupt status of the channel. This bit clears when read. Writes have no impact on this bit.

8.5.6 cbver

The CB version register field indicates the version of the CB specification that the IIO implements. The most significant 4-bits (range 7:4) are the major version number and the least significant 4-bits (range 3:0) are the minor version number. The IIO implementation for this Crystal Beach version is 3.2 encoded as 0b0011 0010.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x8		Function: 0-7	
Bit	Attr	Default	Description
7:4	RO	0x3	mjrver: Major Version. Specifies Major version of the CB implementation. Current value is 2h
3:0	RO	0x2	mnrver: Minor Version. Specifies Minor version of the CB implementation. Current value is 0h



8.5.7 intrdelay

Interrupt Delay.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0xc		Function: 0-7	
Bit	Attr	Default	Description
15:15	RO	0x1	interrupt_coalescing_supported: The IIO does support interrupt coalescing by delaying interrupt generation.
13:0	RW	0x0	interrupt_delay_time: Specifies the number of microseconds that the IIO delays generation of an interrupt (legacy or MSI or MSI-X) from the time that interrupts are enabled (That is, Master Interrupt Enable bit in the CSIPINTRCTRL register is set or, for MSI-X when Vector Control bit1, when CHANCTRL: Interrupt Disable for that channel is reset).

8.5.8 cs_status

Chipset Status.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0xe		Function: 0-7	
Bit	Attr	Default	Description
3:3	RO	0x0	address_remapping: This bit reflects the TE bit of the non-VC1 Intel VT-d engine
2:2	RO	0x0	memory_bypass:
1:1	RO	0x0	mmio_restriction:

8.5.9 dmacapability

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x10		Function: 0-7	
Bit	Attr	Default	Description
9:9	RO_V (Function 0-1) RO (Function 2-7)	0x0	xor RAID6: If set, specifies XOR with Galios Field Multiply Parity and Quotient opcodes for RAID5 and RAID6 are supported. The opcodes are: 0x89 - XOR with Galios Field Multiply Generation 0x8A - XOR with Galios Field Multiply Validate 0x8B - XOR with Galios Field Multiply Update Generation Notes: When this bit is zero, the DMA engine will halt if it encounters a descriptor with these opcodes. This bit is set if either the ROL fuse is set to enable ROL or if the RAVDM that enables ROL is received from DMI.



Type: MEM Bus: 0 Offset: 0x10		Port ID: 8'h7e Device: 4		Function: 0-7
Bit	Attr	Default	Description	
8:8	RO	0x0	<p>xor_raid5: If set, specifies XOR without Galios Field Multiply parity only opcodes for RAID5 are supported. The opcodes are: 0x87 - XOR Generation 0x88 - XOR Validate Notes: When this bit is zero, the DMA engine will halt if it encounters a descriptor with these opcodes. This bit is set if either the ROL fuse is set to enable ROL or if the RAVDM that enables ROL is received from DMI.</p>	
7:7	RO	0x1	<p>extended_apic_id: Set if 32b APIC ID's are supported. 1: 32b APIC ID's supported 0: 8b APIC ID's supported</p>	
6:6	RO	0x1	<p>block_fill: If set, specifies the Block Fill opcode is supported. The opcode is: 0x01 - Block Fill Notes: When this bit is zero, the DMA engine will abort if it encounters a descriptor with these opcodes.</p>	
5:5	RO	0x1	<p>move_crc: If set, specifies Move and CRC opcodes are supported. The opcodes are: 0x41 - Move and Generate CRC-32 0x42 - Move and Test CRC-32 0x43 - Move and Store CRC-32 Notes: When this bit is zero, the DMA engine will abort if it encounters a descriptor with these opcodes.</p>	
4:4	RW_O	0x1	<p>dca: If set, specifies DMA DCA operations are supported according to the settings in the descriptors. Notes: When this bit is zero, the DMA engine ignores the DCA hints in DMA descriptors. This bit is RW-O to give bios the ability to turn off DCA operation from CB DMA.</p>	
3:3	RO	0x0	<p>xor: If set, specifies XOR opcodes are supported. Opcodes are: 0x85 - original XOR Generation 0x86 - original XOR Validate Notes: These opcodes have been deprecated in CB DMA v3. The DMA engine will abort if it encounters a descriptor with these opcodes.</p>	



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x10		Function: 0-7	
Bit	Attr	Default	Description
2:2	RO	0x1	marker_skipping: If set, specifies the Marker Skipping opcode is supported. The opcode is: 0x84 - Marker Skipping Notes: When this bit is zero, the DMA engine will abort if it encounters a descriptor with this opcode.
1:1	RO	0x1	crc: If set, specifies CRC Generation opcodes are supported. Opcodes are: 0x81 - CRC-32 Generation 0x82 - CRC-32 Generation & Test 0x83 - CRC-32 Generation & Store Notes: When this bit is zero, the DMA engine will abort if it encounters a descriptor with these opcodes.
0:0	RO	0x1	page_break: If set, specifies a transfer crossing physical pages is supported. Notes: When this bit is zero, software must not set SPBrk nor DPBrk bits in the DMA descriptor and the DMA engine generates an error if either of those bits are set

8.5.10 dcaoffset

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x14		Function: 0-7	
Bit	Attr	Default	Description
15:0	RO	0x100	dcaregptr:

8.5.11 cbprio

CB DMA Priority Register.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x40		Function: 0-7	
Bit	Attr	Default	Description
7:0	RO	0x0	not_used:



8.5.12 chanctrl

The Channel Control register controls the behavior of the DMA channel when specific events occur such as completion or errors.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x80		Function: 0-7	
Bit	Attr	Default	Description
9:9	RW_L	0x0	<p>cmpwr_dca_enable:</p> <p>When this bit is set, and the DMA engine supports DCA, then completion writes will be directed to the CPU indicated in Target CPU. This field is RW if CHANCNT register is 1 otherwise this register is RO.</p>
8:8	RW_LV	0x0	<p>in_use:</p> <p>In Use. This bit indicates whether the DMA channel is in use. The first time this bit is read after it has been cleared, it will return 0 and automatically transition from 0 to 1, reserving the channel for the first consumer that reads this register. All subsequent reads will return 1 indicating that the channel is in use. This bit is cleared by writing a 0 value, thus releasing the channel. A consumer uses this mechanism to atomically claim exclusive ownership of the DMA channel. This should be done before attempting to program any register in the DMA channel register set. This field is RW if CHANCNT register is 1 otherwise this register is RO.</p>
5:5	RW_L	0x0	<p>desc_addr_snp_ctrl:</p> <p>Descriptor address snoop control.</p> <p>1: When set, this bit indicates that the descriptors are not in coherent space and should not be snooped.</p> <p>0: When cleared, the descriptors are in coherent space and each descriptor address must be snooped on QPI.</p> <p>This field is RW if CHANCNT register is 1 otherwise this register is RO.</p>
4:4	RW_L	0x0	<p>err_int_en:</p> <p>Error Interrupt Enable. This bit enables the DMA channel to generate an interrupt (MSI or legacy) when an error occurs during the DMA transfer. If Any Error Abort Enable (see below) is not set, then unaffiliated errors do not cause an interrupt. This field is RW if CHANCNT register is 1 otherwise this register is RO.</p>
3:3	RW_L	0x0	<p>anyerr_abrt_en:</p> <p>Any Error Abort Enable. This bit enables an abort operation when any error is encountered during the DMA transfer. When the abort occurs, the DMA channel generates an interrupt and a completion update as per the Error Interrupt Enable and Error Completion Enable bits. When this bit is reset, only affiliated errors cause the DMA channel to abort. This field is RW if CHANCNT register is 1 otherwise this register is RO.</p>
2:2	RW_L	0x0	<p>err_cmp_en:</p> <p>Error Completion Enable. This bit enables a completion write to the address specified in the CHANCMP register upon encountering an error during the DMA transfer. If Any Error Abort is not set, then unaffiliated errors do not cause a completion write. This field is RW if CHANCNT register is 1 otherwise this register is RO.</p>



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x80		Function: 0-7	
Bit	Attr	Default	Description
0:0	RW1C	0x0	<p>intp_dis:</p> <p>Interrupt Disable. Upon completing a descriptor, if an interrupt is specified for that descriptor and this bit is reset, then the DMA channel generates an interrupt and sets this bit. The choice between MSI or legacy interrupt mode is determined with the MSICTRL register. Legacy interrupts are further gated through intxDisable in the PCICMD register of the CB DMA PCI configuration space. The controlling process can re-enable this channel's interrupt by writing a one to this bit, which clears the bit. Writing a zero has no effect. Thus, each time this bit is reset, it enables the DMA channel to generate one interrupt.</p>

8.5.13 dma_comp

DMA Compatibility Register.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x82		Function: 0-7	
Bit	Attr	Default	Description
2:2	RO	0x1	<p>v3_compatibility:</p> <p>Compatible with version 3 CB spec</p>
1:1	RO	0x1	<p>v2_compatibility:</p> <p>Compatible with version 2 CB spec</p>
0:0	RO	0x0	<p>v1_compatibility:</p> <p>Not compatible with version 1</p>



8.5.14 chancmd

DMA Channel Command Register.

Setting more than one of these bits with the same write operation will result in an Fatal error affiliated.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x84		Function: 0-7	
Bit	Attr	Default	Description
5:5	RW_LV	0x0	<p>reset_dma:</p> <p>Set this bit to reset the DMA channel. Setting this bit is a last resort to recover the DMA channel from a programming error or other problem such as dead lock from cache coherency protocol. Execution of this command does not generate an interrupt or generate status. This command causes the DMA channel to return to a known state Halted. This field is RW if CHANCNT register is 1 otherwise this register is RO.</p>
2:2	RW_LV	0x0	<p>susp_dma:</p> <p>Suspend DMA. Set this bit to suspend the current DMA transfer. This field is RW if CHANCNT register is 1 otherwise this register is RO.</p>

8.5.15 dmacount

DMA Descriptor Count Register.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x86		Function: 0-7	
Bit	Attr	Default	Description
15:0	RW_L	0x0	<p>numdesc:</p> <p>This is the absolute value of the number of valid descriptors in the chain. The hardware sets this register and an internal counter to zero whenever the CHAINADDR register is written. When this register does not equal the value of the internal register, the DMA channel processes descriptors, incrementing the internal counter each time that it completes (or skips) a descriptor. This register is RW if CHANCNT register is 1 otherwise this register is RO.</p>

8.5.16 chansts_0

Channel Status 0 Register.

The Channel Status Register records the address of the last descriptor completed by the DMA channel. Refer to Crystal Beach Architecture Specification 2.0 Rev 1.0 for special hardware requirements when software reads this register.



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x88		Function: 0-7	
Bit	Attr	Default	Description
31:6	RO	0x0	cmpdscaddr: This register stores the upper address bits (64B aligned) of the last descriptor processed. The DMA channel automatically updates this register when an error or successful completion occurs. For each completion, the DMA channel overwrites the previous value regardless of whether that value has been read.
2:0	RO	0x3	dma_trans_state: DMA Transfer Status. The DMA engine sets these bits indicating the state of the current DMA transfer. The cause of an abort can be either error during the DMA transfer or invoked by the controlling process via the CHANCMD register. 000 - Active 001 - Idle, DMA Transfer Done (no hard errors) 010 - Suspended 011 - Halted, operation aborted (refer to Channel Error register for further detail) 100 - Armed

8.5.17 chansts_1

Channel Status 1 Register.

The Channel Status Register records the address of the last descriptor completed by the DMA channel. Refer to Crystal Beach Architecture Specification for special hardware requirements when software reads this register.


Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x8c		Function: 0-7	
Bit	Attr	Default	Description
31:0	RO	0x0	cmpdscaddr: This register stores the upper address bits (64B aligned) of the last descriptor processed. The DMA channel automatically updates this register when an error or successful completion occurs. For each completion, the DMA channel overwrites the previous value regardless of whether that value has been read.

8.5.18 chainaddr_0

Descriptor Chain Address 0 Register.

This register is written by the processor to specify the first descriptor to be fetched by the DMA channel.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x90		Function: 0-7	
Bit	Attr	Default	Description
31:0	RW_L	0x0	dscaddrlo: This 64 bit field marks the address of the first descriptor to be fetched by the DMA channel. The least significant 6 bits must be zero for the address to be valid. This register is RW if CHANCNT register is 1 otherwise this register is RO.



8.5.19 chainaddr_1

Descriptor Chain Address 1 Register.

This register is written by the processor to specify the first descriptor to be fetched by the DMA channel.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x94		Function: 0-7	
Bit	Attr	Default	Description
31:0	RW_L	0x0	dscaddrhi: This 64 bit field marks the address of the first descriptor to be fetched by the DMA channel. The least significant 6 bits must be zero for the address to be valid. This register is RW if CHANCNT register is 1 otherwise this register is RO.

8.5.20 chancmp_0

Channel Completion Address 0 Register.

This register specifies the address where the DMA channel writes the completion status upon completion or an error condition i.e. it writes the contents of the CHANSTS register to the destination as pointed by the CHANCMP register.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x98		Function: 0-7	
Bit	Attr	Default	Description
31:3	RW_L	0x0	chcmpladdr_lo: This 64-bit field specifies the address where the DMA engine writes the completion status (CHANSTS). This address can fall within system memory or memory-mapped I/O space but should be 8-byte aligned. This register is RW if CHANCNT register is 1 otherwise this register is RO.

8.5.21 chancmp_1

Channel Completion Address 1 Register.

This register specifies the address where the DMA channel writes the completion status upon completion or an error condition i.e. it writes the contents of the CHANSTS register to the destination as pointed by the CHANCMP register.



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x9c		Function: 0-7	
Bit	Attr	Default	Description
31:0	RW_L	0x0	<p>chcmpladdr_hi:</p> <p>This 64-bit field specifies the address where the DMA engine writes the completion status (CHANSTS). This address can fall within system memory or memory-mapped I/O space but should be 8-byte aligned. This register is RW if CHANCNT register is 1 otherwise this register is RO.</p>

8.5.22 chanerr

The Channel Error Register records the error conditions occurring within a given DMA channel.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0xa8		Function: 0-7	
Bit	Attr	Default	Description
18:18	RW1CS (Function 0-1) RO (Function 2-7)	0x0	<p>descnterr:</p> <p>The hardware sets this bit when it encounters a base descriptor that requires an extended descriptor (such as an XOR with 8 sources), but DMACount indicates that the Base descriptor is the last descriptor that can be processed.</p>
17:17	RW1CS (Function 0-1) RO (Function 2-7)	0x0	<p>xorqerr:</p> <p>The hardware sets this bit when the Q validation part of the XOR with Galois Field Multiply Validate operation fails.</p>
16:16	RW1CS	0x0	<p>crc_xorp_err:</p> <p>The hardware sets this bit when a CRC Test operation or XOR Validity operation fails or when the P validation part of the XOR with Galois Field Multiply Validate operation fails.</p>
15:15	RO	0x0	<p>unaffil_err:</p> <p>Unaffiliated Error . IIO never sets this bit</p>
13:13	RW1CS	0x0	<p>int_cfg_err:</p> <p>Interrupt Configuration Error. The DMA channel sets this bit indicating that the interrupt registers were not configured properly when the DMA channel attempted to generate an interrupt. E.g. interrupt address is not 0xFEE.</p>
12:12	RW1CS	0x0	<p>cmp_addr_err:</p> <p>Completion Address Error. The DMA channel sets this bit indicating that the completion address register was configured to an illegal address or has not been configured.</p>
11:11	RW1CS	0x0	<p>desc_len_err:</p> <p>Descriptor Length Error. The DMA channel sets this bit indicating that the current transfer has an illegal length field value. When this bit has been set, the address of the failed descriptor is in the Channel Status register.</p>



Type: MEM Bus: 0 Offset: 0xa8		PortID: 8'h7e Device: 4		Function: 0-7
Bit	Attr	Default	Description	
10:10	RW1CS	0x0	desc_ctrl_err: Descriptor Control Error. The DMA channel sets this bit indicating that the current transfer has an illegal control field value. When this bit has been set, the address of the failed descriptor is in the Channel Status register.	
9:9	RW1CS	0x0	wr_data_err: Write Data Error. The DMA channel sets this bit indicating that the current transfer has encountered an error while writing the destination data. This error could be because of an internal ram error in the write queue that stores the write data before being written to main memory. When this bit has been set, the address of the failed descriptor is in the Channel Status register.	
8:8	RW1CS	0x0	rd_data_err: Read Data Error. The DMA channel sets this bit indicating that the current transfer has encountered an error while accessing the source data. This error could be a read data that is received poisoned. When this bit has been set, the address of the failed descriptor is in the Channel Status register.	
7:7	RW1CS	0x0	dma_data_parerr: DMA Data Parity Error. The DMA channel sets this bit indicating that the current transfer has encountered an uncorrectable ECC/parity error reported by the DMA engine.	
6:6	RW1CS	0x0	cdata_parerr: Chipset Data Parity Error. The DMA channel sets this bit indicating that the current transfer has encountered a parity error reported by the chipset. When this bit has been set, the address of the failed descriptor is in the Channel Status register.	
5:5	RW1CS	0x0	chancmd_err: CHANCMD Error. The DMA channel sets this bit indicating that a write to the CHANCMD register contained an invalid value (for example, more than one command bit set).	
4:4	RW1CS	0x0	chn_addr_valerr: Chain Address Value Error. The DMA channel sets this bit indicating that the CHAINADDR register has an illegal address including an alignment error (not on a 64-byte boundary).	
3:3	RW1CS	0x0	descriptor_error: The DMA channel sets this bit indicating that the current transfer has encountered an error (not otherwise covered under other error bits) when reading or executing a DMA descriptor. When this bit has been set and the channel returns to the Halted state, the address of the failed descriptor is in the Channel Status register.	
2:2	RW1CS	0x0	nxt_desc_addr_err: Next Descriptor Address Error. The DMA channel sets this bit indicating that the current descriptor has an illegal next descriptor address including an alignment error (not on a 64-byte boundary). When this bit has been set and the channel returns to the Halted state, the address of the failed descriptor is in the Channel Status register.	



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0xa8		Function: 0-7	
Bit	Attr	Default	Description
1:1	RW1CS	0x0	dma_xfrer_daddr_err: DMA Transfer Destination Address Error. The DMA channel sets this bit indicating that the current descriptor has an illegal destination address. When this bit has been set, the address of the failure descriptor has been stored in the Channel Status register.
0:0	RW1CS	0x0	dma_trans_saddr_err: DMA Transfer Source Address Error. The DMA channel sets this bit indicating that the current descriptor has an illegal source address. When this bit has been set, the address of the failure descriptor has been stored in the Channel Status register.

8.5.23 chanerrmsk

Channel Error Mask Register.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0xac		Function: 0-7	
Bit	Attr	Default	Description
18:18	RWS (Function 0-1) RO (Function 2-7)	0x0	mask18: This register is a bit for bit mask for the CHANERR register 0: enable 1: disable
17:17	RWS (Function 0-1) RO (Function 2-7)	0x0	mask17: This register is a bit for bit mask for the CHANERR register 0: enable 1: disable
16:16	RWS	0x0	mask16: This register is a bit for bit mask for the CHANERR register 0: enable 1: disable
13:0	RWS	0x0	mask13_0: This register is a bit for bit mask for the CHANERR register 0: enable 1: disable

8.5.24 dcactrl

DCA Control.



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0xb0		Function: 0-7	
Bit	Attr	Default	Description
15:0	RW_L	0x0	target_cpu: Specifies the APIC ID of the target CPU for Completion Writes. This field is RW if CHANCNT register is 1 otherwise this register is RO.

8.5.25 dca_ver

DCA Version Number Register.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x100		Function: 0-7	
Bit	Attr	Default	Description
7:4	RO	0x1	major_revision:
3:0	RO	0x0	minor_revision:

8.5.26 dca_reqid_offset

DCA Requester ID Offset.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x102		Function: 0-7	
Bit	Attr	Default	Description
15:0	RO	0x180	dca_reqid_regs: registers are at offset 180h

8.5.27 csi_capability

Intel QPI Compatibility Register.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x108		Function: 0-7	
Bit	Attr	Default	Description
0:0	RO	0x1	prefetch_hint: IIO supports Prefetch Hint only method on the coherent interface



8.5.28 pcie_capability

PCI Express Capability Register.

Type:	MEM	PortID:	8'h7e	Function:	0-7
Bus:	0	Device:	4		
Offset:	0x10a				
Bit	Attr	Default	Description		
0:0	RO	0x1	memwr: IIO supports only memory write method on PCI Express		

8.5.29 csi_cap_enable

Intel QPI Capability Enable Register.

Type:	MEM	PortID:	8'h7e	Function:	0-7
Bus:	0	Device:	4		
Offset:	0x10c				
Bit	Attr	Default	Description		
0:0	RW	0x0	enable_prefetch_hint: When set in function 0, DCA on Intel QPI is enabled, else disabled. IIO hardware does not use this bit from functions 1-7. In these functions, this bit is provided primarily for BIOS to communicate to driver that DCA is enabled in the IIO.		

8.5.30 pcie_cap_enable

PCI Express Capability Enable Register.

Type:	MEM	PortID:	8'h7e	Function:	0-7
Bus:	0	Device:	4		
Offset:	0x10e				
Bit	Attr	Default	Description		
0:0	RW	0x0	enable_memwr_on_pcie: When set in function 0, DCA on PCIe is enabled, else disabled. IIO hardware does not use this bit from functions 1-7. In these functions, this bit is provided primarily for BIOS to communicate to driver that DCA is enabled in the IIO.		

8.5.31 apicid_tag_map

APICID to Tag Map Register.

When DCA is disabled, DMA engine uses all 1s in the tag field of the write.

This register is setup by BIOS for the CB driver to read. BIOS will map APICID[7:5] to bits Tag[2:0]. BIOS should set Tag[4] to prevent implicit TPH cache target unless it is intended.



Type: MEM Bus: 0 Offset: 0x110				PortID: 8'h7e Device: 4		Function: 0-7	
Bit	Attr	Default	Description				
39:32	RW	0x80	tag_map_4: This field is used by the CB DMA engine to populate Tag field bit 4 of the memory write transaction it issues with either 1, 0, or a selected APICID bit. [7:6] 00: Tag[4] = Tag_Map_4[0] 01: Tag[4] = APICID[Tag_Map_4[3:0]] 10: Tag[4] = NOT(APICID [Tag_Map_4[3:0]]) 11: reserved				
31:24	RW	0x80	tag_map_3: This field is used by the CB DMA engine to populate Tag field bit 3 of the memory write transaction it issues with either 1, 0, or a selected APICID bit. [7:6] 00: Tag[3] = Tag_Map_3[0] 01: Tag[3] = APICID[Tag_Map_3[3:0]] 10: Tag[3] = NOT(APICID[Tag_Map_3[3:0]]) 11: reserved				
23:16	RW	0x80	tag_map_2: This field is used by the CB DMA engine to populate Tag field bit 2 of the memory write transaction it issues with either 1, 0, or a selected APICID bit. [7:6] 00: Tag[2] = Tag_Map_2[0] 01: Tag[2] = APICID[Tag_Map_2[3:0]] 10: Tag[2] = NOT(APICID[Tag_Map_2[3:0]]) 11: reserved				
15:8	RW	0x80	tag_map_1: This field is used by the CB DMA engine to populate Tag field bit 1 of the memory write transaction it issues with either 1, 0, or a selected APICID bit. [7:6] 00: Tag[1] = Tag_Map_1[0] 01: Tag[1] = APICID[Tag_Map_1[3:0]] 10: Tag[1] = NOT(APICID[Tag_Map_1[3:0]]) 11: reserved				
7:0	RW	0x80	tag_map_0: This field is used by the CB DMA engine to populate Tag field bit 0 of the memory write transaction it issues with either 1, 0, or a selected APICID bit. [7:6] 00: Tag[0] = Tag_Map_0[0] 01: Tag[0] = APICID[Tag_Map_0[3:0]] 10: Tag[0] = NOT (APICID[Tag_Map_0[3:0]]) 11: reserved				



8.5.32 dca_reqid[0:1]

Global DCA Requester ID Table Registers.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x180, 0x184		Function: 0-7	
Bit	Attr	Default	Description
31:31	RO	0x0	last: This bit is set only in the last RequesterID register for this port. Thus, it identifies that this is the last DCA RequesterID register for this port.
29:29	RW	0x0	valid: when set the requester id programed into bits 15:0 is used by hardware for DCA write identification, otherwise the bits are ignored.
28:28	RW	0x0	ignore_function_number: When set, the function number field in the RequesterID is ignored when authenticating a DCA write, otherwise the function number is included
15:8	RW	0x0	bus_number: PCI bus number of the DCA requester
7:3	RW	0x0	device_number: Device number of the day requester
2:0	RW	0x0	function_number: Function number of the day requester

8.5.33 msgaddr

MSI-X Lower Address Registers.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x2000		Function: 0-7	
Bit	Attr	Default	Description
31:2	RW_V	0x0	chmsgaddr: Specifies the local APIC to which this MSI-X interrupt needs to be sent
1:0	RO	0x0	chmsgaddr_const:

8.5.34 msgupaddr

MSI-X Upper Address Registers.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x2004		Function: 0-7	
Bit	Attr	Default	Description
31:0	RW_V	0x0	chmsgupaddr_const: Reserved to 0 because does not apply to IA. This field is RW for compatibility reason only.



8.5.35 msgdata

MSI-X Data Registers.

Type: MEM Bus: 0 Offset: 0x2008		PortID: 8'h7e Device: 4 Function: 0-7	
Bit	Attr	Default	Description
31:0	RW_V	0x0	chmsgdata: Specifies the vector that needs to be used for interrupts from the DMA engine. IIO uses the lower 16 bits of this field to form the data portion of the interrupt on the coherent interface. The upper 16 bits are not used by IIO and left as RW only for compatibility reasons.

8.5.36 vecctrl

MSI-X Vector Control Registers.

Type: MEM Bus: 0 Offset: 0x200c		PortID: 8'h7e Device: 4 Function: 0-7	
Bit	Attr	Default	Description
31:1	RO	0x0	chvecctrlcnst: 1
0:0	RW_V	0x1	chmask: When a bit is set, the channel is prohibited from sending a message, even if all other internal conditions for interrupt generation are valid.

8.5.37 pendingbits

MSI-X Interrupt Pending Bits Registers.

Type: MEM Bus: 0 Offset: 0x3000		PortID: 8'h7e Device: 4 Function: 0-7	
Bit	Attr	Default	Description
31:1	RO	0x0	chmsipendcnst: unused



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 4	
Offset: 0x3000		Function: 0-7	
Bit	Attr	Default	Description
0:0	RW_V	0x0	<p>chmsipend:</p> <p>Pending Bit (when set) indicates that the DMA engine has a pending MSI-X message for the DMA Channel. This bit is cleared by hardware as soon as it issues the MSI-X message. Note that a Pending Bit is set only if all internal conditions for generation of an MSIX interrupt (like the Channel Interrupt Disable bit being cleared, etc.) are valid. This does not include the MSI-X Mask bit for the channel and the MSI-X Function Mask bit. Once set, a Pending Bit remains set until:</p> <p>The corresponding MSI-X Mask bit and the MSI-X Function Mask bit are both cleared, at which time the IIO issues the pending message and clears the bit. Pending bit is cleared when the Interrupt Disable bit in the corresponding 'Channel Control Register (CHANCTRL)' transitions from 1b to 0b and there is not another interrupt pending for that channel - no MSI-X message issued.</p> <p>Implementation Note: Implementations can consider an MSI message 'issued to the system', as soon as the message is 'posted' internally in the device.</p>

8.6 Device 5 Function 0

Intel® Virtualization Technology (Intel® VT) for Directed I/O (Intel® VT-d), Address Mapping, System Management, Coherent Interface, Misc Registers.

Register Name	Offset	Size
vid	0x0	16
did	0x2	16
pcicmd	0x4	16
pcists	0x6	16
rid	0x8	8
ccr	0x9	24
clsr	0xc	8
hdr	0xe	8
svid	0x2c	16
sdid	0x2e	16
capptr	0x34	8
intl	0x3c	8
intpin	0x3d	8
pxpcapid	0x40	8
pxpnxtptr	0x41	8
pxpcap	0x42	16
hdrtypectrl	0x80	8
mmcfg_base	0x84	32
mmcfg_limit	0x88	32
tseg	0xa8	64
genprotrange1_base	0xb0	64
genprotrange1_limit	0xb8	64
genprotrange2_base	0xc0	64



Register Name	Offset	Size
genprotrange2_limit	0xc8	64
tolm	0xd0	32
tohm	0xd4	64
ncmem_base	0xe0	64
ncmem_limit	0xe8	64
mencmem_base	0xf0	64
mencmem_limit	0xf8	64
cpubusno	0x108	32
lmmiol_base	0x10c	16
lmmiol_limit	0x10e	16
lmmioh_base	0x110	64
lmmioh_limit	0x118	64
genprotrange0_base	0x120	64
genprotrange0_limit	0x128	64
gcfgbus_base	0x134	8
gcfgbus_limit	0x135	8
cipctrl	0x140	32
cipsts	0x144	32
cipdcasad	0x148	32
cipintrc	0x14c	64
cipintrs	0x154	32
vtbar	0x180	32
vtgenctrl	0x184	16
vtisochctrl	0x188	32
vtgenctrl2	0x18c	32
iotlbpartition	0x194	32
vtuncerrsts	0x1a8	32
vtuncerrmsk	0x1ac	32
vtuncerrsev	0x1b0	32
vtuncerrptr	0x1b4	8
iiomiscctrl	0x1c0	64
ltdpr	0x290	32
lcfgbus_base	0x41c	8
lcfgbus_limit	0x41d	8
csipintrs	0x450	32



8.6.1 vid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x0		Function: 0	
Bit	Attr	Default	Description
15:0	RO	0x8086	vendor_identification_number: The value is assigned by PCI-SIG to Intel.

8.6.2 did

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2		Function: 0	
Bit	Attr	Default	Description
15:0	RO	0xe28	device_identification_number: Device ID values vary from function to function. Bits 15:8 are equal to 0x0E.

8.6.3 pcicmd

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x4		Function: 0	
Bit	Attr	Default	Description
10:10	RO	0x0	intx_disable: NA for these devices
9:9	RO	0x0	fast_back_to_back_enable: Not applicable to PCI Express and is hardwired to 0
8:8	RO	0x0	serr_enable: This bit has no impact on error reporting from these devices
7:7	RO	0x0	idsel_stepping_wait_cycle_control: Not applicable to internal devices. Hardwired to 0.
6:6	RO	0x0	parity_error_response: This bit has no impact on error reporting from these devices
5:5	RO	0x0	vga_palette_snoop_enable: Not applicable to internal devices. Hardwired to 0.
4:4	RO	0x0	memory_write_and_invalidate_enable: Not applicable to internal devices. Hardwired to 0.
3:3	RO	0x0	special_cycle_enable: Not applicable. Hardwired to 0.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x4		Function: 0	
Bit	Attr	Default	Description
2:2	RO	0x0	bus_master_enable: Hardwired to 0 since these devices don't generate any transactions
1:1	RO	0x0	memory_space_enable: Hardwired to 0 since these devices don't decode any memory BARs
0:0	RO	0x0	io_space_enable: Hardwired to 0 since these devices don't decode any IO BARs

8.6.4 pcists

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x6		Function: 0	
Bit	Attr	Default	Description
15:15	RO	0x0	detected_parity_error: This bit is set when the device receives a packet on the primary side with an uncorrectable data error including a packet with poison bit set or an uncorrectable addresscontrol parity error. The setting of this bit is regardless of the Parity Error Response bit PERRE in the PCICMD register. R2PCIe will never set this bit.
14:14	RO	0x0	signaled_system_error: Hardwired to 0
13:13	RO	0x0	received_master_abort: Hardwired to 0
12:12	RO	0x0	received_target_abort: Hardwired to 0
11:11	RO	0x0	signaled_target_abort: Hardwired to 0
10:9	RO	0x0	devsel_timing: Not applicable to PCI Express. Hardwired to 0.
8:8	RO	0x0	master_data_parity_error: Hardwired to 0
7:7	RO	0x0	fast_back_to_back: Not applicable to PCI Express. Hardwired to 0.
5:5	RO	0x0	pci66mhz_capable: Not applicable to PCI Express. Hardwired to 0.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x6		Function: 0	
Bit	Attr	Default	Description
4:4	RO	0x1	capabilities_list: This bit indicates the presence of a capabilities list structure
3:3	RO	0x0	intx_status: Hardwired to 0

8.6.5 rid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x8		Function: 0	
Bit	Attr	Default	Description
7:0	RO_V	0x0	revision_id: Reflects the Uncore Revision ID after reset. Reflects the Compatibility Revision ID after BIOS writes 0x69 to any RID register in any Intel® Xeon® Processor E5 v2 product family function. Implementation Note: Read and write requests from the host to any RID register in any Intel® Xeon® Processor E5 v2 product family function are re-directed to the IIO cluster. Accesses to the CCR field are also redirected due to DWORD alignment. It is possible that JTAG accesses are direct, so will not always be redirected.

8.6.6 ccr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x9		Function: 0	
Bit	Attr	Default	Description
23:16	RO_V	0x8	base_class: Generic Device
15:8	RO_V	0x80	sub_class: Generic Device
7:0	RO_V	0x0	register_level_programming_interface: Set to 00h for all non-APIC devices.



8.6.7 clsr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xc		Function: 0	
Bit	Attr	Default	Description
7:0	RW	0x0	cacheline_size: This register is set as RW for compatibility reasons only. Cacheline size is always 64B.

8.6.8 hdr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xe		Function: 0	
Bit	Attr	Default	Description
7:7	RO	0x1	multi_function_device: This bit defaults to 1b since all these devices are multi-function
6:0	RO	0x0	configuration_layout: This field identifies the format of the configuration header layout. It is Type 0 for all these devices. The default is 00h, indicating a 'endpoint device'.

8.6.9 svid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2c		Function: 0	
Bit	Attr	Default	Description
15:0	RW_O	0x0	subsystem_vendor_identification_number: The default value specifies Intel but can be set to any value once after reset.

8.6.10 sdid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2e		Function: 0	
Bit	Attr	Default	Description
15:0	RW_O	0x0	subsystem_device_identification_number: Assigned by the subsystem vendor to uniquely identify the subsystem



8.6.11 capptr

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x34	Function:	0
Bit	Attr	Default	Description
7:0	RO	0x40	capability_pointer: Points to the first capability structure for the device which is the PCIe capability.

8.6.12 intl

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x3c	Function:	0
Bit	Attr	Default	Description
7:0	RO	0x0	interrupt_line: NA for these devices

8.6.13 intpin

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x3d	Function:	0
Bit	Attr	Default	Description
7:0	RO	0x0	interrupt_pin: NA since these devices do not generate any interrupt on their own

8.6.14 pxpcapid

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x40	Function:	0
Bit	Attr	Default	Description
7:0	RO	0x10	capability_id: Provides the PCI Express capability ID assigned by PCI-SIG.



8.6.15 pxpnxtptr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x41		Function: 0	
Bit	Attr	Default	Description
7:0	RO	0x0	next_ptr: This field is set to the PCI PM capability.

8.6.16 pxpcap

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x42		Function: 0	
Bit	Attr	Default	Description
13:9	RO	0x0	interrupt_message_number_n_a:
8:8	RO	0x0	slot_implemented_n_a:
7:4	RO	0x9	device_port_type: This field identifies the type of device. It is set to for the DMA to indicate root complex integrated endpoint device.
3:0	RO	0x2	capability_version: This field identifies the version of the PCI Express capability structure. Set to 2h for PCI Express and DMA devices for compliance with the extended base registers.

8.6.17 hdrtypectrl

PCI Header Type Control

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x80		Function: 0	
Bit	Attr	Default	Description
2:0	RW	0x0	clr_hdrmfd: When set, function#0 with in the indicated device shows a value of 0 for bit 7 of the HDR register, indicating a single function device. BIOS sets this bit, when only function#0 is visible within the device, either because SKU reasons or BIOS has hidden all functions but function#0 within the device via the DEVHIDE register. Bit 0 is for Device#1 Bit 1 is for Device#2 Bit 3 is for Device#3 Currently this is defined only for devices 1, 2 and 3 because in other devices it is expected that at least 2 functions are visible to OS or the entire device is hidden.



8.6.18 mmcfg_base

MMCFG Address Base

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x84		Function: 0	
Bit	Attr	Default	Description
31:26	RW_LB	0x3f	mmcfg_base_addr: Indicates the base address which is aligned to a 64 MB boundary.

8.6.19 mmcfg_limit

MMCFG Address Limit.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x88		Function: 0	
Bit	Attr	Default	Description
31:26	RW_LB	0x0	mmcfg_limit_addr: Indicates the limit address which is aligned to a 64MB boundary. Any access that decodes to be between MMCFG.BASE<= Addr <= MMCFG.LIMIT targets the MMCFG region and is aborted by IIO. Setting the MMCFG.BASE greater than MMCFG.LIMIT, disables this region.

8.6.20 tseg

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xa8		Function: 0	
Bit	Attr	Default	Description
63:52	RW_LB	0x0	limit: Indicates the limit address which is aligned to a 1MB boundary. Any access to falls within TSEG.BASE[31:20] <= Addr[31:20] <= TSEG.LIMIT[31:20] is considered to target the Tseg region and IIO aborts it. Note that address bits 19:0 are ignored and not compared. The result is that BASE[19:0] is effectively 00000h and LIMIT is effectively FFFFh. Setting the TSEG.BASE greater than the limit, disable this region.
31:20	RW_LB	0xfe0	base: Indicates the base address which is aligned to a 1MB boundary. Bits [31:20] corresponds to A[31:20] address bits.

8.6.21 genprotrange[1:0]_base

Generic Protected Memory Range X Base Address. (X = 1, 0)



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xb0, 0x120		Function: 0	
Bit	Attr	Default	Description
63:51	RV	0x0	Reserved.
50:16	RW_LB	0x7fffffff	<p>base_address:</p> <p>[50:16] of generic memory address range that needs to be protected from inbound dma accesses. The protected memory range can be anywhere in the memory space addressable by the processor. Addresses that fall in this range i.e. GenProtRange.Base[63:16] <= Address [63:16] <= GenProtRange.Limit [63:16], are completly aborted by IIO.</p> <p>Setting the Protected range base address greater than the limit address disables the protected memory region. Note that this range is orthogonal to Intel VT-d spec defined protected address range.</p> <p>Since this register provides for a generic range, it can be used to protect any system dram region or MMIO region from DMA accesses. But the expected usage for this range is to abort all PCIe accesses to the PCI-Segments region.</p>
15:0	RV	0x0	Reserved.



8.6.22 genprotrange[1:0]_limit

Generic Protected Memory Range X Limit Address. (X = 1, 0)

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xb8, 0x128		Function: 0	
Bit	Attr	Default	Description
63:51	RV	0x0	rsvd:
31:16	RW_LB	0x0	<p>limit_address:</p> <p>[50:16] of generic memory address range that needs to be protected from inbound dma accesses. The protected memory range can be anywhere in the memory space addressable by the processor. Addresses that fall in this range i.e. GenProtRange.Base[63:16] <= Address [63:16] <= GenProtRange.Limit [63:16], are completler aborted by IIO.</p> <p>Setting the Protected range base address greater than the limit address disables the protected memory region.</p> <p>Note that this range is orthogonal to Intel VT-d spec defined protected address range. This register is programmed once at boot time and does not change after that, including any quiesce flows. Since this register provides for a generic range, it can be used to protect any system dram region from DMA accesses. The expected usage for this range is to abort all PCIe accesses to the PCI-Segments region.</p>
15:0	RV	0x0	rsvd:

8.6.23 genprotrange2_base

Generic Protected Memory Range 2 Base Address.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xc0		Function: 0	
Bit	Attr	Default	Description
63:51	RV	0x0	Reserved.
50:16	RW_LB	0x7fffffff	<p>base_address:</p> <p>[50:16] of generic memory address range that needs to be protected from inbound dma accesses. The protected memory range can be anywhere in the memory space addressable by the processor. Addresses that fall in this range i.e. GenProtRange.Base[63:16] <= Address [63:16] <= GenProtRange.Limit [63:16], are completler aborted by IIO.</p> <p>Setting the Protected range base address greater than the limit address disables the protected memory region.</p> <p>Note that this range is orthogonal to Intel VT-d spec defined protected address range. This register is programmed once at boot time and does not change after that, including any quiesce flows.</p> <p>This region is expected to be used to protect against PAM region accesses inbound, but could also be used for other purposes, if needed.</p>
15:0	RV	0x0	Reserved.



8.6.24 genprotrange2_limit

Generic Protected Memory Range 2 Limit Address.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xc8		Function: 0	
Bit	Attr	Default	Description
63:51	RV	0x0	Reserved:
31:16	RW_LB	0x0	limit_address: [50:16] of generic memory address range that needs to be protected from inbound dma accesses. The protected memory range can be anywhere in the memory space addressable by the processor. Addresses that fall in this range i.e. GenProtRange.Base[63:16] <= Address [63:16] <= GenProtRange.Limit [63:16], are completely aborted by IIO. Setting the Protected range base address greater than the limit address disables the protected memory region. Note that this range is orthogonal to Intel VT-d spec defined protected address range. This register is programmed once at boot time and does not change after that, including any quiesce flows. This region is expected to be used to protect against PAM region accesses inbound, but could also be used for other purposes, if needed.
15:0	RV	0x0	Reserved:

8.6.25 tolm

Top of Low Memory

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xd0		Function: 0	
Bit	Attr	Default	Description
31:26	RW_LB	0x0	addr: TOLM Address. Indicates the top of low dram memory which is aligned to a 64MB boundary. A 32 bit transaction that satisfies '0 <= Address[31:26] <= TOLM[31:26]' is a transaction towards main memory.
25:0	RV	0x0	Reserved.

8.6.26 tohm

Top of High Memory.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xd4		Function: 0	
Bit	Attr	Default	Description
63:26	RW_LB	0x0	addr: TOHM Address. Indicates the limit of an aligned 64 MB granular region that decodes >4 GB addresses towards system dram memory. A 64-bit transaction that satisfies '4G <= A[63:26] <= TOHM[63:26]' is a transaction towards main memory. This register is programmed once at boot time and does not change after that, including during quiesce flows.



Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	5		
Offset:	0xd4				
Bit	Attr	Default	Description		
25:0	RV	0x0	Reserved.		

8.6.27 ncmem_base

Non-Coherent Memory Base Address.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	5		
Offset:	0xe0				
Bit	Attr	Default	Description		
63:26	RW_LB	0x3fffffff	addr: Non Coherent memory base address. Describes the base address of a 64MB aligned dram memory region on Intel QPI that is non-coherent. Address bits [63:26] of an inbound address if it satisfies 'NcMem.Base[63:26] <= A[63:26] <= NcMem.Limit[63:26]' is considered to be towards the non-coherent Intel QPI memory region. This means that IIO cannot ever use 'allocating' write commands for accesses to this region, over IDI. This, in effect, means that DCA/TH writes cannot ever target this address region. The range indicated by the Non-coherent memory base and limit registers does not necessarily fall within the low dram or high dram memory regions as described via the corresponding base and limit registers. Usage Model for this range is ROL. Accesses to this range default to NSWr and NSRd accesses on Intel QPI. But accesses to this range will use non-allocating reads and writes, when enabled. This register is programmed once at boot time and does not change after that, including any quiesce flows		
25:0	RV	0x0	Reserved.		

8.6.28 ncmem_limit

Non-Coherent Memory Limit.

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	5		
Offset:	0xe8				
Bit	Attr	Default	Description		
63:26	RW_LB	0x0	addr: Non Coherent memory limit address. Describes the limit address of a 64 MB aligned dram memory region on Intel QPI that is non-coherent. Address bits [63:26] of an inbound address if it satisfies 'NcMem.Base[63:26] <= A[63:26] <= NcMem.Limit[63:26]' is considered to be towards the non-coherent Intel QPI memory region. This means that IIO cannot ever use 'allocating' write commands for accesses to this region, over IDI. This in effect means that DCA/TH writes cannot ever target this address region. The range indicated by the Non-coherent memory base and limit registers does not necessarily fall within the low dram or high dram memory regions as described via the corresponding base and limit registers. This register is programmed once at boot time and does not change after that, including any quiesce flows.		
25:0	RV	0x0	Reserved.		



8.6.29 mencmem_base

Intel® Management Engine (Intel® ME) Non-Coherent Memory Base Address.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xf0		Function: 0	
Bit	Attr	Default	Description
63:19	RW_LB	0x1fffffffff	addr: Intel® Management Engine (Intel® ME) UMA Base Address. Indicates the base address which is aligned to a 1MB boundary. Bits [63:19] corresponds to A[63:19] address bits.
18:0	RV	0x0	Reserved.

8.6.30 mencmem_limit

Intel® Management Engine (Intel® ME) Non-Coherent Memory Base Limit.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xf8		Function: 0	
Bit	Attr	Default	Description
63:19	RW_LB	0x0	addr: Intel ME UMA Limit Address. Indicates the limit address which is aligned to a 1MB boundary. Bits [63:19] corresponds to A[63:19] address bits. Any address that falls within $MENCMEMBASE \leq Addr \leq MENCMEMLIMIT$ range is considered to target the UMA range. How the access is treated is described in the Address Map and Tx Flow chapters of EDS VOL3. Setting the MENCMEMBASE greater than the MENCMEMLIMIT disables this range. The range indicated by this register must fall within the low dram or high dram memory regions as described via the corresponding base and limit registers.
18:0	RV	0x0	Reserved.

8.6.31 cpubusno

CPU Internal Bus Numbers.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x108		Function: 0	
Bit	Attr	Default	Description
24:17	RW_LB	0x0	segment:
16:16	RW_LB	0x0	valid: 1: IIO claims PCI config accesses from ring if: the bus# matches the value in bits 7:0 of this register and Dev# >= 16 OR the bus# does not match either the value in bits 7:0 or 15:8 of this register 0: IIO does not claim PCI config accesses from ring



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x108		Function: 0	
Bit	Attr	Default	Description
15:8	RW_LB	0x0	bus1: Is the internal bus# of rest of uncore. All devices are claimed by UBOX on behalf of this component. Devices that do not exist within this component on this bus number are master aborted by the UBOX.
7:0	RW_LB	0x0	bus0: Is the internal bus# of IIO and also PCH. Configuration requests that target Devices 16-31 on this bus number must be forwarded to the PCH by the IIO. Devices 0-15 on this bus number are claimed by the UBOX to send to IIO internal registers. UBOX master aborts devices 8-15 automatically, since these devices do not exist.

8.6.32 Immiol_base

Local MMIO Low Base.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x10c		Function: 0	
Bit	Attr	Default	Description
15:8	RW_LB	0x0	base: Corresponds to A[31:24] of MMIOL base address. An inbound memory address that satisfies 'local MMIOL base[15:8] <= A[31:24] <= local MMIOL limit[15:8]' is treated as a local peer-to-peer transaction that do not cross coherent interface. Note: Setting LMMIOL.BASE greater than LMMIOL.LIMIT disables local MMIOL peer-to-peer. This register is programmed once at boot time and does not change after that, including any quiesce flows.

8.6.33 Immiol_limit

Local MMIO Low Limit.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x10e		Function: 0	
Bit	Attr	Default	Description
15:8	RW_LB	0x0	limit: Corresponds to A[31:24] of MMIOL limit. An inbound memory address that satisfies 'local MMIOL base[15:8] <= A[31:24] <= local MMIOL limit[15:8]' is treated as a local peer-to-peer transaction that does not cross the coherent interface. Note: Setting LMMIOL.BASE greater than LMMIOL.LIMIT disables local MMIOL peer-to-peer. This register is programmed once at boot time and does not change after that, including any quiesce flows.



8.6.34 Immioh_base

Local MMIO High Base.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x110		Function: 0	
Bit	Attr	Default	Description
50:26	RW_LB	0x0	<p>base:</p> <p>Corresponds to A[50:26] of MMIOH base. An inbound memory address that satisfies local MMIOH base [50:26] <= A[63:26] <= local MMIOH limit [50:26] is treated as a local peer-to-peer transaction that does not cross the coherent interface.</p> <p>Notes:</p> <p>Setting LMMIOH.BASE greater than LMMIOH.LIMIT disables local MMIOH peer-to-peer.</p> <p>This register is programmed once at boot time and does not change after that, including any quiesce flows.</p>

8.6.35 Immioh_limit

Local MMIO High Limit.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x118		Function: 0	
Bit	Attr	Default	Description
50:26	RW_LB	0x0	<p>Local LMMIOH Limit: Address</p> <p>Corresponds to A[50:26] of Local MMIOH Limit (and Base) Address. An inbound memory address that satisfies the Local MMIO Base Address [50:26] <= A[63:26] <= Local MMIOH Limit Address [50:26], with A[63:51] equal to zero, is treated as a local peer2peer transaction that does not cross the coherent interface (ring).</p> <p>Notes:</p> <p>Setting LMMIOH.BASE greater than LMMIOH.LIMIT disables local MMIOH peer-to-peer.</p> <p>This register is programmed once at boot time and does not change after that, including any quiesce flows.</p>



8.6.36 cipctrl

Coherent Interface Protocol Control.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x140		Function: 0	
Bit	Attr	Default	Description
31:31	RW	0x0	<p>flushpendwr:</p> <p>Whenever this bit is written to 1 (regardless what the current value of this bit is), IRP block first clears bit 0 in CIPSTS register and takes a snapshot of the currently pending write transactions to dram in Write Cache, wait for them to complete fully (i.e. deallocate the corresponding Write CacheRRB entry) and then set bit 0 in CIPSTS register.</p>
28:28	RW	0x0	<p>disrupdtflow:</p> <p>When set, PCIWriteUpdate command is never issued on IDI and the writes that triggered this flow would be treated as 'normal' writes and the rules corresponding to the 'normal writes' apply.</p>
16:16	RW	0x0	<p>rrbsize_3:</p> <p>This is the MSB bit for the rrbsize. The lower 3-bits of the rrbsize reside in CIPCTRL[11:9]</p>
15:15	RW	0x0	<p>rd_merge_enable:</p>
14:12	RW	0x0	<p>socketid:</p> <p>This is the BIOS programmed field that indicates the 'SocketID' of this particular socket. 'SocketID' is the unique value that each socket in the system gets for DCADIO target determination. Normally this value is the same as the APICID[7:5] of the cores in the socket, but it can be other values as well, if system topology were to not allow that straight mapping.</p> <p>IIO uses strapped NodeID to compare against the target NodeID determined by using the target SocketID value as a lookup into the CIPDCASAD register. If there is a match, then a PCIDCAHint is not sent (since the data is already located in the same LLC).</p> <p>This register is not used for this comparison. It is not used by hardware at all.</p>
11:9	RW	0x0	<p>rrbsize:</p> <p>Specifies the number of entries used in each half of the write cache. The default is to use all entries.</p> <p>0000: 104 each side (208 total) 0001: 96 each side (192 total) 0010: 88 each side (176 total) 0011: 80 each side (160 total) 0100: 72 each side (144 total) 0101: 64 each side (128 total) 0110: 56 each side (112 total) 0111: 48 each side (96 total) 1000: 40 each side (80 total) 1001: 32 each side (64 total) 1010: 24 each side (48 total) 1011: 16 each side (32 total) 1100: 8 each side (16 total) Others Invalid</p> <p>Used to limit performance for tuning purposes.</p> <p>This defeature mode should not be used in conjunction with ctagencyavailmask in IRPMISCDFX2 / IRPMISCDFX3.</p> <p>User must also ensure that the Switch CSIPOOLDFX01 CSR maxcache fields are programmed accordingly to reflect the actual number of write cache entries used in IRP else unknown behavior may result.</p> <p>rrbsize3 is located at CIPCTRL16</p>



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x140		Function: 0	
Bit	Attr	Default	Description
8:6	RW	0x1	numrtid_vcp: 000: 0 001: 1 010: 2 011: 3 100: 4 Others: Reserved
5:3	RW	0x0	numrtids_vc1: 000: 0 001: 1 010: 2 011: 3 100: 4 Others: Reserved
2:2	RW	0x0	pcirdcurr_drduc_sel_vcp: VCp selection of PCIRdCurrent or DRd.UC 0: PCIRdCurrent 1: DRd.UC NOTE: This CSR should always be set to '0' due to Cbo issues in handling VCp requests as DRd.UC.
1:1	RW	0x0	diswrcomb: Causes all writes to send a WB request as soon as M-state is acquired. See Section 3.12.2 for details. 0: Enable b2b Write Combining for writes from same port 1: Disable b2b Write Combining for writes from same port
0:0	RW	0x0	pcirdcurr_drduc_sel: On Inbound Coherent Reads selection of RdCur or DRd is done based on this configuration bit. 0: PCIRdCurrent 1: DRd.UC

8.6.37 cipsts

Coherent Interface Protocol Status.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x144		Function: 0	
Bit	Attr	Default	Description
2:2	RO_V	0x1	rrb_non_phold_arb_empty: This indicates that there are no pending requests in the RRB with the exception of ProcLock / Unlock messages to the lock arbiter.0 - Pending RRB requests 1 - RRB Empty except for any pending Proclock / Unlock This is a live bit and hence can toggle clock by clock. This is provided mostly as a debug visibility feature.



Type: CFG Bus: 0 Offset: 0x144		PortID: N/A Device: 5 Function: 0	
Bit	Attr	Default	Description
1:1	RO_V	0x1	rrb_empty: This indicates that there are no pending requests in the RRB.0 - Pending RRB requests 1 - RRB Empty This is a live bit and hence can toggle clock by clock. This is provided mostly as a debug visibility feature.
0:0	RO_V	0x0	flush_pending_writes: This bit gets cleared whenever bit 31 in CIPCTRL is written to 1 by software and gets set by hw when the pending writes in the Write Cache (at the time bit 31 in CIPCTRL is written to 1 by software) complete i.e. the Write Cache/RRB entry is deallocated for all those writes.

8.6.38 cipdcasad

Coherent Interface Protocol DCA Source Address Decode.

Type: CFG Bus: 0 Offset: 0x148		PortID: N/A Device: 5 Function: 0	
Bit	Attr	Default	Description
31:29	RW	0x0	dcalt7: For a TPH/DCA request, specifies the target NodeID[2:0] when the inverted Tag[2:0] is 7
28:26	RW	0x0	dcalt6: For a TPH/DCA request, specifies the target NodeID[2:0] when the inverted Tag[2:0] is 6
25:23	RW	0x0	dcalt5: For a TPH/DCA request, specifies the target NodeID[2:0] when the inverted Tag[2:0] is 5
22:20	RW	0x0	dcalt4: For a TPH/DCA request, specifies the target NodeID[2:0] when the inverted Tag[2:0] is 4
19:17	RW	0x0	dcalt3: For a TPH/DCA request, specifies the target NodeID[2:0] when the inverted Tag[2:0] is 3
16:14	RW	0x0	dcalt2: For a TPH/DCA request, specifies the target NodeID[2:0] when the inverted Tag[2:0] is 2
13:11	RW	0x0	dcalt1: For a TPH/DCA request, specifies the target NodeID[2:0] when the inverted Tag[2:0] is 1
10:8	RW	0x0	dcalt0: For a TPH/DCA request, specifies the target NodeID[2:0] when the inverted Tag[2:0] is 0



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x148		Function: 0	
Bit	Attr	Default	Description
0:0	RW	0x0	dcaen: When disabled, PrefetchHint will not be sent on the coherent interface. 0: Disable TPH/DCA Prefetch Hints 1: Enable TPH/DCA Prefetch Hints Notes: This register is locked based on DISDCA fuse This table is programmed by BIOS and this bit is set when the table is valid

8.6.39 cipintrc

Coherent Interface Protocol Interrupt Control.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x14c		Function: 0	
Bit	Attr	Default	Description
25:25	RW	0x0	dis_intx_route2ich:
24:24	RW	0x0	route_nmi2mca:
18:18	RW	0x0	smi_msi_en:
17:17	RW	0x0	init_msi_en:
16:16	RW	0x0	nmi_msi_en:
13:13	RW_L	0x1	ferr_mask: Note: Locked by RSPLCK
12:12	RW	0x1	a20m_mask:
11:11	RW	0x1	intr_mask:
10:10	RW	0x1	smi_mask:
9:9	RW	0x1	init_mask:
8:8	RW	0x1	nmi_mask:
7:7	RW_L	0x0	ia32_or_ipf: Note: Locked by RSPLCK
1:1	RW	0x0	logical:
0:0	RW_L	0x0	cluster_check_sampling_mode: Note: Locked by RSPLCK

8.6.40 cipintrs

Coherent Interface Protocol Interrupt Status.




This register is to be polled by BIOS to determine if internal pending system interrupts are drained out of IIO. General usage model is for software to quiesce the source e.g. IOM global error logic of a system event like SMI, then poll this register till this register indicates that the event is not pending inside IIO. One additional read is required from software, after the register first reads 0 for the associated event.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x154		Function: 0	
Bit	Attr	Default	Description
31:31	RW1CS	0x0	smi: This is set whenever IIO forwards a VLW from PCH that had the SMI bit asserted
30:30	RW1CS	0x0	nmi: This is set whenever IIO forwards a VLW from PCH that had the NMI bit asserted
7:7	RO_V	0x0	mca_ras_evt_pending:
6:6	RO_V	0x0	nmi_ras_evt_pending:
5:5	RO_V	0x0	smi_ras_evt_pending:
4:4	RO_V	0x0	intr_evt_pending:
3:3	RO_V	0x0	a20m_evt_pending:
2:2	RO_V	0x0	init_evt_pending:
1:1	RO_V	0x0	nmi_evt_pending:
0:0	RO_V	0x0	vlw_msgpend: either generated internally or externally

8.6.41 vtbar

Base Address Register for Intel VT-d.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x180		Function: 0	
Bit	Attr	Default	Description
31:13	RW_LB	0x0	vtd_chipset_base_address: Provides an aligned 8K base address for IIO registers relating to Intel VT-d. All inbound accesses to this region are completely aborted by the IIO.
0:0	RW_LB	0x0	vtd_chipset_base_address_enable: Note that accesses to registers pointed to by VTBAR are accessible via message channel or JTAG mini-port, irrespective of the setting of this enable bit i.e. even if this bit is clear, read/write to Intel VT-d registers are completed normally (writes update registers and reads return the value of the register) for accesses from message channel or JTAG mini-port. This bit is RW-LB i.e. lock is determined based on the 'trusted' bit in message channel when VTGENCTRL[15] is set, else it is RO.



8.6.42 vtgenctrl

Intel VT-d General Control.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x184		Function: 0	
Bit	Attr	Default	Description
15:15	RW_O	0x0	lockvtd: When this bit is 0, the VTBAR[0] is RW-LB, else it is RO.
7:4	RW_LB	0xa	hpa_limit: Represents the host processor addressing limit 0000: 2 ³⁶ (i.e. bits 35:0) 0001: 2 ³⁷ (i.e. bits 36:0) ... 1010: 2 ⁴⁶ (i.e. bits 45:0) When Intel VT-d translation is enabled on an Intel VT-d engine, all host addresses (during page walks) that go beyond the limit specified in this register will be aborted by IIO. Note that pass-through and 'translated' ATS accesses carry the host-address directly in the access and are subject to this check as well.
3:0	RW_LB	0x8	gpa_limit: Represents the guest virtual addressing limit for the non-Isch Intel VT-d engine. 0000: 2 ⁴⁰ (i.e. bits 39:0) 0001: 2 ⁴¹ (i.e. bits 40:0) .. 0111: 2 ⁴⁷ 1000: 2 ⁴⁸ Others: Reserved When Intel VT-d translation is enabled, all incoming guest addresses from PCI Express, associated with the non-isoch Intel VT-d engine, that go beyond the limit specified in this register will be aborted by IIO and a UR response returned. This register is not used when translation is not enabled. Note that 'translated' and 'pass-through' addresses are in the 'host-addressing' domain and NOT 'guest-addressing' domain and hence GPA_LIMIT checking on those accesses are bypassed and instead HPA_LIMIT checking applies.

8.6.43 vtgenctrl2

Intel VT-d General Control 2.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x18c		Function: 0	
Bit	Attr	Default	Description
31:19	RW_LB	0x5	<p>cr_vt_vtdgenctrl2_crount[31:19] start_fld_desc:</p> <p>[31]: VTd translation (TE or IR enable) turned off while transactions are in progress causes VTd hang. [30]: Hang in VTd due to busy bit not getting set in retry response. [29]: System hang occurs when multiple VTd faults due to programming error are generated. [28]: Non-Isoch CSRs are being used for isoch requests when isoch engine is off(TE=0). [27]: Translation request (at=01) w/ AW as rsvd is not being logged as fault [26]: VTd Translation request with R=W=0 and SP=1 gets logged in fault recording register with FR=0 [25]: VTd - SP set with page table preload error causes VTd to hang. 0: Fix enabled - recommended BIOS setting. 1: Fix disabled [24] Chicken bit to retry pre-fetch request when number of entris available for allocation is less than tlb_free_entry_limit 0: Feature disabled - recommended BIOS setting. 1: Feature enabled [23] Chicken bit to force retry on pre-fetch request 0: Feature disabled - recommended BIOS setting. 1: Feature enabled [22] Chicken bit to add 8 more entries reserved for fetch request only in IOTLB 0: Feature disabled - recommended BIOS setting. 1: Feature enabled [21:19] Select which entries in IOTLB1 should be reserved for fetch request only. Need to be set to 0x5 to disable the feature such that no entries will be reserved. others: debug mode</p>
18:12	RW_LB	0x4	<p>tlb_free_entry_limit:</p>
11:11	RW_LB	0x0	<p>lructrl:</p> <p>Controls what increments the LRU counter that is used to degrade the LRU bits in the IOTLB, L1/L2, and L3 caches. 1: Count Cycles same as TB 0: Count Requests</p>
10:7	RW_LB	0x7	<p>lt:</p> <p>Controls the rate at which the LRU buckets should degrade.</p> <p>If we are in "Request" mode (LRUCTRL = 0), then we will degrade LRU after 16 * N requests where N is the value of this field.</p> <p>If we are in "Cycles" mode (CRUCTRL = 1), then we will degrade LRU after 256 * N cycles where N is the value of this field.</p> <p>The default value of 0x7 along with LRUCTRLO will give us a default behavior of decreasing the LRU buckets every 112 requests.</p>



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x18c		Function: 0	
Bit	Attr	Default	Description
6:5	RW_LB	0x1	prefetch_control: Queued invalidation, interrupt table read, context table reads and root table reads NEVER have prefetch/snarf/reuse capability. This is a general rule. Beyond that the Prefetch Control bits control additional behavior as shown below. This field controls which Intel VT-d reads are to be considered for prefetchsnarfreuse in the Intel QPI buffers. 00: Prefetch/snarf/reuse is turned off i.e. IRP cluster never reuses the Intel VT-d read data 01: Prefetch/snarf/reuse is enabled for all leafnon-leaf Intel VT-d page walk reads. 10: Prefetch/snarf/reuse is enabled only on leaf not non-leaf Intel VT-d page walks reads with CC.ALH bit set 11: Prefetch/snarf/reuse is enabled on ALL leaf not non-leaf Intel VT-d page walks reads regardless of the setting of the CC.ALH bit
3:3	RW_LB	0x0	ignoreubitleafeviction:
2:2	RW_LB	0x0	evictnonleafat01:
1:1	RW_LB	0x0	dontevictleafat01:

8.6.44 iotlbpartition

IOTLB Partitioning Control.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x194		Function: 0	
Bit	Attr	Default	Description
28:27	RW	0x0	rangesel_dmi_20_22:
26:25	RW	0x0	rangesel_iou24_upper_x2:
24:23	RW	0x0	rangesel_iou23_upper_x2:
14:13	RW	0x0	rangesel_me:
12:11	RW	0x0	rangesel_cb:
10:9	RW	0x0	rangesel_intr:
0:0	RW_LB	0x0	iotlb_parten: 0: Disabled 1: Enabled



8.6.45 vtuncerrsts

Intel VT-d Uncorrectable Error Status.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1a8		Function: 0	
Bit	Attr	Default	Description
31:31	RW1CS	0x0	vt derr: When set, this bit is set when an Intel VT-d spec defined error has been detected (and logged in the Intel VT-d fault registers)
8:8	RW1CS	0x0	protmemviol:
7:7	RW1CS	0x0	miscerrs: Illegal request to 0xFEE, GPAHPA limit error status
6:6	RW1CS	0x0	unsucc_ci_rdcg:
5:5	RW1CS	0x0	perr_tlb1:
4:4	RW1CS	0x0	perr_tlb0:
3:3	RW1CS	0x0	perr_l3_lookup:
2:2	RW1CS	0x0	perr_l2_lookup:
1:1	RW1CS	0x0	perr_l1_lookup:
0:0	RW1CS	0x0	perr_context_cache:

8.6.46 vtuncerrmsk

Intel VT-d Uncorrectable Error Mask.

Mask out error reporting to IIO. Bit 31 should always be set to 1. We recommend that the other bits be left as zero so these internal errors are reported out.

Setting bits will not prevent any error collecting INSIDE of Intel VT-d in the Intel VT-d Fault Recording Registers.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1ac		Function: 0	
Bit	Attr	Default	Description
31:31	RWS	0x1	vt derr_msk: This bit should be set to 1 by BIOS. It is highly recommended that this bit is never set to 0. If Intel VT-d errors are configured to be fatal, leaving this bit set to 0 will cause Fatal errors to be reported when devices send illegal requests. This is generally undesirable.
8:8	RWS	0x0	protmemviol_msk:
7:7	RWS	0x0	miscerrm: Illegal request to 0xFEE, GPAHPA limit error mask
6:6	RWS	0x0	unsucc_ci_rdcg_msk:
5:5	RWS	0x0	perr_tlb1_msk:



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1ac		Function: 0	
Bit	Attr	Default	Description
4:4	RWS	0x0	perr_tlb0_msk:
3:3	RWS	0x0	perr_l3_lookup_msk:
2:2	RWS	0x0	perr_l2_lookup_msk:
1:1	RWS	0x0	perr_l1_lookup_msk:
0:0	RWS	0x0	perr_context_cache_msk:

8.6.47 vtuncerrsev

Intel VT-d Uncorrectable Error Severity.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1b0		Function: 0	
Bit	Attr	Default	Description
31:31	RWS	0x0	vtderr_sev: When set, this bit escalates reporting of Intel VT-d spec defined errors, as FATAL errors. When clear, those errors are escalated as Nonfatal errors. Setting this bit to a 1 can allow a guest VM to trigger an unrecoverable FATAL error at the platform. It is HIGHLY recommended that BIOS keep this bit set to 0, as such behavior is generally undesirable.
8:8	RWS	0x1	protmemviol_sev:
7:7	RWS	0x1	miscerrsev: Illegal request to 0xFEE, GPAHPA limit error severity
6:6	RWS	0x0	unsucc_ci_rdcv_sev:
5:5	RWS	0x1	perr_tlb1_sev:
4:4	RWS	0x1	perr_tlb0_sev:
3:3	RWS	0x1	perr_l3_lookup_sev:
2:2	RWS	0x1	perr_l2_lookup_sev:
1:1	RWS	0x1	perr_l1_lookup_sev:
0:0	RWS	0x1	perr_context_cache_sev:

8.6.48 vtuncerrptr

Intel VT-d Uncorrectable Error Pointer.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1b4		Function: 0	
Bit	Attr	Default	Description
4:0	ROS_V	0x0	vt_uncferr_ptr: This field points to which of the unmasked uncorrectable errors happened first. This field is only valid when the corresponding error is unmasked and the status bit is set and this field is rearmed to load again when the status bit indicated to by this pointer is cleared by software from 1 to 0. Value of 0x0 corresponds to bit 0 in VTUNCERRSTS register, value of 0x1 corresponds to bit 1 and so forth.



8.6.49 iiomiscctrl

IIO MISC Control.

Type: CFG Bus: 0 Offset: 0x1c0		PortID: N/A Device: 5 Function: 0	
Bit	Attr	Default	Description
42:42	RW_LB	0x0	enable_pcc_eq0_sev1:
41:41	RW	0x0	en_poismsg_spec_behavior: A received poison packet is treated as a Fatal error if its severity bit is set, but treated as a correctable if the severity bit is cleared and logged in both the UNCERRSTS register and the Advisory Non-Fatal Error bit in the CORERRSTS register. In Intel® Xeon® Processor E5 v2 product family B0, a POISFEN bit forces the poison error to be logged as an Advisory Non-Fatal error. When this bit is set, the poison severity bit can force Fatal behavior regardless of POISFEN. Generally, however, MCA needs to have priority over AER drivers, so this bit default is 0. Note that the PCIe spec requires this bit to be 0. When this bit is clear: sev pfen error 0 0 non-fatal 0 1 correctable 1 0 fatal 1 1 correctable When this bit is set: sev pfen error 0 0 non-fatal 0 1 correctable 1 0 fatal 1 1 fatal
40:40	RW	0x0	enable_io_mca:
39:39	RW	0x0	disable_new_apic_ordering: When this bit is set, behavior returns to the original behavior.
38:38	RWS_O	0x1	uniphy_en_fuse4_pwrdrn:
37:37	RW	0x0	poisfen: Enables poisoned data received inbound (either inbound posted data or completions for outbound reads that have poisoned data) to be forwarded to the destination (DRAM or Cache or PCIe Peer). 0: Poison indication is not forwarded with the data (this may result in silent corruption if AER poison reporting is disabled.) 1: Poison indication is forwarded with the data (this may result in a conflict with MCA poison reporting if AER poison reporting is enabled)



Type: CFG Bus: 0 Offset: 0x1c0		PortID: N/A Device: 5 Function: 0	
Bit	Attr	Default	Description
34:32	RWS	0x0	<p>showportid:</p> <p>A Port Identifier that identifies which PCI Express port a transaction comes from will be placed in the AD Ring TNID[2:0] field of the request packet, when enabled. This field is normally used for DCAHint and is not used for normal demand read.</p> <p>Since there are up to 11 specific ports, then Port ID is encoded in 4 bits. Only three bits can be selected to be sent in TNID as follows:</p> <p>100: TNID[2:0] = PortID[3:1] 011: TNID[2:0] = PortID[3:2, 0] 010: TNID[2:0] = PortID[3, 1:0] 001: TNID[2:0] = PortID[2:0] 000: IIO will not send Port ID information in the TNID[2:0] field</p> <p>The PortIDs are mapped as follows: 0: Device 0 Function 0 DMI PCIe port 0 (IOU2) 1: Device 1 Function 0 Port 1a x4 or x8 (IOU2) 2: Device 1 Function 1 Port 1b x4 (IOU2) 3: Device 2 Function 0 Port 2a x4, x8, or x16 (IOU0) 4: Device 2 Function 1 Port 2b x4 (IOU0) 5: Device 2 Function 2 Port 2c x4 or x8 (IOU0) 6: Device 2 Function 3 Port 2d x4 (IOU0) 7: Device 3 Function 0 Port 3a x4, x8, or x16 or NTB port x4 or x8 and x16 (IOU1) 8: Device 3 Function 1 Port 3b x4 (IOU1) 9: Device 3 Function 2 Port 3c x4 or x8 (IOU1) 10: Device 3 Function 3 Port 3d x4 (IOU1) 11: CB 12: Intel VT</p> <p>Notes: The TNID[2:0] value will be copied to the TORID[4:0] by CBo, if the packet is to be sent to the QPI port.</p>
30:30	RW	0x1	<p>treat_last_write_in_descriptor_specially:</p> <p>Treat CB DMA writes with NS = RO = 1 NS is enabled in CB DMA 'last write in descriptor', as-if NS = 1 and RO = 0 write</p>
25:25	RWS	0x1	<p>cballoccn:</p> <p>When set, use Allocating Flows for non-DCA writes from CB DMA. This bit does not affect DCA requests when DCA requests are enabled (bit 21 of this register). A DCA request is identified as matching the DCA requestor ID and having a Tag of non-zero. All DCA requests are always allocating, unless they are disabled, or unless all allocating flows are disabled (bit 24). If all allocating flows are disabled, then DCA requests are also disabled.</p> <p>BIOS is to leave this bit at default of 1b for all but DMI port. See the transaction flow chapter for when non-snoop can be enabled from CB DMA and its relationship to the setting of this bit.</p>
24:24	RW	0x0	<p>disable_all_allocating_flows:</p> <p>When this bit is set, IIO will no more issue any new inbound IDI command that can allocate into LLC. Instead, all the writes will use one of the non-allocating commands - PCIWiL/PCIWiLF/PCINSWr/PCINSWrF. Software should set this bit only when no requests are being actively issued on IDI. So either a lock/quiesce flow should be employed before this bit is set/cleared or it should be set up before DMA is enabled in system.</p>



Integrated I/O (IIO) Configuration Registers

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1c0		Function: 0	
Bit	Attr	Default	Description
22:22	RW	0x0	disable_ro_on_writes_from_cb_dma:
20:20	RW	0x0	switch_arbitration_weight_for_CB_DMA: 1
19:19	RW	0x0	rvgaen: Remote VGA Enable Enables VGA accesses to be sent to remote node. If set, accesses to the VGA region (A_0000 to B_FFFF) will be forwarded to the CBo where it will determine the node ID where the VGA region resides. It will then be forwarded to the given remote node. If clear, then VGA accesses will be forwarded to the local PCIe port that has it's VGAEN set. If none have their VGAEN set, then the request will be forwarded to the local DMI port, if operating in DMI mode. If it is not operating in DMI mode, then the request will be aborted.
18:18	RW	0x1	disable_inbound_ro_for_vc0: When enabled this mode will treat all inbound write traffic as RO = 0 for VCO. This affects all PCI Express ports and the DMI port.0 - Ordering of inbound transactions is based on RO bit for VCO 1 - RO bit is treated as '0' for all inbound VCO traffic Note that this pretty much impacts only the NS write traffic because for snooped traffic RO bit is ignored by h/w. When this bit is set, the NS write if enabled BW is going to be generally bad. Note that this bit does not impact VC1 and VCm writes
17:16	RW	0x1	dmi_vc1_write_ordering: Mode is used to control VC1 write traffic from DMI (Intel VT). 00: Reserved 01: Serialize writes on CSI issuing one at a time 10: Pipeline writes on CSI except for writes with Tag value of 0x21 which are issued only after prior writes have all completed and reached global observability 11: Pipeline writes on CSI based on RO bit i.e. if RO = 1, pipeline a write on QPI without waiting for prior write to have reached global observability. If RO0, then it needs to wait till prior writes have all reached global observability.
15:15	RW	0x0	dmi_vc1_vt_d_fetch_ordering: This mode is to allow VC1 Intel VT-d conflicts with outstanding VCO Intel VT-d reads on IDI to be pipelined. This can occur when Intel VT-d tables are shared between Intel VT (VC1) and other devices. To ensure QoS the Intel VT-d reads from VC1 need to be issued in parallel with non-Isoc accesses to the same cacheline. 0: Serialize all IDI address conflicts to DRAM 1: Pipeline Intel VT-d reads from VC1 with address conflict on IDI Notes: A maximum of 1 VC1 Intel VT-d read and 1 non-VC1 Intel VT-d read to the same address can be outstanding on IDI.
14:14	RW	0x0	pipeline_ns_writes_on_csi: When set, allows inbound non-snooped writes to pipeline at the coherent interface - issuing the writes before previous writes are completed in the coherent domain.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1c0		Function: 0	
Bit	Attr	Default	Description
13:13	RW	0x0	vc1_reads_bypass_writes: 0: VC1 Reads push VC1 writes 1: VC1 Reads are allowed to bypass VC1 writes
12:12	RW	0x0	lock_thaw_mode: Mode controls how inbound queues in the south agents (PCIe, DMI) thaw when they are target of a locked read. See xref for details on when this should be used and on the restrictions in its use. 0: Thaw only posted requests 1: Thaw posted and non-posted requests. Note that if the lock target is also a 'problematic' port (as indicated by bit 38 in MISCCTRLSTS register), then this becomes meaningless because both posted and non-posted requests are thawed.
10:10	RW	0x0	legacy_port: Sockets where the NodeID = 0 are generally identified as having the legacy DMI port. But there is still a possibility that another socket also has a NodeID = 0. The system is configured by software to route legacy transactions to the correct socket. However, inbound legacy messages received on a PCIe port of a socket with NodeID = 0 that is not the true legacy port need to be routed to a remote socket that is the true legacy port. For a local NodeID is zero, this bit is used to determine if inbound messages should be routed to a DMI port on a remote socket with NodeID = 0, or if the messages should be sent to the local DMI port, since the local NodeID is also 0. If the local NodeID is not zero, then this bit is ignored. 0: indicates this socket has the true DMI legacy port, send legacy transactions to local DMI port 1: indicates this is a non-legacy socket, send legacy transactions to the Coherent Interface Notes: This bit does not affect routing for non-message transactions. It only affects inbound messages that need to be routed to the true legacy port. This bit is NOT used for any outbound address decoderouting purposes. Outbound traffic that is subtractively decoded will always be forwarded to local DMI port, if one exists, or it will be aborted. The default value of this field is based on the NodeID and FWAGENT_DMIMODE straps. Software can only change this bit after reset during early boot phase, but must guarantee there is no traffic flowing through the system, except for the write that changes this bit.
9:9	RW	0x1	Reserved.
8:8	RW	0x0	tocmvalid: Enables the TOCM field.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1c0		Function: 0	
Bit	Attr	Default	Description
7:3	RW	0xe	<p>tocm:</p> <p>Indicates the top of Core physical addressability limit.</p> <p>00000-00100: Reserved 00101: 2³⁷ 00110: 2³⁸ ... 1110: 2⁴⁶ 01111 -11111: Reserved</p> <p>io uses this to abort all inbound transactions that cross this limit.</p>
2:2	RW	0x0	<p>en1k:</p> <p>This bit when set, enables 1K granularity for IO space decode in each of the virtual P2P bridges corresponding to root ports, and DMI ports.</p>
1:1	RWS_O	0x0	<p>uniphy_disable:</p> <p>Place entire UNIPHY in L2 for when no ports are used, as in some multi-socket configurations</p>
0:0	RW_LB	0x0	<p>enable_isa_hole:</p> <p>When this bit is set, inbound DMA accesses to the ISA Hole region are aborted by IIO. If clear, inbound DMA accesses to the ISA hole region are forwarded to dram. Refer to the Address Map chapter for more details.</p> <p>The ISA Hole is no longer supported by Intel® Xeon® Processor E5 v2 product family. This bit must never be set.</p>

8.6.50 Itdpr

Intel TXT DMA Protected Range.

General Description: This register holds the address and size of the DMA protected memory region for Intel® Trusted Execution Technology (Intel® TXT) MP usage.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x290		Function: 0	
Bit	Attr	Default	Description
31:20	RO_V	0x0	<p>topofdpr:</p> <p>Top address + 1 of DPR. This is RO, and it is copied by HW from TSEGBASE[31:20].</p>



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x290		Function: 0	
Bit	Attr	Default	Description
11:4	RW_L	0x0	<p>size:</p> <p>This is the size of memory, in MB, that will be protected from DMA accesses. A value of 0x00 in this field means no additional memory is protected. The maximum amount of memory that will be protected is 255 MB.</p> <p>The amount of memory reported in this field will be protected from all DMA accesses. The top of the protected range is typically the BASE of TSEG -1. BIOS is expected to program that in to bits 31:20 of this register.</p> <p>Notes:</p> <p>If TSEG is not enabled, then the top of this range becomes the base ME stolen space, whichever would have been the location of TSEG, assuming it had been enabled.</p> <p>The DPR range works independently of any other range - Generic Protected ranges, TSEG range, Intel VT-d tables, Intel VT-d protection ranges, MMCFG protection range and is done post any Intel VT-d translation or Intel TXT checks. Therefore incoming cycles are checked against this range after the VTd translation and faulted if they hit this protected range, even if they passed the VTd translation.</p> <p>All the memory checks are OR'ed with respect to NOT being allowed to go to memory. So if either Generic protection range, DPR, Intel VT-d, TSEG range disallows the cycle, then the cycle is not allowed to go to memory. Or in other words, all the above checks must pass before a cycle is allowed to DRAM.</p> <p>DMA remap engines are allowed to access the DPR region without any faulting. It is always legal for any DMA remap engine to read or write into the DPR region, thus DMA remap accesses must not be checked against the DPR range.</p>
2:2	RW_L	0x0	<p>commandbit:</p> <p>Writing a '1' to this bit will enable protection. Writing a '0' to this bit will disable protection.</p>
1:1	RO	0x0	<p>protregsts:</p> <p>IIO sets this bit when the protection has been enabled in hardware and for all practical purposes this should be immediate. When protection is disabled, then this bit is clear</p>
0:0	RW_O	0x0	<p>lock:</p> <p>Bits 19:0 are locked down in this register when this bit is set. Can this be set while other bits are being written to in the same write transaction</p>

8.6.51 Icfgbus_base

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x41c		Function: 0	
Bit	Attr	Default	Description
7:0	RW	0x0	Icfgbus_base:



8.6.52 lcfgbus_limit

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	5		
Offset:	0x41d				
Bit	Attr	Default	Description		
7:0	RW	0x0	lcfgbus_limit:		

8.6.53 csipintrs

Type:	CFG	PortID:	N/A	Function:	0
Bus:	0	Device:	5		
Offset:	0x450				
Bit	Attr	Default	Description		
7:7	RO_V	0x0	mca_ras_evt_pend:		
6:6	RO_V	0x0	nmi_ras_evt_pend:		
5:5	RO_V	0x0	smi_ras_evt_pend:		
4:4	RO_V	0x0	intr_evt_pend:		
3:3	RO_V	0x0	a20m_evt_pend:		
2:2	RO_V	0x0	init_evt_pend:		
1:1	RO_V	0x0	nmi_evt_pend:		
0:0	RO_V	0x0	smi_evt_pend:		

8.7 Device 5 Function 0 MMIO Region VTBAR

Intel VT-d registers are all addressed using aligned dword or aligned qword accesses. Any combination of bits is allowed within a dword or qword access. The Intel VT-d remap engine registers corresponding to the port represented by Device 0, occupy the first 4 K of offset starting from the base address defined by VTBAR register.

Register Name	Offset	Size
vtd0_version	0x0	32
vtd0_cap	0x8	64
vtd0_ext_cap	0x10	64
vtd0_glbcmd	0x18	32
vtd0_glbsts	0x1c	32
vtd0_rootentryadd	0x20	64
vtd0_ctxcmd	0x28	64
vtd0fltsts	0x34	32
nonisoch_fltvtctrl	0x38	32
nonisoch_fltvtdata	0x3c	32
vtd0_fltvtaddr	0x40	32
vtd0_fltvtupraddr	0x44	32
vtd0_pmen	0x64	32



Register Name	Offset	Size
vtd0_prot_low_mem_base	0x68	32
vtd0_prot_low_mem_limit	0x6c	32
vtd0_prot_high_mem_base	0x70	64
vtd0_prot_high_mem_limit	0x78	64
vtd0_inv_queue_head	0x80	64
vtd0_inv_queue_tail	0x88	64
vtd0_inv_queue_add	0x90	64
vtd0_inv_comp_status	0x9c	32
nonisoch_inv_cmp_evtctrl	0xa0	32
nonisoch_invevtdata	0xa4	32
vtd0_inv_comp_evt_addr	0xa8	32
vtd0_inv_comp_evt_upraddr	0xac	32
vtd0_intr_remap_table_base	0xb8	64
vtd0_filtrec0_gpa	0x100	64
vtd0_filtrec0_src	0x108	64
vtd0_filtrec1_gpa	0x110	64
vtd0_filtrec1_src	0x118	64
vtd0_filtrec2_gpa	0x120	64
vtd0_filtrec2_src	0x128	64
vtd0_filtrec3_gpa	0x130	64
vtd0_filtrec3_src	0x138	64
vtd0_filtrec4_gpa	0x140	64
vtd0_filtrec4_src	0x148	64
vtd0_filtrec5_gpa	0x150	64
vtd0_filtrec5_src	0x158	64
vtd0_filtrec6_gpa	0x160	64
vtd0_filtrec6_src	0x168	64
vtd0_filtrec7_gpa	0x170	64
vtd0_filtrec7_src	0x178	64
vtd0_invaddrreg	0x200	64
vtd0_iotlbinv	0x208	64
vtd1_version	0x1000	32
vtd1_cap	0x1008	64
vtd1_ext_cap	0x1010	64
vtd1_glbcmd	0x1018	32
vtd1_glbsts	0x101c	32
vtd1_rootentryadd	0x1020	64
vtd1_ctxcmd	0x1028	64
vtd1_filtsts	0x1034	32
vtd1_fltvtaddr	0x1040	32
vtd1_fltvtupraddr	0x1044	32
vtd1_pmen	0x1064	32
vtd1_prot_low_mem_base	0x1068	32



Register Name	Offset	Size
vtd1_prot_low_mem_limit	0x106c	32
vtd1_prot_high_mem_base	0x1070	64
vtd1_prot_high_mem_limit	0x1078	64
vtd1_inv_queue_head	0x1080	64
vtd1_inv_queue_tail	0x1088	64
vtd1_inv_queue_add	0x1090	64
vtd1_inv_comp_status	0x109c	32
vtd1_inv_comp_evt_addr	0x10a8	32
vtd1_inv_comp_evt_upraddr	0x10ac	32
vtd1_intr_remap_table_base	0x10b8	64
vtd1_fltrec0_gpa	0x1100	64
vtd1_fltrec0_src	0x1108	64
vtd1_invaddrreg	0x1200	64
vtd1_iotlbinv	0x1208	64

8.7.1 vtd[0:1]_version

Intel VT-d Version Number.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x0, 0x1000		Function: 0	
Bit	Attr	Default	Description
7:4	RO	0x1	major_revision:
3:0	RO	0x0	minor_revision:

8.7.2 vtd[0:1]_cap

Intel VT-d Capabilities.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x8, 0x1008		Function: 0	
Bit	Attr	Default	Description
55:55	RO	0x1	dma_read_draining: The processor supports hardware based draining
54:54	RO	0x1	dma_write_draining: The processor supports hardware based write draining
53:48	RO	0x12	mamv: The processor support MAMV value of 12h (up to 1G super pages).
47:40	RO	0x7	number_of_fault_recording_registers: The processor supports 8 fault recording registers
39:39	RO	0x1	page_selective_invalidation: Supported in IIO



Type: MEM		PortID: 8'h7e		Function: 0	
Bus: 0		Device: 5			
Offset: 0x8, 0x1008					
Bit	Attr	Default	Description		
37:34	RW_O	0x3	super_page_support: 2 MB, 1G supported.		
33:24	RO	0x10	fault_recording_register_offset: Fault registers are at offset 100h		
23:23	RO	0x0	spatial_separation:		
22:22	RO	0x1	zlr: Zero-length DMA requests to write-only pages supported.		
21:16	RO_V	0x2f	mgaw: This register is set by the processor-based on the setting of the GPA_LIMIT register. The value is the same for both the Intel VT and non-Intel VT engines. This is because the translation for Intel VT has been extended to be 4-level (instead of 3).		
12:8	RO	0x4	sagaw: Supports 4-level walk on both Intel VT and non-Intel VT engines		
7:7	RO	0x0	tcm: The processor does not cache invalid pages. This bit should always be set to 0 on HW. It can be set to one when we are doing software virtualization of Intel VT-d.		
6:6	RO	0x1	phmr_support: The processor supports protected high memory range		
5:5	RO	0x1	plmr_support: The processor supports protected low memory range \		
4:4	RO	0x0	rwbfi:		
3:3	RO	0x0	advanced_fault_logging: The processor does not support advanced fault logging		
2:0	RO	0x6	number_of_domains_supported: The processor supports 256 domains with 8 bit domain ID		

8.7.3 vtd[0:1]_ext_cap

Extended Intel VT-d Capability.

Type: MEM		PortID: 8'h7e		Function: 0	
Bus: 0		Device: 5			
Offset: 0x10, 0x1010					
Bit	Attr	Default	Description		
23:20	RO	0xf	maximum_handle_mask_value: IIO supports all 16 bits of handle being masked. Note IIO always performs global interrupt entry invalidation on any interrupt cache invalidation command and h/w never really looks at the mask value.		
17:8	RO	0x20	invalidation_unit_offset: IIO has the invalidation registers at offset 200h		
7:7	RO	0x1	snoop_control: 0: Hardware does not support 1-setting of the SNP field in the page-table entries. 1: Hardware supports the 1-setting of the SNP field in the page-table entries. IIO supports snoop override only for the non-isoch Intel VT-d engine		



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x10, 0x1010		Function: 0	
Bit	Attr	Default	Description
6:6	RO	0x1	pass_through: IIO supports pass through. This bit is RW-O for defeaturing in case of post-si bugs.
4:4	RW_O	0x1	ia32_extended_interrupt_mode: IIO supports the extended interrupt mode
3:3	RO	0x1	interrupt_remapping_support: IIO supports this
2:2	RW_O	0x1	device_tlb_support: IIO supports ATS for the non-isoch Intel VT-d engine. This bit is RW-O for non-isoch engine in case we might have to defeature ATS post-si. For VTD[0]_EXT_CAP.Bit[2] the default is 1, but can be programmed to 0. Clarification: For VTD[1]_EXT_CAP.Bit[2] the default is 0
1:1	RO	0x1	queued_invalidation_support: IIO supports this For VTD[1]_EXT_CAP.Bit[1] the default is 0.
0:0	RW_O	0x0	coherency_support: BIOS can write to this bit to indicate to hardware to either snoop or not-snoop the DMA/Interrupt table structures in memory (root/context/pd/pt/irt). Note that this bit is expected to be always set to 0 for the Intel VT-d engine and programmability is only provided for that engine for debug reasons.

8.7.4 vtd[0:1]_glbcmd

Intel VT-d Global Command.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x18, 0x1018		Function: 0	
Bit	Attr	Default	Description
31:31	RW	0x0	translation_enable: Software writes to this field to request hardware to enable/disable DMA-remapping hardware.0: Disable DMA-remapping hardware 1: Enable DMA-remapping hardware Hardware reports the status of the translation enable operation through the TES field in the Global Status register. Before enabling (or re-enabling) DMA-remapping hardware through this field, software must: - Setup the DMA-remapping structures in memory - Flush the write buffers (through WBF field), if write buffer flushing is reported as required. - Set the root-entry table pointer in hardware (through SRTP field). - Perform global invalidation of the context-cache and global invalidation of IOTLB - If advanced fault logging supported, setup fault log pointer (through SFL field) and enable advanced fault logging (through EAFL field). There may be active DMA requests in the platform when software updates this field. Hardware must enable or disable remapping logic only at deterministic transaction boundaries, so that any in-flight transaction is either subject to remapping or not at all.



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x18, 0x1018		Function: 0	
Bit	Attr	Default	Description
30:30	RW_V	0x0	<p>set_root_table_pointer:</p> <p>Software sets this field to set/update the root-entry table pointer used by hardware. The root-entry table pointer is specified through the Root-entry Table Address register. Hardware reports the status of the root table pointer set operation through the RTPS field in the Global Status register. The root table pointer set operation must be performed before enabling or re-enabling (after disabling) DMA remapping hardware.</p> <p>After a root table pointer set operation, software must globally invalidate the context cache followed by global invalidate of IOTLB. This is required to ensure hardware uses only the remapping structures referenced by the new root table pointer, and not any stale cached entries. While DMA-remapping hardware is active, software may update the root table pointer through this field. However, to ensure valid in-flight DMA requests are deterministically remapped, software must ensure that the structures referenced by the new root table pointer are programmed to provide the same remapping results as the structures referenced by the previous root table pointer.</p> <p>Clearing this bit has no effect.</p>
29:29	RO	0x0	set_fault_log_pointer:
28:28	RO	0x0	enable_advanced_fault_logging:
27:27	RO	0x0	write_buffer_flush:
26:26	RW	0x0	<p>queued_invalidation_enable:</p> <p>Software writes to this field to enable queued invalidations. 0: Disable queued invalidations. In this case, invalidations must be performed through the Context Command and IOTLB Invalidation Unit registers.</p> <p>1: Enable use of queued invalidations. Once enabled, all invalidations must be submitted through the invalidation queue and the invalidation registers cannot be used till the translation has been disabled. The invalidation queue address register must be initialized before enabling queued invalidations. Also software must make sure that all invalidations submitted prior via the register interface are all completed before enabling the queued invalidation interface.</p> <p>Hardware reports the status of queued invalidation enable operation through QIES field in the Global Status register. Value returned on read of this field is undefined.</p>
25:25	RW	0x0	<p>interrupt_remapping_enable:</p> <p>0: Disable Interrupt Remapping Hardware 1: Enable Interrupt Remapping Hardware</p> <p>Hardware reports the status of the interrupt-remap enable operation through the IRES field in the Global Status register.</p> <p>Before enabling (or re-enabling) Interrupt-remapping hardware through this field, software must:</p> <ul style="list-style-type: none"> • Setup the interrupt-remapping structures in memory • Set the Interrupt Remap table pointer in hardware (through IRTP field). • Perform global invalidation of IOTLB <p>There may be active interrupt requests in the platform when software updates this field. Hardware must enable or disable remapping logic only at deterministic transaction boundaries, so that any in-flight interrupts are either subject to remapping or not at all. IIO must drain any in-flight translated DMA read/write, MSI interrupt requests queued within the root complex before completing the translation enable command and reflecting the status of the command through the IRES field in the GSTS_REG. Value returned on read of this field is undefined.</p>



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x18, 0x1018		Function: 0	
Bit	Attr	Default	Description
24:24	RW_V	0x0	<p>set_interrupt_remap_table_pointer:</p> <p>Software sets this field to set/update the interrupt remapping table pointer used by hardware. The interrupt remapping table pointer is specified through the Interrupt Remapping Table Address register. Hardware reports the status of the interrupt remapping table pointer set operation through the IRTPS field in the Global Status register.</p> <p>The interrupt remap table pointer set operation must be performed before enabling or re-enabling (after disabling) interrupt remapping hardware through the IRE field.</p> <p>After an interrupt remap table pointer set operation, software must globally invalidate the interrupt entry cache. This is required to ensure hardware uses only the interrupt remapping entries referenced by the new interrupt remap table pointer, and not any stale cached entries.</p> <p>While interrupt remapping is active, software may update the interrupt remapping table pointer through this field. However, to ensure valid in-flight interrupt requests are deterministically remapped, software must ensure that the structures referenced by the new interrupt remap table pointer are programmed to provide the same remapping results as the structures referenced by the previous interrupt remap table pointer. Clearing this bit has no effect. IIO hardware internally clears this field before the 'set' operation requested by software has take effect.</p>
23:23	RW	0x0	<p>cfi:</p> <p>Compatibility Format Interrupt</p> <p>Software writes to this field to enable or disable Compatibility Format interrupts on Intel® 64 platforms. The value in this field is effective only when interrupt-remapping is enabled and Legacy Interrupt Mode is active.</p> <p>0: Block Compatibility format interrupts.</p> <p>1: Process Compatibility format interrupts as pass-through (bypass interrupt remapping).</p> <p>Hardware reports the status of updating this field through the CFIS field in the Global Status register.</p> <p>This field is not implemented on Itanium® platforms.</p>

8.7.5 vtd[0:1]_glbsts

Intel VT-d Global Status.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x1c, 0x101c		Function: 0	
Bit	Attr	Default	Description
31:31	RO_V	0x0	<p>translation_enable_status:</p> <p>When set, indicates that translation hardware is enabled and when clear indicates the translation hardware is not enabled.</p>
30:30	RO_V	0x0	<p>set_root_table_pointer_status:</p> <p>This field indicates the status of the root- table pointer in hardware. This field is cleared by hardware when software sets the SRTP field in the Global Command register. This field is set by hardware when hardware finishes the set root-table pointer operation (by performing an implicit global invalidation of the context-cache and IOTLB, and setting/updating the root-table pointer in hardware with the value provided in the Root-Entry Table Address register).</p>
29:29	RO	0x0	<p>set_fault_log_pointer_status:</p>



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x1c, 0x101c		Function: 0	
Bit	Attr	Default	Description
28:28	RO	0x0	advanced_fault_logging_status:
27:27	RO	0x0	write_buffer_flush_status:
26:26	RO_V	0x0	queued_invalidation_interface_status: IIO sets this bit once it has completed the software command to enable the queued invalidation interface. Till then this bit is 0.
25:25	RO_V	0x0	interrupt_remapping_enable_status: OH sets this bit once it has completed the software command to enable the interrupt remapping interface. Till then this bit is 0.
24:24	RO_V	0x0	interrupt_remapping_table_pointer_status: This field indicates the status of the interrupt remapping table pointer in hardware. This field is cleared by hardware when software sets the SIRTTP field in the Global Command register. This field is set by hardware when hardware completes the set interrupt remap table pointer operation using the value provided in the Interrupt Remapping Table Address register.
23:23	RO_V	0x0	cfis: Compatibility Format Interrupt Status The value reported in this field is applicable only when interrupt-remapping is enabled and Legacy interrupt mode is active. 0: Compatibility format interrupts are blocked. 1: Compatibility format interrupts are processed as pass-through (bypassing interrupt remapping).

8.7.6 vtd[0:1]_rootentryadd

Intel VT-d Root Entry Table Address.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x20, 0x1020		Function: 0	
Bit	Attr	Default	Description
63:12	RW	0x0	root_entry_table_base_address: 4K aligned base address for the root entry table. Software specifies the base address of the root-entry table through this register, and enables it in hardware through the SRTP field in the Global Command register. Reads of this register returns value that was last programmed to it.

8.7.7 vtd[0:1]_ctxcmd

Intel VT-d Context Command.



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x28, 0x1028		Function: 0	
Bit	Attr	Default	Description
63:63	RW_V	0x0	<p>icc:</p> <p>Invalidate Context Entry Cache</p> <p>Software requests invalidation of context-cache by setting this field. Software must also set the requested invalidation granularity by programming the CIRG field. Software must read back and check the ICC field to be clear to confirm the invalidation is complete. Software must not update this register when this field is set. Hardware clears the ICC field to indicate the invalidation request is complete. Hardware also indicates the granularity at which the invalidation operation was performed through the CAIG field. Software must not submit another invalidation request through this register while the ICC field is set. Software must submit a context cache invalidation request through this field only when there are no invalidation requests pending at this DMA-remapping hardware unit. Since information from the context-cache may be used by hardware to tag IOTLB entries, software must perform domain-selective (or global) invalidation of IOTLB after the context cache invalidation has completed.</p>
62:61	RW	0x0	<p>cirg:</p> <p>Context Invalidation Request Granularity</p> <p>When requesting hardware to invalidate the context-entry cache (by setting the ICC field), software writes the requested invalidation granularity through this field. Following are the encoding for the 2-bit IRG field.</p> <p>00: Reserved. Hardware ignores the invalidation request and reports invalidation complete by clearing the ICC field and reporting 00 in the CAIG field.</p> <p>01: Global Invalidation request.</p> <p>10: Domain-selective invalidation request. The target domain-id must be specified in the DID field.</p> <p>11: Device-selective invalidation request. The target SID must be specified in the SID field, and the domain-id (programmed in the context-entry for this device) must be provided in the DID field. The processor aliases the h/w behavior for this command to the 'Domain-selective invalidation request'.</p> <p>Hardware indicates completion of the invalidation request by clearing the ICC field. At this time, hardware also indicates the granularity at which the actual invalidation was performed through the CAIG field.</p>
60:59	RO_V	0x0	<p>caig:</p> <p>Context Actual Invalidation Granularity</p> <p>Hardware reports the granularity at which an invalidation request was processed through the CAIG field at the time of reporting invalidation completion (by clearing the ICC field). The following are the encoding for the 2-bit CAIG field. 00: Reserved. This is the value on reset.</p> <p>01: Global Invalidation performed. The processor sets this in response to a global invalidation request.</p> <p>10: Domain-selective invalidation performed using the domain-id that was specified by software in the DID field. The processor set this in response to a domain-selective or device-selective invalidation request.</p> <p>11: Device-selective invalidation. The processor never sets this encoding.</p>
33:32	RW	0x0	<p>fm:</p> <p>Function Mask</p> <p>Used by the processor when performing device selective invalidation.</p>
31:16	RW	0x0	<p>source_id:</p> <p>Used by the processor when performing device selective context cache invalidation</p>



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x28, 0x1028		Function: 0	
Bit	Attr	Default	Description
15:0	RW	0x0	<p>domain_id:</p> <p>Indicates the id of the domain whose context-entries needs to be selectively invalidated. S/W needs to program this for both domain and device selective invalidates. The processor ignores bits 15:8 since it supports only a 8 bit Domain ID.</p>

8.7.8 vtd[0:1]_fltsts

Intel VT-d Fault Status.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x34, 0x1034		Function: 0	
Bit	Attr	Default	Description
15:8	ROS_V	0x0	<p>fault_record_index:</p> <p>This field is valid only when the Primary Fault Pending field is set. This field indicates the index (from base) of the fault recording register to which the first pending fault was recorded when the Primary Fault pending field was set by hardware.</p>
6:6	RW1CS	0x0	<p>invalidation_timeout_error:</p> <p>Hardware detected a Device-IOTLB invalidation completion time-out. At this time, a fault event may be generated based on the programming of the Fault Event Control register.</p>
5:5	RW1CS	0x0	<p>invalidation_completion_error:</p> <p>Hardware received an unexpected or invalid Device-IOTLB invalidation completion. At this time, a fault event is generated based on the programming of the Fault Event Control register.</p>
4:4	RW1CS	0x0	<p>invalidation_queue_error:</p> <p>Hardware detected an error associated with the invalidation queue. For example, hardware detected an erroneous or un-supported Invalidation Descriptor in the Invalidation Queue. At this time, a fault event is generated based on the programming of the Fault Event Control register.</p>
1:1	ROS_V	0x0	<p>primary_fault_pending:</p> <p>This field indicates if there are one or more pending faults logged in the fault recording registers. Hardware computes this field as the logical OR of Fault (F) fields across all the fault recording registers of this DMA-remap hardware unit. 0: No pending faults in any of the fault recording registers 1: One or more fault recording registers has pending faults. The fault recording index field is updated by hardware whenever this field is set by hardware. Also, depending on the programming of fault event control register, a fault event is generated when hardware sets this field.</p>
0:0	RW1CS	0x0	<p>primary_fault_overflow:</p> <p>Hardware sets this bit to indicate overflow of fault recording registers</p>

8.7.9 nonisoch_fltvctrl

Fault Event Control.



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x38		Function: 0	
Bit	Attr	Default	Description
31:31	RW	0x1	<p>fault_nonisochn_msgmsk:</p> <p>1: Hardware is prohibited from issuing interrupt message requests.</p> <p>0: Software has cleared this bit to indicate interrupt service is available.</p> <p>When a faulting condition is detected, hardware may issue an interrupt request (using the fault event data and fault event address register values) depending on the state of the interrupt mask and interrupt pending bits.</p>
30:30	RO_V	0x0	<p>fault_nonisochn_msi_pend:</p> <p>Hardware sets the IP field whenever it detects an interrupt condition. Interrupt condition is defined as when an interrupt condition occurs when hardware records a fault through one of the Fault Recording registers and sets the PPF field in Fault Status register. - Hardware detected error associated with the Invalidation Queue, setting the IQE field in the Fault Status register.</p> <p>- Hardware detected invalidation completion timeout error, setting the ICT field in the Fault Status register.</p> <p>- If any of the above status fields in the Fault Status register was already set at the time of setting any of these fields, it is not treated as a new interrupt condition.</p> <p>The IP field is kept set by hardware while the interrupt message is held pending. The interrupt message could be held pending due to interrupt mask (IM field) being set, or due to other transient hardware conditions.</p> <p>The IP field is cleared by hardware as soon as the interrupt message pending condition is serviced. This could be due to either</p> <p>(a) Hardware issuing the interrupt message due to either change in the transient hardware condition that caused interrupt message to be held pending or due to software clearing the IM field.</p> <p>(b) Software servicing all the pending interrupt status fields in the Fault Status register.</p> <ul style="list-style-type: none"> • PPF field is cleared by hardware when it detects all the Fault Recording registers have Fault (F) field clear. • Other status fields in the Fault Status register is cleared by software writing back the value read from the respective fields.
29:0	RO	0x0	fault_nonisochn_msgmsk_const:

8.7.10 nonisochn_fltevtdata

Fault Event Data.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x3c		Function: 0	
Bit	Attr	Default	Description
31:16	RO	0x0	fault_nonisochn_data_const:
15:0	RW	0x0	fault_nonisochn_data:



8.7.11 vtd[0:1]_fltevtaddr

Intel VT-d Fault Event Address.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x40, 0x1040		Function: 0	
Bit	Attr	Default	Description
31:2	RW	0x0	interrupt_address: The interrupt address is interpreted as the address of any other interrupt from a PCI Express port.
1:0	RO	0x0	Reserved (Rsvd): Reserved.

8.7.12 vtd[0:1]_fltevtupraddr

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x44, 0x1044		Function: 0	
Bit	Attr	Default	Description
31:0	RW	0x0	address:

8.7.13 vtd[0:1]_pmen

Intel VT-d Protect Memory Enable.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x64, 0x1064		Function: 0	
Bit	Attr	Default	Description
31:31	RW	0x0	protmemen: Enable Protected Memory PROT_LOW_BASE/LIMIT and PROT_HIGH_BASE/LIMIT memory regions. Software can use the protected low/high address ranges to protect both the DMA remapping tables and the interrupt remapping tables. There is no separate set of registers provided for each.
0:0	RO_V	0x0	protregionsts: This bit is set by the processor whenever it has completed enabling the protected memory region per the rules stated in the Intel VT-d spec



8.7.14 vtd[0:1]_prot_low_mem_base

Intel VT-d Protected Memory Low Base.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x68, 0x1068		Function: 0	
Bit	Attr	Default	Description
31:21	RW	0x0	addr: 16 MB aligned base address of the low protected DRAM region Note that Intel VT-d engine generated reads/writes (page walk, interrupt queue, invalidation queue read, invalidation status) themselves are allowed toward this region, but no DMA accesses (non-translated DMA or ATS translated DMA or pass through DMA, that is, no DMA access of any kind) from any device is allowed toward this region (regardless of whether TE is 0 or 1), when enabled.

8.7.15 vtd[0:1]_prot_low_mem_limit

Intel VT-d Protected Memory Low Limit.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x6c, 0x106c		Function: 0	
Bit	Attr	Default	Description
31:21	RW	0x0	addr: 16 MB aligned limit address of the low protected DRAM region Note that Intel VT-d engine generated reads/writes (page walk, interrupt queue, invalidation queue read, invalidation status) themselves are allowed toward this region, but no DMA accesses (non-translated DMA or ATS translated DMA or pass through DMA, that is, no DMA access of any kind) from any device is allowed toward this region (regardless of whether TE is 0 or 1) when enabled.

8.7.16 vtd[0:1]_prot_high_mem_base

Intel VT-d Protected Memory High Base.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x70, 0x1070		Function: 0	
Bit	Attr	Default	Description
63:21	RW	0x0	addr: 16 MB aligned base address of the high protected DRAM region Note that Intel VT-d engine generated reads/writes (page walk, interrupt queue, invalidation queue read, invalidation status) themselves are allowed toward this region, but no DMA accesses (non-translated DMA or ATS translated DMA or pass through DMA, that is, no DMA access of any kind) from any device is allowed toward this region (regardless of whether TE is 0 or 1) when enabled.



8.7.17 vtd[0:1]_prot_high_mem_limit

Intel VT-d Protected Memory High Limit.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x78, 0x1078		Function: 0	
Bit	Attr	Default	Description
63:21	RW	0x0	<p>addr:</p> <p>16 MB aligned limit address of the high protected DRAM region</p> <p>Note that Intel VT-d engine generated reads/writes (page walk, interrupt queue, invalidation queue read, invalidation status) themselves are allowed toward this region, but no DMA accesses (non-translated DMA or ATS translated DMA or pass through DMA, that is, no DMA access of any kind) from any device is allowed toward this region (regardless of whether TE is 0 or 1), when enabled.</p>

8.7.18 vtd[0:1]_inv_queue_head

Intel VT-d Invalidation Queue Header Pointer.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x80, 0x1080		Function: 0	
Bit	Attr	Default	Description
18:4	RO_V	0x0	<p>queue_head:</p> <p>Specifies the offset (128-bit aligned) to the invalidation queue for the command that will be fetched next by hardware. This field is incremented after the command has been fetched successfully and has been verified to be a valid/supported command.</p>

8.7.19 vtd[0:1]_inv_queue_tail

Intel VT-d Invalidation Queue Tail Pointer.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x88, 0x1088		Function: 0	
Bit	Attr	Default	Description
18:4	RW	0x0	<p>queue_tail:</p> <p>Specifies the offset (128-bit aligned) to the invalidation queue for the command that will be written next by software.</p>



8.7.20 vtd[0:1]_inv_queue_add

Intel VT-d Invalidation Queue Address.

Type:	MEM	PortID:	8'h7e	Function:	0
Bus:	0	Device:	5		
Offset:	0x90, 0x1090				
Bit	Attr	Default	Description		
63:12	RW	0x0	invreq_queue_base_address: This field points to the base of size-aligned invalidation request queue.		
2:0	RW	0x0	queue_size: This field specifies the length of the invalidation request queue. The number of entries in the invalidation queue is defined as $2^{(X + 8)}$, where X is the value programmed in this field.		

8.7.21 vtd[0:1]_inv_comp_status

Intel VT-d Invalidation Completion Status.

Type:	MEM	PortID:	8'h7e	Function:	0
Bus:	0	Device:	5		
Offset:	0x9c, 0x109c				
Bit	Attr	Default	Description		
0:0	RW1CS	0x0	invalidation_wait_descriptor_complete: Indicates completion of Invalidation Wait Descriptor with Interrupt Flag (IF) field set. Hardware clears this field whenever it is executing a wait descriptor with IF field set and sets this bit when the descriptor is complete.		

8.7.22 nonisoch_inv_cmp_evtctrl

Invalidation Completion Event Control.

Type:	MEM	PortID:	8'h7e	Function:	0
Bus:	0	Device:	5		
Offset:	0xa0				
Bit	Attr	Default	Description		
31:31	RW	0x1	inval_nonisoch_msgmsk: 0: No masking of interrupt. When a invalidation event condition is detected, hardware issues an interrupt message (using the Invalidation Event Data & Invalidation Event Address register values). 1: This is the value on reset. Software may mask interrupt message generation by setting this field. Hardware is prohibited from sending the interrupt message when this field is set.		



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0xa0		Function: 0	
Bit	Attr	Default	Description
30:30	RO_V	0x0	inval_nonisoch_msi_pend: Hardware sets the IP field whenever it detects an interrupt condition. Interrupt condition is defined as: - An Invalidation Wait Descriptor with Interrupt Flag (IF) field set completed, setting the IWC field in the Fault Status register. - If the IWC field in the Invalidation Event Status register was already set at the time of setting this field, it is not treated as a new interrupt condition. The IP field is kept set by hardware while the interrupt message is held pending. The interrupt message could be held pending due to interrupt mask (IM field) being set, or due to other transient hardware conditions. The IP field is cleared by hardware as soon as the interrupt message pending condition is serviced. This could be due to either: (a) Hardware issuing the interrupt message due to either change in the transient hardware condition that caused interrupt message to be held pending or due to software clearing the IM field. (b) Software servicing the IWC field in the Fault Status register.
29:0	RO	0x0	inval_nonisoch_msgmsk_const:

8.7.23 nonisoch_invevtdata

Invalidation Event Data.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0xa4		Function: 0	
Bit	Attr	Default	Description
31:16	RO	0x0	inval_nonisoch_data_const:
15:0	RW	0x0	inval_nonisoch_data:

8.7.24 vtd[0:1]_inv_comp_evt_addr

Intel VT-d Invalidation Completion Event Address.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0xa8, 0x10a8		Function: 0	
Bit	Attr	Default	Description
31:2	RW	0x0	interrupt_address:
1:0	RO	0x0	reserved: 1



8.7.25 vtd[0:1]_inv_comp_evt_upraddr

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0xac, 0x10ac		Function: 0	
Bit	Attr	Default	Description
31:0	RW	0x0	address:

8.7.26 vtd[0:1]_intr_remap_table_base

Intel VT-d Interrupt Remapping Table Based Address.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0xb8, 0x10b8		Function: 0	
Bit	Attr	Default	Description
63:12	RW	0x0	intr_remap_base: This field points to the base of page-aligned interrupt remapping table. If the Interrupt Remapping Table is larger than 4 KB in size, it must be size-aligned. Reads of this field returns value that was last programmed to it.
11:11	RW_LB	0x0	ia32_extended_interrupt_enable: 0: IA32 system is operating in legacy IA32 interrupt mode. Hardware interprets only 8-bit APICID in the Interrupt Remapping Table entries. 1: IA32 system is operating in extended IA32 interrupt mode. Hardware interprets 32-bit APICID in the Interrupt Remapping Table entries.
3:0	RW	0x0	size: This field specifies the size of the interrupt remapping table. The number of entries in the interrupt remapping table is $2^{(X+1)}$, where X is the value programmed in this field.

8.7.27 vtd0_fltrec[0:7]_gpa, vtd1_fltrec0_gpa

Intel VT-d Fault Record.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: vtd0: 0x110, 0x120, 0x130, 0x140, 0x150, 0x160, 0x170 vtd1: 0x1100		Function: 0	
Bit	Attr	Default	Description
63:12	ROS_V	0x0	gpa: 4K aligned GPA for the faulting transaction. valid only when F field is set.



8.7.28 vtd0_filtrec[0:7]_src, vtd1_filtrec0_src

Intel VT-d Fault Record.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: vtd0: 0x108, 0x118, 0x128, 0x138, 0x148, 0x158, 0x168, 0x178		Function: 0	
vtd1: 0x1108			
Bit	Attr	Default	Description
63:63	RW1CS	0x0	f: Fault. Hardware sets this field to indicate a fault is logged in this fault recording register. The F field is set by hardware after the details of the fault is recorded in the PADDR, SID, FR and T fields. When this field is set, hardware may collapse additional faults from the same requestor (SID). Software writes the value read from this field to clear it.
62:62	ROS_V	0x0	type: Type of the first faulted DMA request 0: DMA write 1: DMA read request This field is only valid when Fault (F) bit is set.
61:60	ROS_V	0x0	address_type: This field captures the AT field from the faulted DMA request. This field is valid only when the F field is set.
39:32	ROS_V	0x0	fault_reason: Reason for the first translation fault. See Intel VT-d spec for details. This field is only valid when Fault bit is set.
15:0	ROS_V	0x0	source_identifier: Requester ID of the dma request that faulted. Valid only when F bit is set

8.7.29 vtd[0:1]_invaddrreg

Intel VT-d Invalidate Address.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x200, 0x1200		Function: 0	
Bit	Attr	Default	Description
63:12	RW	0x0	addr: To request a page-specific invalidation request to hardware, software must first write the corresponding guest physical address to this register, and then issue a page-specific invalidate command through the IOTLB_REG.
6:6	RW	0x0	ih: The field provides hint to hardware to preserve or flush the respective non-leaf page-table entries that may be cached in hardware. 0: Software may have modified both leaf and non-leaf page-table entries corresponding to mappings specified in the ADDR and AM fields. On a page-selective invalidation request, IIO must flush both the cached leaf and nonleaf page-table entries corresponding to mappings specified by ADDR and AM fields. IIO performs a domain-level invalidation on non-leaf entries and page-selective-domain-level invalidation at the leaf level 1: Software has not modified any non-leaf page-table entries corresponding to mappings specified in the ADDR and AM fields. On a page-selective invalidation request, IIO preserves the cached non-leaf page-table entries corresponding to mappings specified by ADDR and AM fields and performs only a page-selective invalidation at the leaf level



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x200, 0x1200		Function: 0	
Bit	Attr	Default	Description
5:0	RW	0x0	am: IIO supports values of 0-9. All other values result in undefined results.

8.7.30 vtd[0:1]_iotlbinv

Intel VT-d IOTLB Invalidate.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x208, 0x1208		Function: 0	
Bit	Attr	Default	Description
63:63	RW_V	0x0	Intel VT: Invalidate IOTLB cache Software requests IOTLB invalidation by setting this field. Software must also set the requested invalidation granularity by programming the IIRG field. Hardware clears the Intel VT field to indicate the invalidation request is complete. Hardware also indicates the granularity at which the invalidation operation was performed through the IAIG field. Software must read back and check the CPU field to be clear to confirm the invalidation is complete. When CPU field is set, software must not update the contents of this register (and Invalidate Address register, if it is being used), nor submit new IOTLB invalidation requests.
62:62	RO	0x0	rsz2: Reserved.
61:60	RW	0x0	iirg: IOTLB Invalidation Request Granularity When requesting hardware to invalidate the I/OTLB (by setting the Intel VT field), software writes the requested invalidation granularity through this IIRG field. Following are the encoding for the 2-bit IIRG field. 00: Reserved. Hardware ignores the invalidation request and reports invalidation complete by clearing the Intel VT field and reporting 00 in the AIG field. 01: Global Invalidation request. 10: Domain-selective invalidation request. The target domain-id must be specified in the DID field. 11: Page-selective invalidation request. The target address, mask and invalidation hint must be specified in the Invalidate Address register, the domain-id must be provided in the DID field.
59:59	RO	0x0	rsz1: Reserved.



Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x208, 0x1208		Function: 0	
Bit	Attr	Default	Description
58:57	RO_V	0x0	<p>iaig:</p> <p>IOTLB Actual Invalidation Granularity</p> <p>Hardware reports the granularity at which an invalidation request was proceed through the AIG field at the time of reporting invalidation completion (by clearing the Intel VT field). The following are the encoding for the 2-bit IAIG field.</p> <p>00: Reserved. This indicates hardware detected an incorrect invalidation request and ignored the request. Examples of incorrect invalidation requests include detecting an unsupported address mask value in Invalidate Address register for page-selective invalidation requests or an unsupported/undefined encoding in IIRG.</p> <p>01: Global Invalidation performed. The processor sets this in response to a global IOTLB invalidation request.</p> <p>10: Domain-selective invalidation performed using the domain-id that was specified by software in the DID field. The processor sets this in response to a domain selective IOTLB invalidation request.</p> <p>11: CPU sets this in response to a page selective invalidation request.</p>
49:49	RW	0x0	<p>dr:</p> <p>CPU uses this to drain or not drain reads on an invalidation request.</p>
48:48	RW	0x0	<p>dw:</p> <p>CPU uses this to drain or not drain reads on an invalidation request.</p>
47:32	RW	0x0	<p>did:</p> <p>Domain to be invalidated and is programmed by software for both page and domain selective invalidation requests. CPU ignores the bits 47:40 since it supports only an 8 bit Domain ID.</p>

8.7.31 vid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x0		Function: 1	
Bit	Attr	Default	Description
15:0	RO	0x8086	<p>vendor_identification_number:</p> <p>The value is assigned by PCI-SIG to Intel.</p>

8.7.32 did

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2		Function: 1	
Bit	Attr	Default	Description
15:0	RO	0xe29	<p>device_identification_number:</p> <p>Device ID values vary from function to function. Bits 15:8 are equal to 0x0E .</p>



8.7.33 pcicmd

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x4		Function: 1	
Bit	Attr	Default	Description
10:10	RW	0x0	intx_interrupt_disable: 1

8.7.34 pcists

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x6		Function: 1	
Bit	Attr	Default	Description
4:4	RO	0x1	capl: 1
3:3	RO_V	0x1	intxstat: 1

8.7.35 rid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x8		Function: 1	
Bit	Attr	Default	Description
7:0	RO_V	0x0	revision_id: Reflects the Uncore Revision ID after reset. Reflects the Compatibility Revision ID after BIOS writes 0x69 to any RID register in any Intel® Xeon® Processor E5 v2 product family function. Implementation Note: Read and write requests from the host to any RID register in any Intel® Xeon® Processor E5 v2 product family function are re-directed to the IIO cluster. Accesses to the CCR field are also redirected due to DWORD alignment. It is possible that JTAG accesses are direct, so will not always be redirected.



8.7.36 ccr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x9		Function: 1	
Bit	Attr	Default	Description
23:16	RO	0x8	base_class: Generic Device
15:8	RO	0x80	sub_class: Generic Device
7:0	RO	0x0	interface: 1

8.7.37 clsr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xc		Function: 1	
Bit	Attr	Default	Description
7:0	RW	0x0	cacheline_size: This register is set as RW for compatibility reasons only. Cacheline size is always 64B.

8.7.38 plat

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xd		Function: 1	
Bit	Attr	Default	Description
7:0	RO	0x0	primary_latency_timer: Not applicable to PCI Express. Hardwired to 00h.

8.7.39 hdr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xe		Function: 1	
Bit	Attr	Default	Description
7:7	RO	0x0	multi_function_device: This bit defaults to 1b since all these devices are multi-function



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xe		Function: 1	
Bit	Attr	Default	Description
6:0	RO	0x0	configuration_layout: This field identifies the format of the configuration header layout. It is Type 0 for all these devices. The default is 00h, indicating a 'endpoint device'.

8.7.40 bist

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xf		Function: 1	
Bit	Attr	Default	Description
7:0	RO	0x0	bist_tests: Not supported. Hardwired to 00h

8.7.41 svid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2c		Function: 1	
Bit	Attr	Default	Description
15:0	RW_O	0x0	subsystem_vendor_identification_number: The default value specifies Intel but can be set to any value once after reset.

8.7.42 sdid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2e		Function: 1	
Bit	Attr	Default	Description
15:0	RW_O	0x0	subsystem_device_identification_number: Assigned by the subsystem vendor to uniquely identify the subsystem



8.7.43 capptr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x34		Function: 1	
Bit	Attr	Default	Description
7:0	RO	0x40	capability_pointer: Points to the first capability structure for the device which is the PCIe capability.

8.7.44 intl

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x3c		Function: 1	
Bit	Attr	Default	Description
7:0	RO	0x0	interrupt_line: NA for these devices

8.7.45 intpin

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x3d		Function: 1	
Bit	Attr	Default	Description
7:0	RO	0x0	interrupt_pin: NA since these devices do not generate any interrupt on their own

8.7.46 mingnt

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x3e		Function: 1	
Bit	Attr	Default	Description
7:0	RO	0x0	mgv:

8.7.47 maxlat

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x3f		Function: 1	
Bit	Attr	Default	Description
7:0	RO	0x0	mlv:



8.7.48 pxpcap

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x40e		Function: 1	
Bit	Attr	Default	Description
29:25	RO	0x0	interrupt_message_number: NA for this device
24:24	RO	0x0	slot_implemented: NA for integrated endpoints
23:20	RO	0x9	device_port_type: Device type is Root Complex Integrated Endpoint
19:16	RO	0x1	capability_version: PCI Express Capability is Compliant with Version 1.0 of the PCI Express Spec. <i>Note:</i> This capability structure is not compliant with Versions beyond 1.0, since they require additional capability registers to be reserved. The only purpose for this capability structure is to make enhanced configuration space available. Minimizing the size of this structure is accomplished by reporting version 1.0 compliancy and reporting that this is an integrated root port device. As such, only three Dwords of configuration space are required for this structure.
15:8	RO	0x80	next_ptr: Pointer to the next capability. Set to 0 to indicate there are no more capability structures.
7:0	RO	0x10	capability_id: Provides the PCI Express capability ID assigned by PCI-SIG.



8.7.49 msicap

MSI Capability.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x80		Function: 1	
Bit	Attr	Default	Description
15:8	RO	0x0	next_ptr: Next pointer. 0: There are no other capability structures in the lower config space
7:0	RO	0x5	capability_id: 05 for MSI capability.

8.7.50 msictl

MSI Control.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x82		Function: 1	
Bit	Attr	Default	Description
15:9	RV	0x0	Reserved
8:8	RO	0x0	pvmc: Per Vector Masking Capable. This function does not support per vector masking.
7:7	RO	0x1	b64ac: 64 bit Address Capable. This function is 64 bit address capable.
6:4	RO	0x0	mme: Multiple Message Enable. This function only supports one vector.
3:1	RO	0x0	mmc: Multiple Message Capable. This function only requests one vector.
0:0	RW	0x0	msien: MSI Enable. Enables MSI's from this function if set. If cleared, then this function will generate legacy interrupts.

8.7.51 msiar

The MSI Address Register MSIAR contains the system specific address information to route MSI interrupts from the root ports and is broken into its constituent fields.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x84		Function: 1	
Bit	Attr	Default	Description
63:2	RW	0x0	msi_address: MSI Address. (DWORD aligned)
1:0	RV	0x0	Reserved



8.7.52 msidr

MSI Data.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x8c		Function: 1	
Bit	Attr	Default	Description
15:0	RW	0x0	msidr_data: Message Data.

8.7.53 memhpctrl

Memory Hot-Plug Control.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xa0		Function: 1	
Bit	Attr	Default	Description
31:1	RV	0x0	Reserved
0:0	RW	0x0	smien: SMI Enable. Enable SMI interrupt generation on any hotplug event (regardless of whether it is enabled in the MemHP capabilities).

8.7.54 xpprivc1

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xd0		Function: 1	
Bit	Attr	Default	Description
5:5	RWS	0x0	hpmsiclapsen: 1
4:4	RWS	0x1	hpmsirevalen:

8.7.55 memhpcap[0:3]

Channel X Memory Hot-Plug Capability (X = 0, 1, 2, 3)

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x100, 0x110, 0x120, 0x130		Function: 1	
Bit	Attr	Default	Description
31:20	RO	0x110 (memhpcap0) 0x120 (memhpcap1) 0x130 (memhpcap2) 0x0 (memhpcap3)	next_ptr: Next Pointer. This points to the next capability structure.
19:16	RO	0x1	capability_version:
15:0	RO	0xb	vendor_specific_capability:



8.7.56 memphdr[0:3]

Channel X Memory Hot-Plug Capability Header. (X = 0, 1, 2, 3)

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x104, 0x114, 0x124, x134		Function: 1	
Bit	Attr	Default	Description
31:20	RO	0x10	vendor_specific_length: There are 16 bytes in this capability structure.
19:16	RO	0x1	vendor_specific_revision_id: First revision of this capability structure.
15:0	RO	0x6	vendor_specific_id: Represents the Memory Hotplug Capability.

8.7.57 sltcap[0:3]

Channel X Slot Capability (X=0, 1, 2, 3)

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x108, 0x118, 0x128, 0x138		Function: 1	
Bit	Attr	Default	Description
31:19	RW_O	0x0	physical_slot_number: Indicates the associated memory channel number.
18:18	RO	0x0	command_complete_not_capable: If set, indicates that this structure is not capable of generating an interrupt on completion of the last command.
17:17	RW-O	0x0	electromechanical_interlock_present: This bit when set indicates that an Electromechanical Interlock is implemented on the chassis for this slot and that lock is controlled by bit 11 in Slot Control register. This field is initialized by BIOS based on the system architecture. BIOS note: this capability is not set if the Electromechanical Interlock control is connected to main slot power control. This is expected to be used only for hot-pluggable slots.
16:7	RV	0x0	Reserved
6:6	RW_O	0x0	hot_plug_capable: This field defines hot-plug support capabilities for the Memory Channel 0: indicates that this slot is not capable of supporting Hot-plug operations. 1: indicates that this slot is capable of supporting Hot-plug operations This bit is programmed by BIOS based on the system design. This bit must be programmed by BIOS to be consistent with the VPP enable bit for the port.
5:5	RO	0x0	hot_plug_surprise: This field indicates that a device in this slot may be removed from the system without prior notification. This field is initialized by BIOS. 0: indicates that hot-plug surprise is not supported 1: indicates that hot-plug surprise is supported This bit is not set because there are no known usage models and no hardware mechanism for detecting a surprise hotplug event.




Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x108, 0x118, 0x128, 0x138		Function: 1	
Bit	Attr	Default	Description
4:4	RW_O	0x0	power_indicator_present: This bit indicates that a Power Indicator is implemented for this slot and is electrically controlled by the chassis. 0: indicates that a Power Indicator that is electrically controlled by the chassis is not present 1: indicates that Power Indicator that is electrically controlled by the chassis is present BIOS programs this field.
3:3	RW_O	0x0	attention_indicator_present: This bit indicates that an Attention Indicator is implemented for this slot and is electrically controlled by the chassis 0: indicates that an Attention Indicator that is electrically controlled by the chassis is not present 1: indicates that an Attention Indicator that is electrically controlled by the chassis is present BIOS programs this field.
2:2	RW_O	0x0	mrl_sensor_present: This bit indicates that an MRL Sensor is implemented on the chassis for this slot. 0: indicates that an MRL Sensor is not present 1: indicates that an MRL Sensor is present BIOS programs this field.
1:1	RW_O	0x0	power_controller_present: This bit indicates that a software controllable power controller is implemented on the chassis for this slot. 0: indicates that a software controllable power controller is not present 1: indicates that a software controllable power controller is present BIOS programs this field.
0:0	RW_O	0x0	attention_button_present: This bit indicates that the Attention Button event signal is routed (from slot or on-board in the chassis) to the IIO's hotplug controller. 0: indicates that an Attention Button signal is routed to IIO 1: indicates that an Attention Button is not routed to IIO BIOS programs this field.

8.7.58 sltcon[0:3]

Channel X Slot Control (X=0, 1, 2, 3)

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x10c, 0x11c, 0x12c, 0x13c		Function: 1	
Bit	Attr	Default	Description
15:12	RV	0x0	Reserved
11:11	RWS	0x0	electromechanical_interlock_control: When software writes a 1 to this bit, IIO pulses the EMIL pin. Write of 0 has no effect. This bit always returns a 0 when read. If electromechanical lock is not implemented, then either a write of 1 or 0 to this register has no effect.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x10c, 0x11c, 0x12c, 0x13c		Function: 1	
Bit	Attr	Default	Description
10:10	RWS	0x1	<p>power_controller_control:</p> <p>If a power controller is implemented, when writes to this field will set the power state of the slot as indicated by this bit. Reads of this field must reflect the value from the latest write, even if the corresponding hot-plug command is not executed yet at the VPP, unless software issues a write without waiting for the previous command to complete in which case the read value is undefined.</p> <p>0: Power On 1: Power Off</p>
9:8	RW	0x3	<p>power_indicator_control:</p> <p>If a Power Indicator is implemented, writes to this field will set the Power Indicator to the written state. Reads of this field must reflect the value from the latest write, even if the corresponding hot-plug command is not executed yet at the VPP, unless software issues a write without waiting for the previous command to complete in which case the read value is undefined.</p> <p>00: Reserved 01: On 10: Blink (IIO drives 1 Hz square wave for Chassis mounted LEDs) 11: Off</p>
7:6	RW	0x3	<p>attention_indicator_control:</p> <p>If an Attention Indicator is implemented, writes to this field will set the Attention Indicator to the written state. Reads of this field reflect the value from the latest write, even if the corresponding hot-plug command is not executed yet at the VPP, unless software issues a write without waiting for the previous command to complete in which case the read value is undefined.</p> <p>00: Reserved 01: On 10: Blink (IIO drives 1 Hz square wave) 11: Off</p>
5:5	RW	0x0	<p>hot_plug_interrupt_enable:</p> <p>When set to 1b, this bit enables generation of Hot-Plug interrupt, MSI or INTx interrupt depending on the setting of the MSI enable bit in 'MSI Control Register (MSICTRL)' on enabled Hot-Plug events.</p> <p>0: Disables interrupt generation on Hot-plug events 1: Enables interrupt generation on Hot-plug events</p>
4:4	RW	0x0	<p>command_completed_interrupt_enable:</p> <p>This field enables software notification (Interrupt - MSI/INTx) when a command is completed by the Hot-plug controller connected to the PCI Express port</p> <p>0: Disables hot-plug interrupts on a command completion by a hot-plug Controller 1: Enables hot-plug interrupts on a command completion by a hot-plug Controller</p>
3:3	RW	0x0	<p>presence_detect_changed_enable:</p> <p>This bit enables the generation of hot-plug interrupts or wake messages via a presence detect changed event.</p> <p>0: Disables generation of hot-plug interrupts when a presence detect changed event happens. 1: Enables generation of hot-plug interrupts when a presence detect changed event happens.</p>
2:2	RW	0x0	<p>mrl_sensor_changed_enable:</p> <p>This bit enables the generation of hot-plug interrupts or wake messages via a MRL Sensor changed event.</p> <p>0: Disables generation of hot-plug interrupts when an MRL Sensor changed event happens. 1: Enables generation of hot-plug interrupts when an MRL Sensor changed event happens.</p>



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x10c, 0x11c, 0x12c, 0x13c		Function: 1	
Bit	Attr	Default	Description
1:1	RW	0x0	power_fault_detected_enable: This bit enables the generation of hot-plug interrupts or wake messages via a power fault event. 0: Disables generation of hot-plug interrupts when a power fault event happens. 1: Enables generation of hot-plug interrupts when a power fault event happens.
0:0	RW	0x0	attention_button_pressed_enable: This bit enables the generation of hot-plug interrupts or wake messages via an attention button pressed event. 0: Disables generation of hot-plug interrupts when the attention button is pressed. 1: Enables generation of hot-plug interrupts when the attention button is pressed.

8.7.59 sltsts[0:3]

Channel X Slot Status. (X=0, 1, 2, 3)

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x10e, 0x11e, 0x12e, 0x13e		Function: 1	
Bit	Attr	Default	Description
15:8	RV	0x0	Reserved
7:7	RO	0x0	electromechanical_latch_status: When read this register returns the current state of the Electromechanical Interlock (the EMILS pin) which has the defined encodings as: 0: Electromechanical Interlock Disengaged 1: Electromechanical Interlock Engaged
6:6	RO	0x0	presence_detect_state: When read, this register returns the current state of the Present Detect pin. 0: Module slot empty 1: Module Present in slot (powered or unpowered)
5:5	RO	0x0	mrI_sensor_state: This bit reports the status of an MRL sensor if it is implemented. 0: MRL Closed 1: MRL Open
4:4	RW1C	0x0	command_completed: This bit is set by IIO when the hot-plug command has completed and the hot-plug controller is ready to accept a subsequent command. It is subsequently cleared by software after the field has been read and processed. This bit provides no guarantee that the action corresponding to the command is complete. Any write to SLTCON (regardless of the port is capable or enabled for hot-plug) is considered a 'hot-plug' command. If the port is not hot-plug capable or hot-plug enabled, then the hot-plug command does not trigger any action on the VPP port but the command is still completed via this bit.
3:3	RW1C	0x0	presence_detect_changed: This bit is set by IIO when the value reported in bit 6 is changes. It is subsequently cleared by software after the field has been read and processed.
2:2	RW1C	0x0	mrI_sensor_changed: This bit is set if the value reported in bit 5 changes. It is subsequently cleared by software after the field has been read and processed.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x10e, 0x11e, 0x12e, 0x13e		Function: 1	
Bit	Attr	Default	Description
1:1	RW1C	0x0	power_fault_detected: This bit is set by IIO when a power fault event is detected by the power controller (which is reported via the VPP bit stream). It is subsequently cleared by software after the field has been read and processed.
0:0	RW1C	0x0	attention_button_pressed: This bit is set by IIO when the attention button is pressed. It is subsequently cleared by software after the field has been read and processed.

8.8 Device 5 Function 2

Global System Control and Error Registers.

Register Name	Offset	Size
vid	0x0	16
did	0x2	16
pcicmd	0x4	16
pcists	0x6	16
rid	0x8	8
ccr	0x9	24
clsr	0xc	8
hdr	0xe	8
svid	0x2c	16
sdid	0x2e	16
capptr	0x34	8
intl	0x3c	8
intpin	0x3d	8
pxpcapid	0x40	8
pxpnxtptr	0x41	8
pxpcap	0x42	16
csr_sat_mask_set	0x46	16
cgctrl3	0x48	32
cgctrl6	0x4c	32
cgctrl7	0x50	32
cgsts	0x54	32
cgstagger	0x58	8
cgctrl5	0x59	8
cgctrl4_0	0x5a	16
cgctrl4_1	0x5c	16
irpperrsv	0x80	64
ioerrsv	0x8c	32
mierrsv	0x90	32
pcierrsv	0x94	32



Register Name	Offset	Size
sysmap	0x9c	32
viral	0xa0	32
errpinctl	0xa4	32
errpinsts	0xa8	32
errpindat	0xac	32
vppctl	0xb0	64
vppsts	0xb8	32
vppfreq	0xbc	32
vppmem	0xc0	64
vpp_inverts	0xc8	32
miscprivc	0x16c	32
gcerrst	0x1a8	32
gcferrst	0x1ac	32
gcnerrst	0x1b8	32
gnerrst	0x1c0	32
gferrst	0x1c4	32
gerrctl	0x1c8	32
gsysst	0x1cc	32
gsysctl	0x1d0	32
gfferrst	0x1dc	32
gfnerrst	0x1e8	32
gnferrst	0x1ec	32
gnnerrst	0x1f8	32
irpp0errst	0x230	32
irpp0errctl	0x234	32
irpp0fferrst	0x238	32
irpp0fnerrst	0x23c	32
irpp0fferrhd0	0x240	32
irpp0fferrhd1	0x244	32
irpp0fferrhd2	0x248	32
irpp0fferrhd3	0x24c	32
irpp0nferrst	0x250	32
irpp0nnerrst	0x254	32
irpp0nferrhd0	0x258	32
irpp0nferrhd1	0x25c	32
irpp0nferrhd2	0x260	32
irpp0nferrhd3	0x264	32
irpp0errcntsel	0x268	32
irpp0errcnt	0x26c	32
irpp1errst	0x2b0	32
irpp1errctl	0x2b4	32
irpp1fferrst	0x2b8	32
irpp1fnerrst	0x2bc	32



Register Name	Offset	Size
irpp1fferrhd0	0x2c0	32
irpp1fferrhd1	0x2c4	32
irpp1fferrhd2	0x2c8	32
irpp1fferrhd3	0x2cc	32
irpp1nferrst	0x2d0	32
irpp1nnerrst	0x2d4	32
irpp1nferrhd0	0x2d8	32
irpp1nferrhd1	0x2dc	32
irpp1nferrhd2	0x2e0	32
irpp1nferrhd3	0x2e4	32
irpp1errcntsel	0x2e8	32
irpp1errcnt	0x2ec	32
iioerrst	0x300	32
iioerrctl	0x304	32
iiofferrst	0x308	32
iiofferrhd_0	0x30c	32
iiofferrhd_1	0x310	32
iiofferrhd_2	0x314	32
iiofferrhd_3	0x318	32
iiofnerrst	0x31c	32
ionferrst	0x320	32
ionferrhd_0	0x324	32
ionferrhd_1	0x328	32
ionferrhd_2	0x32c	32
ionferrhd_3	0x330	32
ionnerrst	0x334	32
iioerrcntsel	0x33c	32
iioerrcnt	0x340	32
mierrst	0x380	32
mierrctl	0x384	32
mifferrst	0x388	32
mifferrhdr_0	0x38c	32
mifferrhdr_1	0x390	32
mifferrhdr_2	0x394	32
mifferrhdr_3	0x398	32
mifnerrst	0x39c	32
minferrst	0x3a0	32
minferrhdr_0	0x3a4	32
minferrhdr_1	0x3a8	32
minferrhdr_2	0x3ac	32
minferrhdr_3	0x3b0	32
minnerrst	0x3b4	32
mierrcntsel	0x3bc	32



Register Name	Offset	Size
mierrcnt	0x3c0	8

8.8.1 vid

Type:	CFG	PortID:	N/A	Function:	2
Bus:	0	Device:	5		
Offset:	0x0				
Bit	Attr	Default	Description		
15:0	RO	0x8086	vendor_identification_number: The value is assigned by PCI-SIG to Intel.		

8.8.2 did

Type:	CFG	PortID:	N/A	Function:	2
Bus:	0	Device:	5		
Offset:	0x2				
Bit	Attr	Default	Description		
15:0	RO	0xe2a	device_identification_number: Device ID values vary from function to function. Bits 15:8 are equal to 0x0E.		

8.8.3 pcicmd

Type:	CFG	PortID:	N/A	Function:	2
Bus:	0	Device:	5		
Offset:	0x4				
Bit	Attr	Default	Description		
10:10	RO	0x0	intx_disable: NA for these devices		
9:9	RO	0x0	fast_back_to_back_enable: Not applicable to PCI Express and is hardwired to 0		
8:8	RO	0x0	serr_enable: This bit has no impact on error reporting from these devices		
7:7	RO	0x0	idsel_stepping_wait_cycle_control: Not applicable to internal devices. Hardwired to 0.		
6:6	RO	0x0	parity_error_response: This bit has no impact on error reporting from these devices		
5:5	RO	0x0	vga_palette_snoop_enable: Not applicable to internal devices. Hardwired to 0.		



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x4		Function: 2	
Bit	Attr	Default	Description
4:4	RO	0x0	memory_write_and_invalidate_enable: Not applicable to internal devices. Hardwired to 0.
3:3	RO	0x0	special_cycle_enable: Not applicable. Hardwired to 0.
2:2	RO	0x0	bus_master_enable: Hardwired to 0 since these devices don't generate any transactions
1:1	RO	0x0	memory_space_enable: Hardwired to 0 since these devices don't decode any memory BARs
0:0	RO	0x0	io_space_enable: Hardwired to 0 since these devices don't decode any IO BARs

8.8.4 pcists

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x6		Function: 2	
Bit	Attr	Default	Description
15:15	RO	0x0	detected_parity_error: This bit is set when the device receives a packet on the primary side with an uncorrectable data error including a packet with poison bit set or an uncorrectable addresscontrol parity error. The setting of this bit is regardless of the Parity Error Response bit PERRE in the PCICMD register. R2PCIe will never set this bit.
14:14	RO	0x0	signaled_system_error: Hardwired to 0
13:13	RO	0x0	received_master_abort: Hardwired to 0
12:12	RO	0x0	received_target_abort: Hardwired to 0
11:11	RO	0x0	signaled_target_abort: Hardwired to 0
10:9	RO	0x0	devsel_timing: Not applicable to PCI Express. Hardwired to 0.
8:8	RO	0x0	master_data_parity_error: Hardwired to 0



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x6		Function: 2	
Bit	Attr	Default	Description
7:7	RO	0x0	fast_back_to_back: Not applicable to PCI Express. Hardwired to 0.
5:5	RO	0x0	pci66mhz_capable: Not applicable to PCI Express. Hardwired to 0.
4:4	RO	0x1	capabilities_list: This bit indicates the presence of a capabilities list structure
3:3	RO	0x0	intx_status: Hardwired to 0

8.8.5 rid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x8		Function: 2	
Bit	Attr	Default	Description
7:0	RO_V	0x0	revision_id: Reflects the Uncore Revision ID after reset. Reflects the Compatibility Revision ID after BIOS writes 0x69 to any RID register in any Intel® Xeon® Processor E5 v2 product family function. Implementation Note: Read and write requests from the host to any RID register in any Intel® Xeon® Processor E5 v2 product family function are re-directed to the IIO cluster. Accesses to the CCR field are also redirected due to DWORD alignment. It is possible that JTAG accesses are direct, so will not always be redirected.

8.8.6 ccr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x9		Function: 2	
Bit	Attr	Default	Description
23:16	RO_V	0x8	base_class: Generic Device
15:8	RO_V	0x80	sub_class: Generic Device
7:0	RO_V	0x0	register_level_programming_interface: Set to 00h for all non-APIC devices.



8.8.7 clsr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xc		Function: 2	
Bit	Attr	Default	Description
7:0	RW	0x0	cacheline_size: This register is set as RW for compatibility reasons only. Cacheline size is always 64B.

8.8.8 hdr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xe		Function: 2	
Bit	Attr	Default	Description
7:7	RO	0x1	multi_function_device: This bit defaults to 1b since all these devices are multi-function
6:0	RO	0x0	configuration_layout: This field identifies the format of the configuration header layout. It is Type 0 for all these devices. The default is 00h, indicating a 'endpoint device'.

8.8.9 svid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2c		Function: 2	
Bit	Attr	Default	Description
15:0	RW_O	0x0	subsystem_vendor_identification_number: The default value specifies Intel but can be set to any value once after reset.

8.8.10 sdid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2e		Function: 2	
Bit	Attr	Default	Description
15:0	RW_O	0x0	subsystem_device_identification_number: Assigned by the subsystem vendor to uniquely identify the subsystem



8.8.11 capptr

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x34	Function:	2
Bit	Attr	Default	Description
7:0	RO	0x40	capability_pointer: Points to the first capability structure for the device which is the PCIe capability.

8.8.12 intl

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x3c	Function:	2
Bit	Attr	Default	Description
7:0	RO	0x0	interrupt_line: NA for these devices

8.8.13 intpin

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x3d	Function:	2
Bit	Attr	Default	Description
7:0	RO	0x0	interrupt_pin: NA since these devices do not generate any interrupt on their own

8.8.14 pxpcapid

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x40	Function:	2
Bit	Attr	Default	Description
7:0	RO	0x10	capability_id: Provides the PCI Express capability ID assigned by PCI-SIG.

8.8.15 pxpnxtptr

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x41	Function:	2
Bit	Attr	Default	Description
7:0	RO	0x0	next_ptr: This field is set to the PCI PM capability.



8.8.16 pxpcap

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x42		Function: 2	
Bit	Attr	Default	Description
13:9	RO	0x0	interrupt_message_number_n_a:
8:8	RO	0x0	slot_implemented_n_a:
7:4	RO	0x9	device_port_type: This field identifies the type of device. It is set to for the DMA to indicate root complex integrated endpoint device.
3:0	RO	0x2	capability_version: This field identifies the version of the PCI Express capability structure. Set to 2h for PCI Express and DMA devices for compliance with the extended base registers.

8.8.17 csr_sat_mask_set

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x46		Function: 2	
Bit	Attr	Default	Description
15:0	RW	0x0	csr_sat_mask_set:

8.8.18 cgctrl3

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x48		Function: 2	
Bit	Attr	Default	Description
31:0	RW	0x0	alarm:

8.8.19 cgctrl6

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x4c		Function: 2	
Bit	Attr	Default	Description
31:28	RW	0x0	progseq07:
27:24	RW	0x0	progseq06:
23:20	RW	0x0	progseq05:
19:16	RW	0x0	progseq04:
15:12	RW	0x0	progseq03:
11:8	RW	0x0	progseq02:
7:4	RW	0x0	progseq01:
3:0	RW	0x0	progseq00:



8.8.20 cgctrl7

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x50	Function:	2
Bit	Attr	Default	Description
31:28	RW	0x0	progseq15:
27:24	RW	0x0	progseq14:
23:20	RW	0x0	progseq13:
19:16	RW	0x0	progseq12:
15:12	RW	0x0	progseq11:
11:8	RW	0x0	progseq10:
7:4	RW	0x0	progseq09:
3:0	RW	0x0	progseq08:

8.8.21 cgsts

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x54	Function:	2
Bit	Attr	Default	Description
31:0	RW_V	0x0	gated_duration:

8.8.22 cgstagger

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x58	Function:	2
Bit	Attr	Default	Description
7:0	RW	0x0	stagger:

8.8.23 cgctrl5

Type:	CFG	PortID:	N/A
Bus:	0	Device:	5
Offset:	0x59	Function:	2
Bit	Attr	Default	Description
3:0	RW	0x0	numsattelites:



8.8.24 cgctrl4_0

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x5a		Function: 2	
Bit	Attr	Default	Description
15:0	RW	0x0	pstatedelay1:

8.8.25 cgctrl4_1

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x5c		Function: 2	
Bit	Attr	Default	Description
2:0	RW	0x0	pstatedelay2:

8.8.26 irpperrsv

IRP Protocol Error Severity.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x80		Function: 2	
Bit	Attr	Default	Description
29:28	RWS	0x2	protocol_parity_error: (DB) 00: Error Severity Level 0 (Correctable) 01: Error Severity Level 1 (Recoverable) 10: Error Severity Level 2 (Fatal) 11: Reserved
27:26	RWS	0x2	protocol_qt_overflow_underflow: (DA) 00: Error Severity Level 0 (Correctable) 01: Error Severity Level 1 (Recoverable) 10: Error Severity Level 2 (Fatal) 11: Reserved
21:20	RWS	0x2	protocol_rcvd_unexprsp: (D7) 00: Error Severity Level 0 (Correctable) 01: Error Severity Level 1 (Recoverable) 10: Error Severity Level 2 (Fatal) 11: Reserved
9:8	RWS	0x1	csr_acc_32b_unaligned: (C3) 00: Error Severity Level 0 (Correctable) 01: Error Severity Level 1 (Recoverable) 10: Error Severity Level 2 (Fatal) 11: Reserved
7:6	RWS	0x1	wrcache_unecc_error: (C2) 00: Error Severity Level 0 (Correctable) 01: Error Severity Level 1 (Recoverable) 10: Error Severity Level 2 (Fatal) 11: Reserved



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x80		Function: 2	
Bit	Attr	Default	Description
5:4	RWS	0x1	protocol_rcvd_poison: (C1) 00: Error Severity Level 0 (Correctable) 01: Error Severity Level 1 (Recoverable) 10: Error Severity Level 2 (Fatal) 11: Reserved
3:2	RWS	0x0	wrcache_correcc_error: (B4) 00: Error Severity Level 0 (Correctable) 01: Error Severity Level 1 (Recoverable) 10: Error Severity Level 2 (Fatal) 11: Reserved

8.8.27 iioerrsv

IIO Core Error Severity.

This register associates the detected IIO internal core errors to an error severity level. An individual error is reported with the corresponding severity in this register. Software can program the error severity to one of the three severities supported by IIO. This register is sticky and can only be reset by PWRGOOD.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x8c		Function: 2	
Bit	Attr	Default	Description
13:12	RWS_L	0x1	c6_overflow_underflow_error: 00: Error Severity Level 0 (Correctable) 01: Error Severity Level 1 (Recoverable) 10: Error Severity Level 2 (Fatal) 11: Reserved Note: Locked by RSPLCK
11:10	RWS_L	0x1	RSVD
9:8	RWS_L	0x1	c4_master_abort_address_error: 00: Error Severity Level 0 (Correctable) 01: Error Severity Level 1 (Recoverable) 10: Error Severity Level 2 (Fatal) 11: Reserved Note: Locked by RSPLCK
7:0	RWS_L	0x0	Reserved



8.8.28 mierrsv

Miscellaneous Error Severity.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x90		Function: 2	
Bit	Attr	Default	Description
9:8	RWS	0x0	RSVD
7:6	RWS	0x0	vpp_err_sts: This bit should be programmed to 1.
5:4	RWS	0x0	RSVD
3:2	RWS	0x0	RSVD
1:0	RWS	0x0	RSVD

8.8.29 pcierrsv

PCIe Error Severity Map.

This register allows remapping of the PCIe errors to the IIO error severity.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x94		Function: 2	
Bit	Attr	Default	Description
5:4	RWS	0x2	pciefaterr_map: 10: Map this PCIe error type to Error Severity 2 01: Map this PCIe error type to Error Severity 1 00: Map this PCIe error type to Error Severity 0
3:2	RWS	0x1	pcienonfaterr_map: 10: Map this PCIe error type to Error Severity 2 01: Map this PCIe error type to Error Severity 1 00: Map this PCIe error type to Error Severity 0
1:0	RWS	0x0	pciecorerr_map: 10: Map this PCIe error type to Error Severity 2 01: Map this PCIe error type to Error Severity 1 00: Map this PCIe error type to Error Severity 0

8.8.30 sysmap

System Error Event map.

This register maps the error severity detected by the IIO to one of the system events. When an error is detected by the IIO, its corresponding error severity determines which system event to generate according to this register.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x9c		Function: 2	
Bit	Attr	Default	Description
10:8	RWS	0x1	sev2_map: 010: Generate NMI 001: Generate SMIPMI 000: No inband message Others: Reserved
6:4	RWS	0x2	sev1_map: 010: Generate NMI 001: Generate SMIPMI 000: No inband message Others: Reserved
2:0	RWS	0x0	sev0_map: 010: Generate NMI 001: Generate SMIPMI 000: No inband message Others: Reserved

8.8.31 viral

This register provides the option to generate viral alert upon the detection of fatal error.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xa0		Function: 2	
Bit	Attr	Default	Description
31:31	RW1C	0x0	iio_viral_state: Indicates the IIO cluster is in a viral state. When set, all outbound requests are master aborted, all inbound requests are master aborted. This includes traffic to and from the DMI port, except the Reset_Warn message, which will be auto-completed by the DMI port. This state bit is cleared by warm reset.
30:30	RW1CS	0x0	iio_viral_status: Indicates the IIO cluster had gone to viral. This bit has no effect on hardware and does not indicate the IIO is currently in the viral state. This bit is persistent through warm reset (sticky), even though the viral state is not.
2:2	RW	0x0	iio_global_viral_mask: 0: IIO Viral State assertion will cause IIO hardware packet blocking. 1: IIO Viral State assertion will not cause IIO hardware packet blocking.
1:1	RW	0x0	Reserved (Rsvd): Reserved
0:0	RW	0x0	iio_fatal_viral_alert_enable: Enables IIO viral alert.



8.8.32 errpinctl

This register provides the option to configure an error pin to either as a special purpose error pin which is asserted based on the detected error severity, or as a general purpose output which is asserted based on the value in the ERRPINDAT. The assertion of the error pins can also be completely disabled by this register.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xa4		Function: 2	
Bit	Attr	Default	Description
5:4	RW	0x0	pin2: 11: Reserved. 10: Assert Error Pin when error severity 2 is set in the system event status reg. 01: Assert and Deassert Error pin according to error pin data register. 00: Disable Error pin assertion
3:2	RW	0x0	pin1: 11: Reserved. 10: Assert Error Pin when error severity 1 is set in the system event status reg. 01: Assert and Deassert Error pin according to error pin data register. 00: Disable Error pin assertion
1:0	RW	0x0	pin0: 11: Reserved. 10: Assert Error Pin when error severity 0 is set in the system event status reg. 01: Assert and Deassert Error pin according to error pin data register. 00: Disable Error pin assertion

8.8.33 errpinsts

This register reflects the state of the error pin assertion. The status bit of the corresponding error pin is set upon the deassertion to assertion transition of the error pin. This bit is cleared by the software with writing 1 to the corresponding bit.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xa8		Function: 2	
Bit	Attr	Default	Description
2:2	RW1CS	0x0	pin2: This bit is set upon the transition of deassertion to assertion of the Error pin. Software write 1 to clear the status.
1:1	RW1CS	0x0	pin1: This bit is set upon the transition of deassertion to assertion of the Error pin. Software write 1 to clear the status.
0:0	RW1CS	0x0	pin0: This bit is set upon the transition of deassertion to assertion of the Error pin. Software write 1 to clear the status.

8.8.34 errpindat

This register provides the data value when the error pin is configured as a general purpose output.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xac		Function: 2	
Bit	Attr	Default	Description
2:2	RW_LB	0x0	pin2: This bit acts as the general purpose output for the Error[2] pin. Software setsclears this bit to assertdeassert Error[2] pin. This bit applies only when ERRPINCTL[5:4] = 01; otherwise it is reserved. 0: Assert ERR#2 pin drive low 1: Deassert ERR#2 pin float high Notes: This pin is open drain and must be pulled high by external resistor when deasserted. BIOS needs to write 1 to this bit for security reasons if this register is not used.
1:1	RW_LB	0x0	pin1: This bit acts as the general purpose output for the Error[1] pin. Software setsclears this bit to assertdeassert Error[1] pin. This bit applies only when ERRPINCTL[3:2] = 01; otherwise it is reserved. 0: Assert ERR#1 pin drive low 1: Deassert ERR#1 pin float high This pin is open drain and must be pulled high by external resistor when deasserted. BIOS needs to write 1 to this bit for security reasons if this register is not used.
0:0	RW_LB	0x0	pin0: This bit acts as the general purpose output for the Error[0] pin. Software setsclears this bit to assertdeassert Error[0] pin. This bit applies only when ERRPINCTL[1:0] = 01; otherwise it is reserved. 0: Assert ERR#0 pin drive low 1: Deassert ERR#0 pin float high Notes: This pin is open drain and must be pulled high by external resistor when deasserted. BIOS needs to write 1 to this bit for security reasons if this register is not used.

8.8.35 vppctl

This register defines the control/command for PCA9555.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xb0		Function: 2	
Bit	Attr	Default	Description
63:60	RO	0x1	vpp_version: Specified the version of this structure for BIOS use. 0: VPPCTL with 11 PCIe ports. 1: VPPCTL with 11 PCIe prots + VPPMEM with 4 memory ports.
59:56	RV	0x0	Reserved
55:55	RWS	0x0	vpp_reset_mode: 0: Power good reset will reset the VPP state machines and hard reset will cause the VPP state machine to terminate at the next 'logical' VPP stream boundary and then reset the VPP state machines 1: Both power good and hard reset will reset the VPP state machines



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xb0		Function: 2	
Bit	Attr	Default	Description
54:44	RWS	0x0	<p>vpp_en:</p> <p>When set, the VPP function for the corresponding root port is enabled.</p> <p>Enable Root Port</p> <p>[54] Port 3d</p> <p>[53] Port 3c</p> <p>[52] Port 3b</p> <p>[51] Port 3a</p> <p>[50] Port 2d</p> <p>[49] Port 2c</p> <p>[48] Port 2b</p> <p>[47] Port 2a</p> <p>[46] Port 1b</p> <p>[45] Port 1a</p> <p>[44] Port 0 (PCIe mode only)</p>
43:0	RWS	0x0	<p>vpp_enaddr:</p> <p>Assigns the VPP address of the device on the VPP interface and assigns the port address for the ports within the VPP device. There are more address bits than root ports so assignment must be spread across VPP ports.</p> <p>Port Addr Root Port</p> <p>[40] [43:41] Port 3d</p> <p>[36] [39:37] Port 3c</p> <p>[32] [35:33] Port 3b</p> <p>[28] [31:29] Port 3a</p> <p>[24] [27:25] Port 2d</p> <p>[20] [23:21] Port 2c</p> <p>[16] [19:17] Port 2b</p> <p>[12] [15:13] Port 2a</p> <p>[8] [11:9] Port 1a</p> <p>[4] [7:5] Port 1a</p> <p>[0] [3:1] Port 0 (PCIe mode only)</p>

8.8.36 vppsts

This register defines the status from PCA9555

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xb8		Function: 2	
Bit	Attr	Default	Description
0:0	RW1CS	0x0	<p>vpp_error:</p> <p>VPP Port error happened i.e. an unexpected STOP of NACK was seen on the VPP port</p>



8.8.37 vppfreq

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xbc		Function: 2	
Bit	Attr	Default	Description
31:24	RWS	0x1e	vpp_tpf: Pulse Filter should be set to 60 nS. The value used is dependent on the internal clock frequency. In this case, internal clock frequency is 500 MHz, so the default value represents 60 nS at that rate.
23:16	RWS	0x96	vpp_thd_data: Hold time for Data is 300 nS. The default value is set to 300 nS when the internal clock rate is 500 MHz.
11:0	RWS	0x9c4	vpp_tsu_thd: Represents the high time and low time of the SCL pin. It should be set to 5 uS for a 100 kHz SCL clock 5 uS high time and 5 uS low time. The default value represents 5 uS with an internal clock of 500 MHz.

8.8.38 vppmem

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xc0		Function: 2	
Bit	Attr	Default	Description
63:40	RV	0x0	Reserved:
39:32	RWS	0x0	vpp_en: When set, the VPP function for the corresponding root port is enabled. Enable Root Port [39] reserved. [38] reserved. [37] reserved. [36] reserved. [35] Memory Channel x [34] Memory Channel x [33] Memory Channel x [32] Memory Channel x
31:0	RWS	0x0	vpp_enaddr: Assigns the VPP address of the device on the VPP interface and assigns the port address for the ports within the VPP device. There are for memory channel hotplug. Port Addr Root Port [31] [30:28] Reserved [27] [27:24] Reserved [23] [22:20] Reserved [19] [18:16] Reserved [15] [14:12] Memory Channel x [11] [10:8] Memory Channel x [7] [6:4] Memory Channel x [3] [2:0] Memory Channel x



8.8.39 vpp_inverts

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xc8		Function: 2	
Bit	Attr	Default	Description
2:2	RWS	0x0	dfr_inv_mrl: Inverts the MRL signal
1:1	RWS	0x0	dfr_inv_emil: Inverts the EMIL signal
0:0	RWS	0x0	dfr_inv_pwren: Inverts the PWREN signal

8.8.40 miscprivc

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x16c		Function: 2	
Bit	Attr	Default	Description
31:0	RWS	0x0	notused:

8.8.41 gcerrst

This register indicates the corrected error reported to the IIO global error logic. An individual error status bit that is set indicates that a particular local interface has detected an error.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1a8		Function: 2	
Bit	Attr	Default	Description
31:27	RV	0x0	RSVD
26:26	RV	0x0	iMC error Memory Controller Error Status. Note: This bit is only available for Intel® Xeon® Processor E5 v2 product family B0or later steppings. For A steppings, the bit is Reserved.mi:
25:25	RW	0b	Intel VT-d Error
24:24	RW	0b	Miscellaneous Error
23:23	RW	0b	IIO Core Error
22:22	RW	0b	Reserved
21:21	RW	0b	Reserved
20:20	RW	0b	DMI Error
19:16	RV	0x0	Reserved



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1a8		Function: 2	
Bit	Attr	Default	Description
15:5	RW	0x0	PCIe* Error Bit 5: Port 0 Bit 6: Port 1a Bit 7: Port 1b Bit 8: Port 2a Bit 9: Port 2b Bit 10: Port 2c Bit 11: Port 2d Bit 12: Port 3a Bit 13: Port 3b Bit 14: Port 3c Bit 15: Port 3d
4:2	RV	0x0	Reserved
1:1	RW	0x0	IRP1 Error Mask
0:0	RW	0b	IRP0 Error Mask; When set, disables logging of error

8.8.42 gcferrst

Type: CFG		PortID: N/A	
Bus: 5		Device: 5	
Offset: 0x1ac		Function: 2	
Bit	Attr	Default	Description
31:27	RV	0x0	RSVD
26:26	RV	0x0	iMC error Memory Controller Error Status. Note: This bit is only available for Intel® Xeon® Processor E5 v2 product family B0 or later steppings. For A steppings, the bit is Reserved.mi:
25:25	RW	0b	Intel VT-d Error
24:24	RW	0b	Miscellaneous Error
23:23	RW	0b	IIO Core Error
22:22	RW	0b	Reserved
21:21	RW	0b	Reserved
20:20	RW	0b	DMI Error
19:16	RV	0x0	Reserved
15:5	RW	0x0	PCIe* Error Bit 5: Port 0 Bit 6: Port 1a Bit 7: Port 1b Bit 8: Port 2a Bit 9: Port 2b Bit 10: Port 2c Bit 11: Port 2d Bit 12: Port 3a Bit 13: Port 3b Bit 14: Port 3c Bit 15: Port 3d
4:2	RV	0x0	Reserved
1:1	RW	0x0	IRP1 Error Mask
0:0	RW	0b	IRP0 Error Mask; When set, disables logging of error



8.8.43 gcnerrst

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1b8		Function: 2	
Bit	Attr	Default	Description
31:27	RV	0x0	RSVD
26:26	RV	0x0	iMC error Memory Controller Error Status. Note: This bit is only available for Intel® Xeon® Processor E5 v2 product family B0or later steppings. For A steppings, the bit is Reserved.mi:
25:25	RW	0b	Intel® VT-d Error
24:24	RW	0b	Miscellaneous Error
23:23	RW	0b	IIO Core Error
22:22	RW	0b	Reserved
21:21	RW	0b	Reserved
20:20	RW	0b	DMI Error
19:16	RV	0x0	Reserved
15:5	RW	0x0	PCIe* Error Bit 5: Port 0 Bit 6: Port 1a Bit 7: Port 1b Bit 8: Port 2a Bit 9: Port 2b Bit 10: Port 2c Bit 11: Port 2d Bit 12: Port 3a Bit 13: Port 3b Bit 14: Port 3c Bit 15: Port 3d
4:2	RV	0x0	Reserved
1:1	RW	0x0	IRP1 Error Mask
0:0	RW	0b	IRP0 Error Mask; When set, disables logging of error

8.8.44 gnerrst

Global Non-Fatal Error Status.

This register indicates the non-fatal error reported to the IIO global error logic. An individual error status bit that is set indicates that a particular local interface has detected an error.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1c0		Function: 2	
Bit	Attr	Default	Description
25:25	RW1CS	0x0	vtd:
24:24	RW1CS	0x0	mi:
23:23	RW1CS	0x0	iio: 1
22:22	RW1CS	0x0	dma: This bit indicates that IIO has detected an error in its DMA engine.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1c0		Function: 2	
Bit	Attr	Default	Description
21:21	RW1CS	0x0	thermal: 1
20:20	RW1CS	0x0	dmi: This bit indicates that IIO DMI port 0 has detected an error.
15:15	RW1CS	0x0	pcie10: 1
14:14	RW1CS	0x0	pcie9: 1
13:13	RW1CS	0x0	pcie8: 1
12:12	RW1CS	0x0	pcie7: 1
11:11	RW1CS	0x0	pcie6: 1
10:10	RW1CS	0x0	pcie5: 1
9:9	RW1CS	0x0	pcie4: 1
8:8	RW1CS	0x0	pcie3: 1
7:7	RW1CS	0x0	pcie2: 1
6:6	RW1CS	0x0	pcie1: 1
5:5	RW1CS	0x0	pcie0: 1
3:3	RW1CS	0x0	csipro1: 1
2:2	RW1CS	0x0	csipro0: 1
1:1	RW1CS	0x0	csi1_err: 1
0:0	RW1CS	0x0	csi0_err: 1

8.8.45 **gferrst**

Global Fatal Error Status.

This register indicates the fatal error reported to the IIO global error logic. An individual error status bit that is set indicates that a particular local interface has detected an error.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1c4		Function: 2	
Bit	Attr	Default	Description
25:25	RW1CS	0x0	vtd: This register indicates the fatal error reported to the Intel VT-d error logic. An individual error status bit that is set indicates that a particular local interface has detected an error.
24:24	RW1CS	0x0	mi: 1
23:23	RW1CS	0x0	iio: 1
22:22	RW1CS	0x0	dma: This bit indicates that IIO has detected an error in its DMA engine.
21:21	RW1CS	0x0	thermal: 1
20:20	RW1CS	0x0	dmi: This bit indicates that IIO DMI port 0 has detected an error.
15:15	RW1CS	0x0	pcie10: 1
14:14	RW1CS	0x0	pcie9: 1
13:13	RW1CS	0x0	pcie8: 1
12:12	RW1CS	0x0	pcie7: 1
11:11	RW1CS	0x0	pcie6: 1
10:10	RW1CS	0x0	pcie5: 1
9:9	RW1CS	0x0	pcie4: 1
8:8	RW1CS	0x0	pcie3: 1
7:7	RW1CS	0x0	pcie2: 1
6:6	RW1CS	0x0	pcie1: 1
5:5	RW1CS	0x0	pcie0: 1
3:3	RW1CS	0x0	csipro1: 1
2:2	RW1CS	0x0	csipro0: 1
1:1	RW1CS	0x0	tras_csi1: 1
0:0	RW1CS	0x0	tras_csi0: 1



8.8.46 gerrctl

Global Error Control.

This register controls/masks the reporting of errors detected by the IIO local interfaces. An individual error control bit that is set masks error reporting of the particular local interface; software may set or clear the control bit. This register is sticky and can only be reset by PWRGOOD. Note that bit fields in this register can become reserved depending on the port configuration. For example, if the PCIe port is configured as 2X8 ports, then only the corresponding PCI-EX8 bit fields are valid; other bits are unused and reserved. Global error control register masks errors reported from the local interface to the global register. If the an error reporting is disabled in this register, all errors from the corresponding local interface will not set any of the global error status bits.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1c8		Function: 2	
Bit	Attr	Default	Description
26:26	RV	0x0	IMC error Memory Controller Error Status. Note: This bit is only available for Intel® Xeon® Processor E5 v2 product family B0or later steppings. For A steppings, the bit is Reserved.
25:25	RW	0x0	vtd_err_msk:
24:24	RW	0x0	mi_err_msk:
23:23	RW	0x0	iio_err_msk: 1
22:22	RW	0x0	dma_err_msk: This bit enables/masks the error detected in the DMA (Crystal Beach).
21:21	RW	0x0	therm_err_msk: 1
20:20	RW	0x0	dmi_err_msk: This bit enables/masks the error detected in the DMI[0] Port.
15:15	RW	0x0	pcie_err_msk10: 1
14:14	RW	0x0	pcie_err_msk9: 1
13:13	RW	0x0	pcie_err_msk8: 1
12:12	RW	0x0	pcie_err_msk7: 1
11:11	RW	0x0	pcie_err_msk6: 1
10:10	RW	0x0	pcie_err_msk5: 1
9:9	RW	0x0	pcie_err_msk4: 1
8:8	RW	0x0	pcie_err_msk3: 1
7:7	RW	0x0	pcie_err_msk2: 1
6:6	RW	0x0	pcie_err_msk1: 1



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1c8		Function: 2	
Bit	Attr	Default	Description
5:5	RW	0x0	pcie_err_msk0: 1
3:3	RW	0x0	csip_err_msk1: 1
2:2	RW	0x0	csip_err_msk0: 1
1:1	RW	0x0	csi_err_msk1:
0:0	RW	0x0	csi_err_msk0: When set, disables logging of this error

8.8.47 gsysst

Global System Event Status.

This register indicates the error severity signaled by the IIO global error logic. Setting of an individual error status bit indicates that the corresponding error severity has been detected by the IIO.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1cc		Function: 2	
Bit	Attr	Default	Description
4:4	ROS_V	0x0	sev4: Thermal Trip Error
3:3	ROS_V	0x0	sev3: Thermal Alert Error
2:2	ROS_V	0x0	sev2: When set, IIO has detected an error of error severity 2
1:1	ROS_V	0x0	sev1: When set, IIO has detected an error of error severity 1
0:0	ROS_V	0x0	sev0: When set, IIO has detected an error of error severity 0

8.8.48 gsysctl

Global System Event Control.

The system event control register controls/masks the reporting the errors indicated by the system event status register. When cleared, the error severity does not cause the generation of the system event. When set, detection of the error severity generates system events according to system event map register (SYSMAP).



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1d0		Function: 2	
Bit	Attr	Default	Description
4:4	RW	0x0	sev4_en: Thermal Trip Enable
3:3	RW	0x0	sev3_en: Thermal Alert Enable
2:2	RW	0x0	sev2_en:
1:1	RW	0x0	sev1_en:
0:0	RW	0x0	sev0_en:

8.8.49 gtime_lsb

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1d4		Function: 2	
Bit	Attr	Default	Description
31:0	RWS_V	0x0	gtime_lsb:

8.8.50 gtime_msb

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1d8		Function: 2	
Bit	Attr	Default	Description
31:0	RWS_V	0x0	gtime_msb:

8.8.51 gfferrst, gfnerrst

Global Fatal FERR and NERR Status.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1dc, 0x1e8		Function: 2	
Bit	Attr	Default	Description
26:0	ROS_V	0x0	log: This field logs the global error status register content when the first fatal error is reported. This has the same format as the global fatal error status register (GFERRST).



8.8.52 gnferrst, gnnerrst

Global Non-Fatal FERR and NERR Status

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x1ec, 0x1f8		Function: 2	
Bit	Attr	Default	Description
26:0	ROS_V	0x0	log: This field logs the global error status register content when the first non-fatal error is reported. This has the same format as the global non-fatal error status register (GNERRST).

8.8.53 irpp[0:1]errst

IRP Protocol Error Status.

This register indicates the error detected by the Coherent Interface.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x230, 0x2b0		Function: 2	
Bit	Attr	Default	Description
14:14	RW1CS	0x0	protocol_parity_error: (DB) Originally used for detecting parity error on coherent interface, however, no parity checks exist. So this logs parity errors on data from the IIO switch on the inbound path.
13:13	RW1CS	0x0	protocol_qt_overflow_underflow: (DA)
10:10	RW1CS	0x0	protocol_rcvd_unexrsp: (D7) A completion has been received from the Coherent Interface that was unexpected.
4:4	RW1CS	0x0	csr_acc_32b_unaligned: (C3)
3:3	RW1CS	0x0	wrcache_uncecc_error: (C2) A double bit ECC error was detected within the Write Cache.
2:2	RW1CS	0x0	protocol_rcvd_poison: (C1) A poisoned packet has been received from the Coherent Interface.
1:1	RW1CS	0x0	wrcache_correcc_error: (B4) A single bit ECC error was detected and corrected within the Write Cache.

8.8.54 irpp[0:1]errctl

IRP Protocol Error Control.

This register enables the error status bit setting for a Coherent Interface detected error. Setting of the bit enables the setting of the corresponding error status bit in IRPPERRST register. If the bit is cleared, the corresponding error status will not be set.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x234, 0x2b4		Function: 2	
Bit	Attr	Default	Description
14:14	RWS	0x0	protocol_parity_error: (DB) 0: Disable error status logging for this error 1: Enable Error status logging for this error
13:13	RWS	0x0	protocol_qt_overflow_underflow: (DA) 0: Disable error status logging for this error 1: Enable Error status logging for this error
10:10	RWS	0x0	protocol_rcvd_unexprsp: (D7) 0: Disable error status logging for this error 1: Enable Error status logging for this error
4:4	RWS	0x0	csr_acc_32b_unaligned: (C3) 0: Disable error status logging for this error 1: Enable Error status logging for this error
3:3	RWS	0x0	wrcache_uncecc_error: (C2) 0: Disable error status logging for this error 1: Enable Error status logging for this error
2:2	RWS	0x0	protocol_rcvd_poison: (C1) 0: Disable error status logging for this error 1: Enable Error status logging for this error
1:1	RWS	0x0	wrcache_correcc_error: (B4) 0: Disable error status logging for this error 1: Enable Error status logging for this error

8.8.55 irpp[0:1]fferrst, irpp[0:1]fnerrst

IRP Protocol Fatal FERR and NERR Status.

The error status log indicates which error is causing the report of the first fatal error event.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: irp0: 0x238, 0x23c irp1: 0x2b8, 0x2bc		Function: 2	
Bit	Attr	Default	Description
14:14	ROS_V	0x0	protocol_parity_error: (DB) Originally used for detecting parity error on coherent interface, however, no parity checks exist. So this logs parity errors on data from the IIO switch on the inbound path.
13:13	ROS_V	0x0	protocol_qt_overflow_underflow: (DC)
10:10	ROS_V	0x0	protocol_rcvd_unexprsp: (D7) A completion has been received from the Coherent Interface that was unexpected.
4:4	ROS_V	0x0	csr_acc_32b_unaligned: (C3)
3:3	ROS_V	0x0	wrcache_uncecc_error: (C2) A double bit ECC error was detected within the Write Cache.
2:2	ROS_V	0x0	protocol_rcvd_poison: (C1) A poisoned packet has been received from the Coherent Interface.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x300		Function: 2	
Bit	Attr	Default	Description
31:7	RO	0x0	reserved: 1
6:6	RW1CS	0x0	c6:
5:5	RW1CS	0x0	RSVD
4:4	RW1CS	0x0	c4:
3:3	RW1CS	0x0	unused3:
2:2	RW1CS	0x0	unused2:
1:1	RW1CS	0x0	unused1:
0:0	RW1CS	0x0	unused0:

8.8.61 iioerrctl

IIO Core Error Control.

This register controls the reporting of IIO internal core errors detected by the IIO error logic. An individual error control bit that is cleared masks reporting of that a particular error; software may set or clear the respective bit. This register is sticky and can only be reset by PWRGOOD.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x304		Function: 2	
Bit	Attr	Default	Description
8:8	RWS_L	0x0	c4_inbound_ler_disable: Disable logging C4 error due to the PCIe being down due to being in LER mode. Note: Locked by RSPLCK
7:7	RWS_L	0x0	c4_outbound_ler_disable: Disable logging C4 error due to the PCIe being down due to being in LER mode. Note: Locked by RSPLCK
6:6	RWS_L	0x0	c6: Note: Locked by RSPLCK
5:5	RWS_L	0x0	RSVD
4:4	RWS_L	0x0	c4: Note: Locked by RSPLCK
3:3	RWS_L	0x0	unused3: Note: Locked by RSPLCK
2:2	RWS_L	0x0	unused2: Note: Locked by RSPLCK



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x304		Function: 2	
Bit	Attr	Default	Description
1:1	RWS_L	0x0	unused1: <i>Note:</i> Locked by RSPLCK
0:0	RWS_L	0x0	unused0: <i>Note:</i> Locked by RSPLCK

8.8.62 iiofferrst, iiofnerrst

IIO Core Fatal FERR and NERR Status.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x308, 0x31c		Function: 2	
Bit	Attr	Default	Description
6:0	ROS_V	0x0	iio_core_error_status_log: The error status log indicates which error is causing the report of the first error event. The encoding indicates the corresponding bit position of the error in the error status register.

8.8.63 iiofferrhd_[0:3]


IIO Core Fatal FERR Header.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x30c, 0x310, 0x314, 0x318		Function: 2	
Bit	Attr	Default	Description
31:0	ROS_V	0x0	iio_core_error_header_log: Logs the first DWORD of the header on an error condition.

8.8.64 iionferrst, iionnerst

IIO Core Non-Fatal FERR and NERR Status.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x320, 0x334		Function: 2	
Bit	Attr	Default	Description
6:0	ROS_V	0x0	iio_core_error_status_log: The error status log indicates which error is causing the report of the first error event. The encoding indicates the corresponding bit position of the error in the error status register.



8.8.65 iionferrhd_[0:3]

IIO Core Non-Fatal FERR Header.

Header log stores the IIO data path header information of the associated IIO core error. The header indicates where the error is originating from and the address of the cycle.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x324, 0x328, 0x32c, 0x330		Function: 2	
Bit	Attr	Default	Description
31:0	ROS_V	0x0	iio_core_error_header_log: The error status log indicates which error is causing the report of the first error event. The encoding indicates the corresponding bit position of the error in the error status register.

8.8.66 iioerrcntsel

IIO Core Error Counter Selection.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x33c		Function: 2	
Bit	Attr	Default	Description
6:6	RW_L	0x0	c6:
5:5	RW_L	0x0	c5:
4:4	RW_L	0x0	c4:
3:3	RW_L	0x0	thirteen_msi_address_error_select: 1
2:2	RW_L	0x0	twofive_core_header_queue_parity_error_select: 1
1:1	RW_L	0x0	onetwo_dma_or_vt_d_access_xing_64_bit_boundary_error_select: 1
0:0	RW_L	0x0	reserved: 1

8.8.67 iioerrcnt

IIO Core Error Counter.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x340		Function: 2	
Bit	Attr	Default	Description
7:7	RW1CS	0x0	errorf: 0: No overflow occurred1: Error overflow. The error count may not be valid.



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x340		Function: 2	
Bit	Attr	Default	Description
6:0	RW1CS	0x0	errcnt: This counter accumulates errors that occur when the associated error type is selected in the ERRCNTSEL register. Notes: This register is cleared by writing 7Fh. Maximum counter available is 127d (7Fh).

8.8.68 mierrst

Miscellaneous Error Status.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x380		Function: 2	
Bit	Attr	Default	Description
4:4	RW1CS	0x0	RSVD
3:3	RW1CS	0x0	vpp_err_sts:
2:2	RW1CS	0x0	RSVD
1:1	RW1CS	0x0	RSVD
0:0	RW1CS	0x0	RSVD

8.8.69 mierrctl

Miscellaneous Error Control.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x384		Function: 2	
Bit	Attr	Default	Description
4:4	RWS	0x0	dfx_inj_err:
3:3	RWS	0x0	vpp_err_sts:
2:2	RWS	0x0	jtag_tap_sts:
1:1	RWS	0x0	smbus_port_sts: This bit has no effect.
0:0	RWS	0x0	cfg_reg_par:



8.8.70 mifferrst, mifnerrst

Miscellaneous Fatal FERR and NERR Status.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x388, 0x39c		Function: 2	
Bit	Attr	Default	Description
10:0	ROS_V	0x0	mi_err_st_log:

8.8.71 mifferrhdr_[0:3]

Miscellaneous Fatal FERR Header Log.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x38c, 0x390, 0x394, 0x398		Function: 2	
Bit	Attr	Default	Description
31:0	ROS_V	0x0	hdr:

8.8.72 minferrst, minnerrst

Miscellaneous Non-Fatal FERR and NERR Status.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x3a0, 0x3b4		Function: 2	
Bit	Attr	Default	Description
10:0	ROS_V	0x0	mi_err_st_log:

8.8.73 minferrhdr_[0:3]

Miscellaneous Non-Fatal FERR Header Log.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x3a4, 0x3a8, 0x3ac, 0x3b0		Function: 2	
Bit	Attr	Default	Description
31:0	ROS_V	0x0	hdr:



8.8.74 mierrcntsel

Miscellaneous Error Count Select.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x3bc		Function: 2	
Bit	Attr	Default	Description
4:4	RW	0x0	dfx_inj_err:
3:3	RW	0x0	vpp_err_sts:
2:2	RW	0x0	jtag_tap_sts:
1:1	RW	0x0	smbus_port_sts: This bit has no effect.
0:0	RW	0x0	cfg_reg_par:

8.8.75 mierrcnt

Miscellaneous Error Count.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x3c0		Function: 2	
Bit	Attr	Default	Description
7:7	RW1CS	0x0	errovflow: 0: No overflow occurred1: Error overflow. The error count may not be valid.
6:0	RW1CS	0x0	errcnt: This counter accumulates errors that occur when the associated error type is selected in the ERRCNTSEL register. Notes: This register is cleared by writing 7Fh. Maximum counter available is 127d (7Fh).

8.9 Device 5 Function 4

I/OxAPCI Configuration Space.

Register Name	Offset	Size
vid	0x0	16
did	0x2	16
pcicmd	0x4	16
pcists	0x6	16
rid	0x8	8
ccr	0x9	24
clsr	0xc	8
hdr	0xe	8
mbar	0x10	32
svid	0x2c	16
sid	0x2e	16



Register Name	Offset	Size
capptr	0x34	8
intlin	0x3c	8
intpin	0x3d	8
abar	0x40	16
pxpcap	0x44	32
snapshot_index	0x80	8
snapshot_window	0x90	32
ioapictetpc	0xa0	32
pmcap	0xe0	32
pmcsr	0xe4	32
ioadsels0	0x288	32
ioadsels1	0x28c	32
iointsrc0	0x2a0	32
iointsrc1	0x2a4	32
ioremintcnt	0x2a8	32
ioremgpecnt	0x2ac	32
FauxGV	0x2c4	32

8.9.1 vid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x0		Function: 4	
Bit	Attr	Default	Description
15:0	RO	0x8086	vendor_identification_number: 1

8.9.2 did

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2		Function: 4	
Bit	Attr	Default	Description
15:0	RO	0xe2c	device_identification_number: 1



8.9.3 pcicmd

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x4		Function: 4	
Bit	Attr	Default	Description
10:10	RO	0x0	intxdisable: 1
9:9	RO	0x0	fb2be: 1
8:8	RO	0x0	serre: 1
7:7	RO	0x0	idsel: 1
6:6	RO	0x0	perrrsp: 1
5:5	RO	0x0	vga: 1
4:4	RO	0x0	memwrinv: 1
3:3	RO	0x0	spcen: 1
2:2	RW	0x0	bme: 1
1:1	RW	0x0	mse: 1
0:0	RO	0x0	iose: 1

8.9.4 pcists

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x6		Function: 4	
Bit	Attr	Default	Description
15:15	RO_V	0x0	dpe: 1
14:14	RO	0x0	sse: 1
13:13	RO	0x0	rma: 1
12:12	RO	0x0	rta: 1
11:11	RW1C	0x0	sta: 1
10:9	RO	0x0	devselt: 1
8:8	RO	0x0	medierr: 1



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x6		Function: 4	
Bit	Attr	Default	Description
7:7	RO	0x0	fb2bcap: 1
5:5	RO	0x0	sixtysixmhzcap: 1
4:4	RO	0x1	capl: 1
3:3	RO	0x0	intxst: 1

8.9.5 rid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x8		Function: 4	
Bit	Attr	Default	Description
7:0	RO_V	0x0	revision_id: Reflects the Uncore Revision ID after reset. Reflects the Compatibility Revision ID after BIOS writes 0x69 to any RID register in any Intel® Xeon® Processor E5 v2 product family function. Implementation Note: Read and write requests from the host to any RID register in any Intel® Xeon® Processor E5 v2 product family function are re-directed to the IIO cluster. Accesses to the CCR field are also redirected due to DWORD alignment. It is possible that JTAG accesses are direct, so will not always be redirected.

8.9.6 CCR

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x9		Function: 4	
Bit	Attr	Default	Description
23:16	RO_V	0x80	base_class: Generic Device
15:8	RO_V	0x0	sub_class: Generic Device
7:0	RO_V	0x20	interface: 1



8.9.7 clsr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xc		Function: 4	
Bit	Attr	Default	Description
7:0	RW	0x0	clsr_reg: 1

8.9.8 hdr

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xe		Function: 4	
Bit	Attr	Default	Description
7:7	RO	0x1	multi_function_device: This bit defaults to 1b since all these devices are multi-function
6:0	RO	0x0	configuration_layout: This field identifies the format of the configuration header layout. It is Type 0 for all these devices. The default is 00h, indicating a 'endpoint device'.

8.9.9 mbar

I/OxAPIC Based Address.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x10		Function: 4	
Bit	Attr	Default	Description
31:12	RW	0x0	bar: This marks the 4 KB aligned 32-bit base address for memory-mapped registers of I/OxAPIC. Side note: Any accesses via message channel or JTAG mini port to registers pointed to by the MBAR address, are not gated by MSE bit (in PCICMD register) being set, that is, even if MSE bit is a 0, message channel accesses to the registers pointed to by MBAR address are allowed completed normally. These accesses are accesses from internal ucode/pcode and JTAG and they are allowed to access the registers normally even if this bit is clear.
3:3	RO	0x0	prefetchable: The I/OxAPIC registers are not prefetchable.
2:1	RO	0x0	type: The IOAPIC registers can only be placed below 4G system address space.
0:0	RO	0x0	memory_space: This Base Address Register indicates memory space.



8.9.10 svid

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2c		Function: 4	
Bit	Attr	Default	Description
15:0	RW_O	0x8086	svid_reg: The default value specifies Intel but can be set to any value once after reset.



8.9.11 sid

This value is used to identify a particular subsystem.

Type:	CFG	PortID:	N/A	Function:	4
Bus:	0	Device:	5		
Offset:	0x2e				
Bit	Attr	Default	Description		
15:0	RW_O	0x0	sid_reg: Assigned by the subsystem vendor to uniquely identify the subsystem.		

8.9.12 capptr

Type:	CFG	PortID:	N/A	Function:	4
Bus:	0	Device:	5		
Offset:	0x34				
Bit	Attr	Default	Description		
7:0	RO	0x44	capability_pointer: Points to the first capability structure for the device which is the PCIe capability.		

8.9.13 intlin

Type:	CFG	PortID:	N/A	Function:	4
Bus:	0	Device:	5		
Offset:	0x3c				
Bit	Attr	Default	Description		
7:0	RO	0x0	intlin_reg:		

8.9.14 intpin

Type:	CFG	PortID:	N/A	Function:	4
Bus:	0	Device:	5		
Offset:	0x3d				
Bit	Attr	Default	Description		
7:0	RO	0x0	intpin_reg:		



8.9.15 abar

I/OxAPIC Alternate BAR.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x40		Function: 4	
Bit	Attr	Default	Description
15:15	RW	0x0	abar_enable: When set, the range FECX_YZ00 to FECX_YZFF is enabled as an alternate access method to the I/OxAPIC registers and these addresses are claimed by the IIO's internal I/OxAPIC regardless of the setting the MSE bit in the IOxAPIC config space. Bits 'XYZ' are defined below. Side note: Any accesses via message channel or JTAG mini port to registers pointed to by the ABAR address, are not gated by this bit being set i.e. even if this bit is a 0, message channel accesses to the registers pointed to by ABAR address are allowed/completed normally. These accesses are accesses from internal ucode/pcode and JTAG and they are allowed to access the registers normally even if this bit is clear.
11:8	RW	0x0	base_address_19: 16 (XBAD) These bits determine the high order bits of the I/O APIC address map. When a memory address is recognized by the IIO which matches FECX_YZ00-to-FECX_YZFF, the IIO will respond to the cycle and access the internal I/O APIC.
7:4	RW	0x0	base_address_15: 12 (YBAD) These bits determine the low order bits of the IO APIC address map. When a memory address is recognized by the IIO which matches FECX_YZ00-to-FECX_YZFF, the IIO will respond to the cycle and access the internal I/O APIC.
3:0	RW	0x0	base_address_11: 8 (ZBAD) These bits determine the low order bits of the I/O APIC address map. When a memory address is recognized by the IIO which matches FECX_YZ00-to-FECX_YZFF, the IIO will respond to the cycle and access the internal I/O APIC.

8.9.16 pxpcap

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x44		Function: 4	
Bit	Attr	Default	Description
29:25	RO	0x0	interrupt_message_number: 1
24:24	RO	0x0	slot_implemented:
23:20	RO	0x9	device_port_type: Device type is Root Complex Integrated Endpoint
19:16	RO	0x1	capability_version: PCI Express Capability is Compliant with Version 1.0 of the PCI Express Spec. Note: This capability structure is not compliant with Versions beyond 1.0, since they require additional capability registers to be reserved. The only purpose for this capability structure is to make enhanced configuration space available. Minimizing the size of this structure is accomplished by reporting version 1.0 compliancy and reporting that this is an integrated root port device. As such, only three Dwords of configuration space are required for this structure.
15:8	RO	0xe0	next_ptr: Pointer to the next capability. Set to 0 to indicate there are no more capability structures, else default value



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x44		Function: 4	
Bit	Attr	Default	Description
7:0	RO	0x10	capability_idat: Provides the PCI Express capability ID assigned by PCI-SIG.

8.9.17 snapshot_index

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x80		Function: 4	
Bit	Attr	Default	Description
7:0	RW	0x0	ssidx:

8.9.18 snapshot_window

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x90		Function: 4	
Bit	Attr	Default	Description
31:0	RO_V	0x0	sswindow:

8.9.19 ioapictetpc

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xa0		Function: 4	
Bit	Attr	Default	Description
16:16	RW	0x0	cbdma0_inta: 0: srcint is connected to IOAPIC table entry 7 1: srcint is connected to IOAPIC table entry 23 Notes: This bit should never be set.
12:12	RW	0x0	ntb_int: 0: srcint is connected to IOAPIC table entry 16 1: srcint is connected to IOAPIC table entry 23 Notes: This bit was not used by RTL. NTB interrupt is always mapped to entry 23.
10:10	RW	0x0	port3c_intb: 0: srcint is connected to IOAPIC table entry 21 1: srcint is connected to IOAPIC table entry 19
8:8	RW	0x0	port3a_intb: 0: srcint is connected to IOAPIC table entry 20 1: srcint is connected to IOAPIC table entry 17
6:6	RW	0x0	port2c_intb: 0: srcint is connected to IOAPIC table entry 13 1: srcint is connected to IOAPIC table entry 11



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xa0		Function: 4	
Bit	Attr	Default	Description
4:4	RW	0x0	port2a_intb: 0: srcint is connected to IOAPIC table entry 12 1: srcint is connected to IOAPIC table entry 9
0:0	RW	0x0	port0_intb: 0: srcint is connected to IOAPIC table entry 1 1: srcint is connected to IOAPIC table entry 3

8.9.20 pmcap

Power Management Capabilities.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xe0		Function: 4	
Bit	Attr	Default	Description
31:27	RO	0x0	pme_support: Bits 31, 30 and 27 must be set to '1' for PCI-PCI bridge structures representing ports on root complexes.
26:26	RO	0x0	d2_support: I/OxAPIC does not support power management state D2
25:25	RO	0x0	d1_support: I/OxAPIC does not support power management state D1
24:22	RO	0x0	aux_current:
21:21	RO	0x0	device_specific_initialization:
19:19	RO	0x0	pme_clock: This field is hardwired to 0h as it does not apply to PCI Express.
18:16	RW_O	0x3	version: This field is set to 3h (PM 1.2 compliant) as version number. Bit is RW-O to make the version 2h incase legacy OS'es have any issues.
15:8	RO	0x0	next_pointer: This is the last capability in the chain and hence set to 0.
7:0	RO	0x1	capability_id: Provides the PM capability ID assigned by PCI-SIG.

8.9.21 pmcsr

Power Management Control and Status.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xe4		Function: 4	
Bit	Attr	Default	Description
31:24	RO	0x0	data: Not relevant for I/OxAPIC
23:23	RO	0x0	bpcce: Not relevant for I/OxAPIC



Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0xe4		Function: 4	
Bit	Attr	Default	Description
22:22	RO	0x0	b2b3: Not relevant for I/OxAPIC
15:15	RO	0x0	pmests: Not relevant for I/OxAPIC
14:13	RO	0x0	dscl: Not relevant for I/OxAPIC
12:9	RO	0x0	dsel: Not relevant for I/OxAPIC
8:8	RO	0x0	pmeen: Not relevant for I/OxAPIC
3:3	RO	0x1	rstd3hotd0: Indicates I/OxAPIC does not reset its registers when transitioning from D3hot to D0.
1:0	RW_V	0x0	power_state: This 2-bit field is used to determine the current power state of the function and to set a new power state as well. 00: D0 01: D1 (not supported by IOAPIC) 10: D2 (not supported by IOAPIC) 11: D3_hot If Software tries to write 01 or 10 to this field, the power state does not change from the existing power state (which is either D0 or D3hot) and nor do these bits1:0 change value. When in D3hot state, I/OxAPIC will a) respond to only Type 0 configuration transactions targeted at the device's configuration space, when in D3hot state c) will not respond to memory (that is, D3hot state is equivalent to MSE), accesses to MBAR region (note: ABAR region access still go through in D3hot state, if it enabled) d) will not generate any MSI writes

8.9.22 loadsel0

I/OxAPIC DSELS Register 0.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x288		Function: 4	
Bit	Attr	Default	Description
28:28	RWS	0x0	sw2ipc_aer_negedge_msk:
27:27	RWS	0x0	sw2ipc_aer_event_sel:
26:0	RWS	0x0	gttcfg2S1pciOADels0: gttcfg2S1pciOADels0[26:0]



8.9.23 loadsels1

I/OxAPIC DSELS Register 1.

Type: CFG Bus: 0 Offset: 0x28c		PortID: N/A Device: 5		Function: 4
Bit	Attr	Default	Description	
17:0	RWS	0x0	gttcfg2SipclOADels1: gttcfg2SipclOADels1[17:0]	

8.9.24 iointsrc0

IO Interrupt Source Register 0.

Type: CFG Bus: 0 Offset: 0x2a0		PortID: N/A Device: 5		Function: 4
Bit	Attr	Default	Description	
31:0	RW_V	0x0	int_src0: bit interrupt source 31: INTD Port 3b 30: INTC Port 3b 29: INTB Port 3b 28: INTA Port 3b 27: INTD Port 3a 26: INTC Port 3a 25: INTB Port 3a 24: INTA Port 3a 23: INTD Port 1b 22: INTC Port 1b 21: INTB Port 1b 20: INTA Port 1b 19: INTD Port 1a 18: INTC Port 1a 17: INTB Port 1a 16: INTA Port 1a 15: INTD Port 2d 14: INTC Port 2d 13: INTB Port 2d 12: INTA Port 2d 11: INTD Port 2c 10: INTC Port 2c 9: INTB Port 2c 8: INTA Port 2c 7: INTD Port 2b 6: INTC Port 2b 5: INTB Port 2b 4: INTA Port 2b 3: INTD Port 2a 2: INTC Port 2a 1: INTB Port 2a 0: INTA Port 2a	



8.9.25 iointsrc1


IO Interrupt Source Register 1.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2a4		Function: 4	
Bit	Attr	Default	Description
20:0	RW_V	0x0	int_src1: bit interrupt source 20: INTA Root Port Core 19: INTB ME KT 18: INTC ME IDE-R 17: INTD ME HECI 16: INTA ME HECI 15: INTD CB DMA 14: INTC CB DMA 13: INTB CB DMA 12: INTA CB DMA 11: INTD Port ODMI 10: INTC Port ODMI 9: INTB Port ODMI 8: INTA Port ODMI 7: INTD Port 3d 6: INTC Port 3d 5: INTB Port 3d 4: INTA Port 3d 3: INTD Port 3c 2: INTC Port 3c 1: INTB Port 3c 0: INTA Port 3c

8.9.26 ioremintcnt

Remote IO Interrupt Count.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2a8		Function: 4	
Bit	Attr	Default	Description
31:0	RW_V	0x0	rem_int_cnt: Number of remote interrupts received.



8.9.27 ioremgpcnt

Remote IO GPE Count.

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2ac		Function: 4	
Bit	Attr	Default	Description
23:16	RW_V	0x0	hpgpe_cnt: Number of remote HPGPEs received.
15:8	RW_V	0x0	pmgpe_cnt: Number of remote PMGPEs received.
7:0	RW_V	0x0	gpe_cnt: Number of remote GPEs received.

8.9.28 FauxGV

Type: CFG		PortID: N/A	
Bus: 0		Device: 5	
Offset: 0x2c4		Function: 4	
Bit	Attr	Default	Description
0:0	RWS_L	0x0	FauxGVEn: Enable Fault GV.

8.10 Device 5 Function 4 I/OxAPIC

I/OxAPIC has a direct memory mapped space. An index/data register pair is located within the directed memory mapped region and is used to access the redirection table entries. The offsets shown in the table are from the base address in either ABAR or MBAR or both.

Notes:

Access to addresses beyond 0x40h return all 0s.

Only addresses up to offset 0xFF can be accessed via the ABAR register whereas offsets up to 0xFFF can be accessed via MBAR.

Only aligned DWORD reads and write are allowed towards the I/OxAPIC memory space. Any other accesses will result in an error.

Register Name	Offset	Size
index	0x0	8
window	0x10	32
eoi	0x40	8



8.10.1 index

The Index Register will select which indirect register appears in the window register to be manipulated by software. Software will program this register to select the desired APIC internal register.

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x0		Function: 4	
Bit	Attr	Default	Description
7:0	RW_L	0x0	idx: Indirect register to access.

8.10.2 window

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x10		Function: 4	
Bit	Attr	Default	Description
31:0	RW_LV	0x0	window_reg: Data to be written to the indirect registers on writes, and location of read data from the indirect register on reads.

8.10.3 eoi

Type: MEM		PortID: 8'h7e	
Bus: 0		Device: 5	
Offset: 0x40		Function: 4	
Bit	Attr	Default	Description
7:0	RW_L	0x0	eoi_reg: The EOI register is present to provide a mechanism to efficiently convert level interrupts to edge triggered MSI interrupts. When a write is issued to this register, the I/O(x)APIC will check the lower 8 bits written to this register, and compare it with the vector field for each entry in the I/O Redirection Table. When a match is found, the Remote_IRR bit for that I/O Redirection Entry will be cleared. Note that if multiple I/O Redirection entries, for any reason, assign the same vector, each of those entries will have the Remote_IRR bit reset to '0'. This will cause the corresponding I/OxAPIC entries to resample their level interrupt inputs and if they are still asserted, cause more MSI interrupt(s) (if unmasked) which will again set the Remote_IRR bit.

8.10.4 Device 5 Function 4 Window 0

Register Name	Offset	Size
apicid__window	0x0	32
ver__window	0x1	32
arbid__window	0x2	32
bcfg__window	0x3	32



Register Name	Offset	Size
rtl0__window	0x10	32
rth0__window	0x11	32
rtl1__window	0x12	32
rth1__window	0x13	32
rtl2__window	0x14	32
rth2__window	0x15	32
rtl3__window	0x16	32
rth3__window	0x17	32
rtl4__window	0x18	32
rth4__window	0x19	32
rtl5__window	0x1a	32
rth5__window	0x1b	32
rtl6__window	0x1c	32
rth6__window	0x1d	32
rtl7__window	0x1e	32
rth7__window	0x1f	32
rtl8__window	0x20	32
rth8__window	0x21	32
rtl9__window	0x22	32
rth9__window	0x23	32
rtl10__window	0x24	32
rth10__window	0x25	32
rtl11__window	0x26	32
rth11__window	0x27	32
rtl12__window	0x28	32
rth12__window	0x29	32
rtl13__window	0x2a	32
rth13__window	0x2b	32
rtl14__window	0x2c	32
rth14__window	0x2d	32
rtl15__window	0x2e	32
rth15__window	0x2f	32
rtl16__window	0x30	32
rth16__window	0x31	32
rtl17__window	0x32	32
rth17__window	0x33	32
rtl18__window	0x34	32
rth18__window	0x35	32
rtl19__window	0x36	32
rth19__window	0x37	32
rtl20__window	0x38	32
rth20__window	0x39	32
rtl21__window	0x3a	32



Register Name	Offset	Size
rth21__window	0x3b	32
rtl22__window	0x3c	32
rth22__window	0x3d	32
rtl23__window	0x3e	32
rth23__window	0x3f	32

8.10.4.1 apicid__window

This register uniquely identifies an APIC in the system. This register is not used by OS'es anymore and is still implemented in hardware because of FUD.

Type: MEM	PortID: N/A	Function: 4	
Bus: 0	Device: 5		
Offset: 0x0			
Bit	Attr	Default	Description
27:24	RW	0x0	apicid: Allows for up to 16 unique APIC IDs in the system.

8.10.4.2 ver__window

This register uniquely identifies an APIC in the system. This register is not used by OS'es anymore and is still implemented in hardware because of FUD.

Type: MEM	PortID: N/A	Function: 4	
Bus: 0	Device: 5		
Offset: 0x1			
Bit	Attr	Default	Description
23:16	RO	0x17	max: This is the entry number of the highest entry in the redirection table. It is equal to the number of interrupt inputs minus one. This field is hardwired to 17h to indicate 24 interrupts.
15:15	RO	0x0	prq: This bit is set to 0 to indicate that this version of the I/OxAPIC does not implement the IRQ Assertion register and does not allow PCI devices to write to it to cause interrupts.
7:0	RO	0x20	vs: This identifies the implementation version. This field is hardwired to 20h indicate this is an I/OxAPIC.

8.10.4.3 arbid__window

This is a legacy register carried over from days of serial bus interrupt delivery. This register has no meaning in IIO. It just tracks the APICID register for compatibility reasons.



Type: MEM Bus: 0 Offset: 0x2		PortID: N/A Device: 5 Function: 4	
Bit	Attr	Default	Description
27:24	RO	0x0	arbitration_id: Just tracks the APICID register.

8.10.4.4 bcfg__window

Type: MEM Bus: 0 Offset: 0x3		PortID: N/A Device: 5 Function: 4	
Bit	Attr	Default	Description
0:0	RW	0x1	boot_configuration: This bit is a default1 to indicate FSB delivery mode. A value of 0 has no effect. Its left as RW for software compatibility reasons.

8.10.4.5 rti[0:23]__window

The information in this register along with Redirection Table High DWORD register is used to construct the MSI interrupt. There is one of these pairs of registers for every interrupt. The first interrupt has the redirection registers at offset 10h. The second interrupt at 12h, third at 14h, etc. until the final interrupt (interrupt 23) at 3Eh.

Type: MEM Bus: 0 Offset: 0x10, 0x12, 0x14, 0x16, 0x18, 0x1a, 0x1c, 0x1e, 0x20, 0x22, 0x24, 0x26, 0x28, 0x2a, 0x2c, 0x2e, 0x30, 0x32, 0x34, 0x36, 0x38, 0x3a, 0x3c, 0x3e		PortID: N/A Device: 5 Function: 4	
Bit	Attr	Default	Description
17:17	RW	0x0	disable_flushing: This bit has no meaning in IIO. This bit is R/W for software compatibility reasons only
16:16	RW	0x1	msk: When cleared, an edge assertion or level (depending on bit 15 in this register) on the corresponding interrupt input results in delivery of an MSI interrupt using the contents of the corresponding redirection table high/low entry. When set, an edge or level on the corresponding interrupt input does not cause MSI Interrupts and no MSI interrupts are held pending as well (i.e. if an edge interrupt asserted when the mask bit is set, no MSI interrupt is sent and the hardware does not remember the event to cause an MSI later when the mask is cleared). When set, assertion/deassertion of the corresponding interrupt input causes Assert/Deassert_INTx messages to be sent to the legacy ICH, provided the 'Disable PCI INTx Routing to ICH' bit is clear. If the latter is set, Assert/Deassert_INTx messages are not sent to the legacy ICH. When mask bit goes from 1 to 0 for an entry and the entry is programmed for level input, the input is sampled and if asserted, an MSI is sent. Also, if an Assert_INTx message was previously sent to the legacy ICH/internal-coalescing logic on behalf of the entry, when the mask bit is clear, then a Deassert_INTx event is scheduled on behalf of the entry (whether this event results in a Deassert_INTx message to the legacy ICH depends on whether there were other outstanding Deassert_INTx messages from other sources). When the mask bit goes from 0 to 1, and the corresponding interrupt input is already asserted, an Assert_INTx event is scheduled on behalf of the entry. Note though that if the interrupt is deasserted when the bit transitions from 0 to 1, a Deassert_INTx is not scheduled on behalf of the entry.



8.10.4.6 rth[0:23]__window

Type: MEM PortID: N/A Bus: 0 Device: 5 Function: 4 Offset: 0x11, 0x13, 0x15, 0x17, 0x19, 0x1b, 0x1d, 0x1f, 0x21, 0x23, 0x25, 0x27, 0x29, 0x2b, 0x2d, 0x2f, 0x31, 0x33, 0x35, 0x37, 0x39, 0x3b, 0x3d, 0x3f			
Bit	Attr	Default	Description
31:24	RW	0x0	did: They are bits [19:12] of the MSI address.
23:16	RW	0x0	edid: These bits become bits [11:4] of the MSI address.

8.11 Device 6-7 Function 0,1,3

Register Name	Offset	Size	Device 6 Function	Device 7 Function
rx_ctle_peak_gen2	0x694	32	0,1,3	0
rx_ctle_peak_gen3	0x698	32	1,3	0

8.11.1 rx_ctle_peak_gen2

This register controls the Continuous Time Linear Equalizer (CTLE) setting for the named receiver bundles on the selected port on the PCIe interface in Gen. 2 mode.

Type: CFG PortID: N/A Bus: 0 Device: 6 Function: 0 Offset: 0x694			
Bit	Attr	Default	Description
7:4	RWS_L	0x8	bndl1:
3:0	RWS_L	0x8	bndl0:

8.11.2 rx_ctle_peak_gen2

This register controls the Continuous Time Linear Equalizer (CTLE) setting for the named receiver bundles on the selected port on the PCIe interface in Gen. 2 mode.

Type: CFG PortID: N/A Bus: 0 Device: 6 Function: 1 Offset: 0x694			
Bit	Attr	Default	Description
15:12	RWS_L	0x8	bndl3:
11:8	RWS_L	0x8	bndl2:
7:4	RWS_L	0x8	bndl1:
3:0	RWS_L	0x8	bndl0:



8.11.3 rx_ctle_peak_gen3

This register controls the Continuous Time Linear Equalizer (CTLE) setting for the named receiver bundles on the selected port on the PCIe interface in Gen. 3 mode.

Type: CFG		PortID: N/A	
Bus: 0		Device: 6	
Offset: 0x698		Function: 1	
Bit	Attr	Default	Description
15:12	RWS_L	0x8	bndI3:
11:8	RWS_L	0x8	bndI2:
7:4	RWS_L	0x8	bndI1:
3:0	RWS_L	0x8	bndI0:

8.11.4 rx_ctle_peak_gen2

This register controls the Continuous Time Linear Equalizer (CTLE) setting for the named receiver bundles on the selected port on the PCIe interface in Gen. 2 mode.

Type: CFG		PortID: N/A	
Bus: 0		Device: 6	
Bus: 0		Device: 7	
Offset: 0x694		Function: 3	
		Function: 0	
Bit	Attr	Default	Description
31:28	RWS_L	0x8	bndI7:
27:24	RWS_L	0x8	bndI6:
23:20	RWS_L	0x8	bndI5:
19:16	RWS_L	0x8	bndI4:
15:12	RWS_L	0x8	bndI3
11:8	RWS_L	0x8	bndI2
7:4	RWS_L	0x8	bndI1
3:0	RWS_L	0x8	bndI0

8.11.5 rx_ctle_peak_gen3

This register controls the Continuous Time Linear Equalizer (CTLE) setting for the named receiver bundles on the selected port on the PCIe interface in Gen. 3 mode.

Type: CFG		PortID: N/A	
Bus: 0		Device: 6	
Bus: 0		Device: 7	
Offset: 0x698		Function: 3	
		Function: 0	
Bit	Attr	Default	Description
31:28	RWS_L	0xd	bndI7
27:24	RWS_L	0xd	bndI6
23:20	RWS_L	0xd	bndI5
19:16	RWS_L	0xd	bndI4
15:12	RWS_L	0xd	bndI3



Type: CFG		PortID: N/A		Function: 3	
Bus: 0		Device: 6		Function: 0	
Bus: 0		Device: 7			
Offset: 0x698					
Bit	Attr	Default	Description		
11:8	RWS_L	0xd	bndl2		
7:4	RWS_L	0xd	bndl1		
3:0	RWS_L	0xd	bndl0		

8.12 Non Transparent Bridge Registers

8.12.1 Configuration Register Map (NTB Primary Side)

This section covers the NTB primary side configuration space registers.

Bus 0, Device 3, Function 0 can function in three modes: PCI Express Root Port, NTB/NTB and NTB/RP. When configured as an NTB there are two sides to discuss for configuration registers. The primary side of the NTB's configuration space is located on Bus 0, Device 3, Function 0 with respect to and a secondary side of the NTB's configuration space is located on some enumerated bus on another system and does not exist as configuration space on the local system anywhere.

Table 8-5. Device 3 Function 0 (Non-Transparent Bridge) Configuration Map Offset 0x00h - 0xFCh

DID		VID		0h	MSIXMSGCTRL	MSIXNXTPT R	MSIXCAPID	80h	
PCISTS		PCICMD		4h	TABLEOFF_BIR			84h	
CCR			RID	8h	PBAOFF_BIR			88h	
BIST	HDR	PLAT	CLSR	Ch				8Ch	
PB01BASE				10h	PXPCAP	PXPNTPTR	PXPCAPID	90h	
				14h	DEVCAP			94h	
PB23BASE				18h	DEVSTS	DEVCTRL		98h	
				1Ch				9Ch	
PB45BASE				20h				A0h	
				24h				A4h	
				28h				A8h	
SDID		SVID		2Ch				ACh	
				30h				B0h	
			CAPPTR	34h				B4h	
				38h				B8h	
MAXLAT	MINGNT	INTPIN	INTL	3Ch				BCh	
				40h				C0h	
				44h				C4h	
				48h				C8h	
				4Ch				CCh	
				50h	SBAR45SZ	SBAR23SZ	PBAR45SZ	PBAR23SZ	D0h
				54h	PPD			D4h	
				58h				D8h	



Table 8-5. Device 3 Function 0 (Non-Transparent Bridge) Configuration Map Offset 0x00h - 0xFCh

			5Ch		DCh
MSIMSGCTL	MSINXTPTR	MSICAPID	60h	PMCAP	E0h
MSGADR			64h	PMCSR	E4h
MSGDAT			68h		E8h
MSIMSK			6Ch		ECh
MISIPENDING			70h		F0h
			74h		F4h
			78h		F8h
			7Ch	FCh	

Table 8-6. Device 3 Function 0 (Non-Transparent Bridge) Configuration Map Offset 0x100h - 0x1FCh

XPREUT_HDR_EXT		100h	PERFCTRLSTS		180h
XPREUT_HDR_CAP		104h			184h
XPREUT_HDR_LEF		108h	MISCCTRLSTS		188h
		10Ch			18Ch
ACSCAPHDR		110h		PCIE_IOU_BIF_CTRL	190h
ACSCTRL	ACSCAP	114h	NTBDEVCAP		194h
		118h			198h
		11Ch	LNKCAP		19Ch
		120h	LNKSTS	LNKCON	1A0h
		124h	SLTCAP		1A4h
		128h	SLTSTS	SLTCON	1A8h
		12Ch	ROOTCAP	ROOTCON	1ACh
		130h	ROOTSTS		1B0h
		134h	DEVCAP2		1B4h
		138h		DEVCTRL2	1B8h
		13Ch	LNKCAP2		1BCh
APICLIMIT	APICBASE	140h	LNKSTS2	LNKCON2	1C0h
VSECPHDR		144h			1C4h
VSHDR		148h			1C8h
UNCERRSTS		14Ch			1CCh
UNCERRMSK		150h	ERRINJCAP		1D0h
UNCERRSEV		154h	ERRINJHDR		1D4h
CORERRSTS		158h		ERRINJCON	1D8h
CORERRMSK		15Ch			1DCh
ERRCAP		160h	CTOCTRL		1E0h
HDRLOG0		164h			1E4h
HDRLOG1		168h			1E8h
HDRLOG2		16Ch			1ECh
HDRLOG3		170h			1F0h



Table 8-6. Device 3 Function 0 (Non-Transparent Bridge) Configuration Map Offset 0x100h - 0x1FCh

RPERRCMD	174h		1F4h
RPERRSTS	178h		1F8h
ERRSID	17Ch		1FCh

Table 8-7. Device 3 Function 0 (Non-Transparent Bridge) Configuration Map Offset 0x200h - 0x2FCh

XPCORERRSTS		200h	LER_CAP	280h
XPCORERRMSK		204h	LER_HDR	284h
XPUNCERRSTS		208h	LER_CTRLSTS	288h
XPUNCERRMSK		20Ch	LER_UNCERRMSK	28Ch
XPUNCERRSEV		210h	LER_XPUNCERRMSK	290h
	XPUNCERR PTR	214h	LER_RPERRMSK	294h
UNCEDMASK		218h		298h
COREDMASK		21Ch		29Ch
RPEDMASK		220h		2A0h
XPUNCEDMASK		224h		2A4h
XPCOREDMSK		228h		2A8h
		22Ch		2ACh
XPGLBERRPTR	XPGLBERRSTS	230h		2B0h
		234h		2B4h
		238h		2B8h
		23Ch		2BCh
		240h		2C0h
		244h		2C4h
		248h		2C8h
		24Ch		2CCh
PXP2CAP		250h		2D0h
LNKCON3		254h		2D4h
LNERRSTS		258h		2D8h
LN1EQ	LN0EQ	25Ch		2DCh
LN3EQ	LN2EQ	260h		2E0h
LN5EQ	LN4EQ	264h		2E4h
LN7EQ	LN6EQ	268h		2E8h
LN9EQ	LN8EQ	26Ch		2ECh
LN11EQ	LN10EQ	270h	XPPMDFXMAT0	2F0h
LN13EQ	LN12EQ	274h		2F4h
LN15EQ	LN14EQ	278h	XPPMDFXMSK0	2F8h
		27Ch	XPPMDFXMSK1	2FCh



8.12.2 Standard PCI Configuration Space - Type 0 Common Configuration Space

This section covers primary side registers in the 0x0 to 0x3F region that are common to Bus 0, Device 3. Comments at the top of the table indicate what devices/functions the description applies to. Exceptions that apply to specific functions are noted in the individual bit descriptions.

Note: Several registers will be duplicated for device 3 in the three sections discussing the three modes it operates in RP, NTB/NTB, and NTB/RP primary and secondary but are repeated here for readability.

Primary side configuration registers (device 3) can only be read by the local host.

8.12.2.1 VID: Vendor Identification

VID Bus: 0 Device: 3Function: 0Offset: 0			
Bit	Attr	Default	Description
15:0	RO	8086h	Vendor Identification Number The value is assigned by PCI-SIG to Intel.

8.12.2.2 DID: Device Identification Register

DID Bus: 0 Device: 3Function: 0Offset: 2			
Bit	Attr	Default	Description
15:0	RO-V		Device Identification Number This PCI Express Root Port 3.a device ID as follows: 0x3C08: PCI Express Root Port Mode 0x3C0D: Non-Transparent Bridge Primary NTB/NTB mode 0x3C0E: Non-Transparent Bridge Primary NTB/RP mode 0x3C0F: Non-Transparent Bridge Secondary (at BDF = M/N/0 accessed from the secondary side) Port3_NTB: Attr: RO-V Default: 3C0Dh

8.12.2.3 PCICMD: PCI Command

This register defines the PCI 3.0 compatible command register values applicable to PCI Express space.

PCICMD Bus: 0 Device: 3Function: 0Offset: 4			
Bit	Attr	Default	Description
15:11	RV	0h	Reserved



PCICMD Bus: 0 Device: 3Function: 0Offset: 4			
Bit	Attr	Default	Description
10	RW	0b	<p>Interrupt Disable</p> <p>Controls the ability of the PCI Express port to generate INTx messages on its own behalf. This bit does not affect the ability of the RP to forward interrupt messages received from the PCI Express port, to the internal I/OxAPIC block. However, this bit controls the internal generation of legacy INTx interrupts for PCI Express RAS events or for INTx interrupts due to HP/PM events or for BW change notification.</p> <p>In NTB mode:</p> <p>1: Legacy INTx Interrupt mode is disabled</p> <p>0: Legacy INTx Interrupt mode is enabled and the NTB port can generate INTx interrupts to system</p> <p>Note: If a root port had previously generated an Assert_INTx interrupt when this bit transitions from 0 to 1, then the root port generates a Deassert_INTx message to indicate the interrupt is deasserted.</p>
9	RO	0b	<p>Fast Back-to-Back Enable</p> <p>Not applicable to PCI Express and is hardwired to 0</p>
8	RW	0b	<p>SERR Enable</p> <p>This field enables notifying the internal core error logic of occurrence of an uncorrectable error (fatal or non-fatal) at the NTB port. The internal core error logic of IIO then decides if/how to escalate the error further (pins/message etc.). This bit also controls the propagation of PCI Express ERR_FATAL and ERR_NONFATAL messages received from the port to the internal IIO core error logic.</p> <p>1: Fatal and Non-fatal error generation and Fatal and Non-fatal error message forwarding is enabled</p> <p>0: Fatal and Non-fatal error generation and Fatal and Non-fatal error message forwarding is disabled</p> <p>Refer to PCI Express Base Specification, Revision 2.0 for details of how this bit is used in conjunction with other control bits in the Root Control register for forwarding errors detected on the PCI Express interface to the system core error logic.</p>
7	RO	0b	<p>IDSEL Stepping/Wait Cycle Control</p> <p>Not applicable to internal IIO devices. Hardwired to 0.</p>
6	RW	0b	<p>Parity Error Response</p> <p>IIO ignores this bit and always does ECC/parity checking and signaling for data/address of transactions both to and from IIO. This bit though affects the setting of bit 8 in the PCISTS register.</p>
5	RO	0b	<p>VGA palette snoop Enable</p> <p>Not applicable to PCI Express must be hardwired to 0.</p>
4	RO	0b	<p>Memory Write and Invalidate Enable</p> <p>Not applicable to PCI Express must be hardwired to 0.</p>
3	RO	0b	<p>Special Cycle Enable</p> <p>Not applicable to PCI Express must be hardwired to 0.</p>



PCICMD Bus: 0 Device: 3Function: 0Offset: 4			
Bit	Attr	Default	Description
2	RW	0b	<p>Bus Master Enable Controls the ability of the PCI Express port in generating and also in forwarding memory (including MSI writes) or I/O transactions (and not messages) or configuration transactions from the secondary side to the primary side.</p> <p>1: Enables the PCI Express port to a) generate MSI writes internally for AER/HP/PM events (note: there are several other RP MSI related control/enable bits. See the PCI Express Base Specification, Revision 2.0 for complete details) and also to b) forward memory (including MSI writes from devices south of the RP), config or I/O read/write requests from secondary to primary side</p> <p>0: The Bus Master is disabled. When this bit is 0, IIO root ports will a) treat upstream PCI Express memory writes/reads, IO writes/reads, and configuration reads and writes as unsupported requests (and follow the rules for handling unsupported requests). This behavior is also true towards transactions that are already pending in the IIO root port's internal queues when the BME bit is turned off. b) mask the root port from generating MSI writes internally for AER/HP/PM events at the root port.</p> <p>In NTB mode: When this bit is Set = 1b, the PCIe NTB will forward Memory Requests upstream from the secondary interface to the primary interface. When this bit is Cleared = 0b, the PCIe NTB will not forward Memory Requests from the secondary to the primary interface and will drop all posted memory write requests and will return Unsupported Requests UR for all non-posted memory read requests.</p> <p>Notes: MSI/MSI-X interrupt Messages are in-band memory writes, setting the Bus Master Enable bit = 0b disables MSI/MSI-X interrupt Messages as well. Requests other than Memory or I/O Requests are not controlled by this bit.</p>
1	RW	0b	<p>Memory Space Enable In PCIe mode: 1: Enables a PCI Express port's memory range registers, with the exception of the I/OxAPIC range register ('APICBASE: APIC Base Register (APICBASE)' and 'APICLIMIT: APIC Limit Register (APICLIMIT)'), to be decoded as valid target addresses for transactions from primary side. 0: Disables a PCI Express port's memory range registers, with the exception of the I/OxAPIC range register ('APICBASE: APIC Base Register (APICBASE)' and 'APICLIMIT: APIC Limit Register (APICLIMIT)'), to be decoded as valid target addresses for transactions from primary side.</p> <p>In NTB mode: 1: Enables NTB primary BARs to be decoded as valid target addresses for transactions from primary side. 0: Disables NTB primary BARs to be decoded as valid target addresses for transactions from primary side.</p> <p>Notes: The I/OxAPIC address range of a root port has its own enable bit. This bit is not ever used by hardware to decode transactions from the secondary side of the root port.</p>
0	RO	0b	<p>IO Space Enable 1: Enables the I/O address range, defined in the IOBASE and IOLIM registers of the PCI-to-PCI bridge header, for target decode from primary side 0: Disables the I/O address range, defined in the IOBASE and IOLIM registers of the PCI-to-PCI bridge header, for target decode from primary side</p> <p>Notes: This bit is not ever used by hardware to decode transactions from the secondary side of the root port. NTB does not support I/O space accesses. Hardwired to 0</p>



8.12.2.4 PCISTS: PCI Status

PCISTS Bus: 0 Device: 3Function: 0Offset: 6			
Bit	Attr	Default	Description
15	RW1C	0b	<p>Detected Parity Error</p> <p>This bit is set by a device when it receives a packet on the primary side with an uncorrectable data error (i.e. a packet with poison bit set or an uncorrectable data ECC error was detected at the XP-DP interface when ECC checking is done) or an uncorrectable address/control parity error. The setting of this bit is regardless of the Parity Error Response bit (PERRE) in the PCICMD register.</p>
14	RW1C	0b	<p>Signaled System Error</p> <p>1: The root port reported fatal/non-fatal (and not correctable) errors it detected on its PCI Express interface to the IIO core error logic (which might eventually escalate the error through the ERR[2:0] pins or message to cpu core or message to PCH). Note that the SERRE bit in the PCICMD register must be set for a device to report the error the IIO core error logic. Software clears this bit by writing a '1' to it. This bit is also set (when SERR enable bit is set) when a FATAL/NON-FATAL message is forwarded to the IIO core error logic. Note that IIO internal 'core' errors (like parity error in the internal queues) are not reported via this bit.</p> <p>0: The root port did not report a fatal/non-fatal error</p> <p>In NTB mode:</p> <p>1: The device reported fatal/non-fatal (and not correctable) errors it detected on NTB interface. Software clears this bit by writing a '1' to it. Note that IIO internal 'core' errors (like parity error in the internal queues) are not reported via this bit.</p> <p>0: The device did not report a fatal/non-fatal error.</p>
13	RW1C	0b	<p>Received Master Abort</p> <p>This bit is set when a device experiences a master abort condition on a transaction it mastered on the primary interface (IIO internal bus). Note that certain errors might be detected right at the PCI Express interface and those transactions might not 'propagate' to the primary interface before the error is detected (e.g. accesses to memory above TOCM in cases where the PCIe interface logic itself might have visibility into TOCM). Such errors do not cause this bit to be set, and are reported via the PCI Express interface error bits (secondary status register).</p>
12	RW1C	0b	<p>Received Target Abort</p> <p>This bit is set when a device experiences a completer abort condition on a transaction it mastered on the primary interface (uncore internal bus). Note that certain errors might be detected right at the PCI Express interface and those transactions might not 'propagate' to the primary interface before the error is detected (for example, accesses to memory above VTBAR). Such errors do not cause this bit to be set, and are reported via the PCI Express interface error bits (secondary status register).</p> <p>In NTB Mode:</p> <p>Set when a p2p read resulted in CA status</p>
11	RW1C	0b	<p>Signaled Target Abort</p> <p>This bit is set when a root port signals a completer abort completion status on the primary side (internal bus of uncore). This condition includes a PCI Express port forwarding a completer abort status received on a completion from the secondary</p> <p>In NTB Mode:</p> <p>This bit is set when the NTB port forwards a completer abort (CA) completion status from the secondary interface to the primary interface.</p>
10:9	RO	0h	<p>DEVSEL# Timing</p> <p>Not applicable to PCI Express. Hardwired to 0.</p>
8	RW1C	0b	<p>Master Data Parity Error</p> <p>This bit is set if the Parity Error Response bit in the PCI Command register is set and the Requestor receives a poisoned completion on the primary interface or Requestor forwards a poisoned write request (including MSI/MSI-X writes) from the secondary interface to the primary interface.</p>
7	RO	0b	<p>Fast Back-to-Back</p> <p>Not applicable to PCI Express. Hardwired to 0.</p>
6	RV	0h	Reserved




PCISTS Bus: 0 Device: 3Function: 0Offset: 6			
Bit	Attr	Default	Description
5	RO	0b	pci bus 66MHz capable Not applicable to PCI Express. Hardwired to 0.
4	RO	1b	Capabilities List This bit indicates the presence of a capabilities list structure
3	RO-V	0b	INTx Status This Read-only bit reflects the state of the interrupt in the PCI Express Root Port. Only when the Interrupt Disable bit in the command register is a 0 and this Interrupt Status bit is a 1, will this device generate INTx interrupt. Setting the Interrupt Disable bit to a 1 has no effect on the state of this bit. This bit does not get set for interrupts forwarded to the root port from downstream devices in the hierarchy. When MSI are enabled, Interrupt status should not be set. The intx status bit should be deasserted when all the relevant events (RAS errors/HP/link change status/PM) internal to the port using legacy interrupts are cleared by software. In NTB Mode: When Set, indicates that an INTx emulation interrupt is pending internally in the Function. NTB clears this bit when the internal interrupt condition is cleared by software. Note this bit could be set even when INTx assertion is disabled (and INTx mode is enabled though) but an internal interrupt condition is pending.
2:0	RV	0h	Reserved

8.12.2.5 RID: Revision Identification

RID Bus: 0 Device: 3Function: 0Offset: 8			
Bit	Attr	Default	Description
7:0	RO	00h	Revision Identification Reflects the Uncore Revision ID after reset. Reflects the Compatibility Revision ID after BIOS writes 0x69 to any RID register in any Processor function. Implementation Note: Read and write requests from the host to any RID register in any Processor function are re-directed to the IIO cluster. Accesses to the CCR field are also redirected due to DWORD alignment. It is possible that JTAG accesses are direct, so will not always be redirected.

8.12.2.6 CCR: Class Code

CCR Bus: 0 Device: 3Function: 0Offset: 9			
Bit	Attr	Default	Description
23:16	RO	06h	Base Class For PCI Express NTB port this field is hardwired to 06h, indicating it is a 'Bridge Device'.
15:8	RO-V		Sub-Class In NTB mode, this field hardwired to 80h to indicate a 'Other bridge type'. In PCIe mode, it is hardwired to 04h indicating 'PCI-PCI Bridge'. Port3_NTB: Attr: RO-V Default: 80h Port3_PCIe: Attr: RO-V Default: 04h
7:0	RO	00h	Register-Level Programming Interface This field is hardwired to 00h for PCI Express NTB port.



8.12.2.7 CLSR: Cacheline Size

CLSR Bus: 0 Device: 3Function: 0Offset: C			
Bit	Attr	Default	Description
7:0	RW	0h	Cacheline Size This register is set as RW for compatibility reasons only. Cacheline size for IIO is always 64B. IIO hardware ignore this setting.

8.12.2.8 HDR: Header Type

HDR Bus: 0 Device: 3Function: 0Offset: E			
Bit	Attr	Default	Description
7	RO-V	1b	Multi-function Device This bit defaults to 0 for PCI Express NTB port. BIOS can individually control the value of this bit, based on HDR_TYPCTRL register. BIOS will write to that register to change this field to 0, if it exposes only function 0 in the device to OS.
6:0	RO		Configuration Layout This field identifies the format of the configuration header layout. It is Type1 for PCI Express and Type0 in NTB mode. The default is 00h, indicating a 'non-bridge function'. Port3_NTB: Attr: RO Default: 00h Port3_PClE: Attr: RO Default: 01h

8.12.2.9 SVID: Subsystem Vendor ID

Device 3, Function 0, Offset 2Ch. This register exist in both RP and NTB modes. It is documented in RP Section 11.2.29.

8.12.2.10 SDID: Subsystem Identity

Device 3, Function 0, Offset 2Eh. This register exist in both RP and NTB modes. It is documented in RP Section 11.2.30

8.12.2.11 CAPPTR: Capability Pointer

CAPPTR Bus: 0 Device: 3Function: 0Offset: 34			
Bit	Attr	Default	Description
7:0	RW-O	60h	Capability Pointer Points to the first capability structure for the device. In NTB mode, capabilities start at a different location.



8.12.2.12 INTL: Interrupt Line

Bus: 0 Device: 3Function: 0Offset: 3C			
Bit	Attr	Default	Description
7:0	RW	00h	Interrupt Line This bit is RW for devices that can generate a legacy INTx message and is needed only for compatibility purposes.

8.12.2.13 INTPIN: Interrupt Pin

INTPIN Bus: 0 Device: 3Function: 0Offset: 3D			
Bit	Attr	Default	Description
7:0	RW-O	01h	Interrupt Pin This field defines the type of interrupt to generate for the port. 01h: Generate INTA Others: Reserved BIOS can program this to 0 to indicate to OS that the port does not support INTx interrupt.

8.12.3 NTB Port 3A Configured as Primary Endpoint Device

8.12.3.1 PB01BASE: Primary BAR 0/1 Base Address

This register is used to setup the primary side NTB configuration space

PB01BASE Bus: 0 Device: 3Function: 0Offset: 10			
Bit	Attr	Default	Description
63:16	RW	0h	Primary BAR 0/1 Base Sets the location of the BAR written by SW on a 64KB alignment
15:4	RV	0h	Reserved
3	RO	1b	Prefetchable BAR points to Prefetchable memory.
2:1	RO	10b	Type Memory type claimed by BAR 0/1 is 64-bit addressable.
0	RO	0b	Memory Space Indicator BAR resource is memory (as opposed to I/O).



8.12.3.2 PB23BASE: Primary BAR 2/3 Base Address

The register is used by the processor on the primary side of the NTB to setup a 64b prefetchable memory window.

PB23BASE Bus: 0 Device: 3Function: 0Offset: 18			
Bit	Attr	Default	Description
63:12	RW	0h	Primary BAR 2/3 Base Sets the location of the BAR written by SW NOTE: The number of bits that are writable in this register is dictated by the value loaded into the "PBAR23SZ: Primary BAR 2/3 Size" on page 452 by the BIOS at initialization time (before BIOS PCI enumeration). PBAR23SZ indicates the lowest order bit of this register field that is writeable where valid values are 12-39. If PBAR23SZ is set to 12, all bits are writeable. If set to 39, then bits 38:12 are Read Only and will return values of 0. NOTE: For the special case where PBAR23SZ = '0', bits 63:0 are all RO='0' resulting in the BAR being disabled. NOTE: The lowest order address bit is 12 to enforce a minimum granularity of 4 KB.
11:4	RV	0h	Reserved
3	RO	1b	Prefetchable BAR points to Prefetchable memory.
2:1	RO	10b	Type Memory type claimed by BAR 2/3 is 64-bit addressable.
0	RO	0b	Memory Space Indicator BAR resource is memory (as opposed to I/O).

8.12.3.3 PB45BASE: Primary BAR 4/5 Base Address

The register is used by the processor on the primary side of the NTB to setup a second 64b prefetchable memory window.

PB45BASE Bus: 0 Device: 3Function: 0Offset: 20			
Bit	Attr	Default	Description
63:12	RW	0h	Primary BAR 4/5 Base Sets the location of the BAR written by SW NOTE: The number of bits that are writable in this register is dictated by the value loaded into the Section 8.12.3.23, "PBAR45SZ: Primary BAR 4/5 Size" on page 452 by the BIOS at initialization time (before BIOS PCI enumeration). PBAR45SZ indicates the lowest order bit of this register field that is writeable where valid values are 12-39. If PBAR45SZ is set to 12, all bits are writeable. If set to 39, then bits 38:12 are Read Only and will return values of 0. Notes: For the special case where PBAR45SZ = '0', bits 63:0 are all RO='0' resulting in the BAR being disabled. The lowest order address bit is 12 to enforce a minimum granularity of 4 KB.
11:4	RV	0h	Reserved
3	RO	1b	Prefetchable BAR points to Prefetchable memory.
2:1	RO	10b	Type Memory type claimed by BAR 4/5 is 64-bit addressable.
0	RO	0b	Memory Space Indicator BAR resource is memory (as opposed to I/O).



8.12.3.4 MSICAPID: MSI Capability ID

Device 3, Function 0, Offset 60h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.32](#).

8.12.3.5 MSINXTPTR: MSI Next Pointer

Device 3, Function 0, Offset 61h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.33](#).

8.12.3.6 MSIMSGCTL: MSI Control

Device 3, Function 0, Offset 62h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.34](#).

8.12.3.7 MSGADR: MSI Address

Device 3, Function 0, Offset 64h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.35](#).

8.12.3.8 MSGDAT: MSI Data Register

Device 3, Function 0, Offset 68h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.36](#).

8.12.3.9 MSIMSK: MSI Mask Bit Register

The Mask Bit register enables software to disable message sending on a per-vector basis.

MSIMSK Bus: 0 Device: 3Function: 0Offset: 6Ch			
Bit	Attr	Default	Description
31:2	RV	0h	Reserved
1:0	RW	0b	Mask Bits For each Mask bit that is set, the PCI Express port is prohibited from sending the associated message. NTB supports up to 2 messages. Corresponding bits are masked if set to '1'

8.12.3.10 MISIPENDING: MSI Pending Bit Register

The Mask Pending register enables software to defer message sending on a per-vector basis.

MISIPENDING Bus: 0 Device: 3Function: 0Offset: 70h			
Bit	Attr	Default	Description
31:2	RV	0h	Reserved
1:0	RO-V	0h	Pending Bits For each Pending bit that is set, the PCI Express port has a pending associated message. NTB supports up to 2 messages. Corresponding bits are pending if set to '1'



8.12.3.11 MSIXCAPID: MSI-X Capability ID Register

MSIXCAPID Bus: 0 Device: 3Function: 0Offset: 80h			
Bit	Attr	Default	Description
7:0	RO	11h	Capability ID Assigned by PCI-SIG for MSI-X.

8.12.3.12 MSIXNXTPTR: MSI-X Next Pointer Register

MSIXNXTPTR Bus: 0 Device: 3Function: 0Offset: 81h			
Bit	Attr	Default	Description
7:0	RW-O	90h	Next Ptr This field is set to 90h for the next capability list (PCI Express capability structure) in the chain.

8.12.3.13 MSIXMSGCTRL: MSI-X Message Control Register

MSIXMSGCTRL Bus: 0 Device: 3Function: 0Offset: 82h			
Bit	Attr	Default	Description
15	RW	0b	MSI-X Enable Software uses this bit to select between INTx or MSI or MSI-X method for signaling interrupts from the DMA 0: NTB is prohibited from using MSI-X to request service 1: MSI-X method is chosen for NTB interrupts Note: Software must disable INTx and MSI-X for this device when using MSI
14	RW	0b	Function Mask 1: all the vectors associated with the NTB are masked, regardless of the per vector mask bit state. 0: each vector's mask bit determines whether the vector is masked or not. Note: Setting or clearing the MSI-X function mask bit has no effect on the state of the per-vector Mask bit.
13:11	RV	0h	Reserved
10:0	RO-V	003h	Table Size System software reads this field to determine the MSI-X Table Size N, which is encoded as N-1. For example, a returned value of '00000000011' indicates a table size of 4. NTB table size is 4, encoded as a value of 003h

8.12.3.14 TABLEOFF_BIR: MSI-X Table Offset and BAR Indicator


TABLEOFF_BIR Bus: 0 Device: 3Function: 0Offset: 84h			
Bit	Attr	Default	Description
31:3	RO	000004 00h	Table Offset MSI-X Table Structure is at offset 8K from the PB01BASE address. See PXPAPID for the start of details relating to MSI-X registers.



TABLEOFF_BIR Bus: 0 Device: 3Function: 0Offset: 84h			
Bit	Attr	Default	Description
2:0	RO	0h	<p>Table BIR</p> <p>Indicates which one of a function's Base Address registers, located beginning at 10h in Configuration Space, is used to map the function's MSI-X Table into Memory Space.</p> <p>BIR Value Base Address register</p> <p>0: 10h 1: 14h 2: 18h 3: 1Ch 4: 20h 5: 24h 6: Reserved 7: Reserved</p> <p>For a 64-bit Base Address register, the Table BIR indicates the lower DWORD.</p>

8.12.3.15 PBAOFF_BIR: MSI-X Pending Array Offset and BAR Indicator

PBAOFF_BIR Bus: 0 Device: 3Function: 0Offset: 88h			
Bit	Attr	Default	Description
31:3	RO	00000600h	<p>Table Offset</p> <p>MSI-X PBA Structure is at offset 12K from the PB01BASE BAR address. See PMSICXPBA register for details.</p>
2:0	RO	0h	<p>PBA BIR</p> <p>Indicates which one of a function's Base Address registers, located beginning at 10h in Configuration Space, is used to map the function's MSI-X Table into Memory Space.</p> <p>BIR Value Base Address register</p> <p>0: 10h 1: 14h 2: 18h 3: 1Ch 4: 20h 5: 24h 6: Reserved 7: Reserved</p> <p>For a 64-bit Base Address register, the Table BIR indicates the lower DWORD.</p>



8.12.3.16 PXPCAPID: PCI Express Capability Identity Register

Device 3, Function 0, Offset 90h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.39](#).

8.12.3.17 PXPNTPTR: PCI Express Next Pointer

Device 3, Function 0, Offset 91h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.40](#).

8.12.3.18 PXPCAP: PCI Express Capabilities Register

Device 3, Function 0, Offset 92h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.41](#).

8.12.3.19 DEVCAP: PCI Express Device Capabilities Register

The PCI Express Device Capabilities register identifies device specific information for the device.

DEVCAP Bus: 0 Device: 3Function: 0Offset: 94h			
Bit	Attr	Default	Description
31:29	RV	0h	Reserved
28	RO	0b	Function Level Reset Capability A value of 1b indicates the Function supports the optional Function Level Reset mechanism. NTB does not support this functionality.
27:26	RO	0h	Captured Slot Power Limit Scale Does not apply to RPs or integrated devices This value is hardwired to 00h NTB is required to be able to receive the Set_Slot_Power_Limit message without error but simply discard the Message value. <i>Note:</i> PCI Express Base Specification, Revision 2.0 states Components with Endpoint, Switch, or PCI Express-PCI Bridge Functions that are targeted for integration on an adapter where total consumed power is below the lowest limit defined for the targeted form factor are permitted to ignore Set_Slot_Power_Limit Messages, and to return a value of 0 in the Captured Slot Power Limit Value and Scale fields of the Device Capabilities register
25:18	RO	0h	Captured Slot Power Limit Value Does not apply to RPs or integrated devices This value is hardwired to 00h NTB is required to be able to receive the Set_Slot_Power_Limit message without error but simply discard the Message value. <i>Note:</i> PCI Express Base Specification, Revision 2.0 states Components with Endpoint, Switch, or PCI Express-PCI Bridge Functions that are targeted for integration on an adapter where total consumed power is below the lowest limit defined for the targeted form factor are permitted to ignore Set_Slot_Power_Limit Messages, and to return a value of 0 in the Captured Slot Power Limit Value and Scale fields of the Device Capabilities register
17:16	RV	0h	Reserved
15	RO	1b	Role Based Error Reporting IIO is 1.1 compliant and so supports this feature
14	RO	0b	Power Indicator Present on Device Does not apply to RPs or integrated devices
13	RO	0b	Attention Indicator Present Does not apply to RPs or integrated devices




DEVCAP Bus: 0 Device: 3Function: 0Offset: 94h			
Bit	Attr	Default	Description
12	RO	0b	Attention Button Present Does not apply to RPs or integrated devices
11:9	RO	0b	Endpoint L1 Acceptable Latency Does not apply to IIO RCiEP (Link does not exist between host and RCiEP)
8:6	RO	0b	Endpoint L0s Acceptable Latency Does not apply to IIO RCiEP (Link does not exist between host and RCiEP)
5	RO	1b	Extended Tag Field Supported IIO devices support 8-bit tag 1: Maximum Tag field is 8 bits (NTB Mode Only) 0: Maximum Tag field is 5 bits
4:3	RO	0h	Phantom Functions Supported IIO does not support phantom functions.00b = No Function Number bits are used for Phantom Functions
2:0	RO	1h	Max Payload Size Supported IIO supports 256B payloads on PCI Express ports001b = 256 bytes max payload size

8.12.3.20 DEVCTRL: PCI Express Device Control Register

The PCI Express Device Control register controls PCI Express specific capabilities parameters associated with the device.

DEVCTRL Bus: 0 Device: 3Function: 0Offset: 98h			
Bit	Attr	Default	Description
15	RV	0h	Reserved
14:12	RO	000b	Max_Read_Request_Size Express/DMI ports in IIO do not generate requests greater than 128B and this field is ignored.
11	RO	0b	Enable No Snoop Not applicable since the NTB is never the originator of a TLP. This bit has no impact on forwarding of NoSnoop attribute on peer requests.
10	RO	0b	Auxiliary Power Management Enable Not applicable to IIO
9	RO	0b	Phantom Functions Enable Not applicable to IIO since it never uses phantom functions as a requester.
8	RO	0h	Extended Tag Field Enable This bit enables the PCI Express port to use an 8-bit Tag field as a requester.
7:5	RW	000b	Max Payload Size This field is set by configuration software for the maximum TLP payload size for the PCI Express port. As a receiver, the IIO must handle TLPs as large as the set value. As a requester (i.e. for requests where IIO's own RequesterID is used), it must not generate TLPs exceeding the set value. Permissible values that can be programmed are indicated by the Max_Payload_Size_Supported in the Device Capabilities register:000: 128B max payload size 001: 256B max payload size (applies only to standard PCI Express ports and DMI port aliases to 128B) Others: alias to 128B This field is RW for PCI Express ports.
4	RO	0b	Enable Relaxed Ordering When set, NTB will forward RO bit as is from secondary to primary side. When clear, RO bit always cleared on traffic forwarded from secondary to primary



DEVCTRL Bus: 0 Device: 3Function: 0Offset: 98h			
Bit	Attr	Default	Description
3	RW	0b	<p>Unsupported Request Reporting Enable</p> <p>Applies only to the PCI Express RP/PCI Express NTB secondary interface/DMI ports. This bit controls the reporting of unsupported requests that IIO itself detects on requests its receives from a PCI Express/DMI port.</p> <p>0: Reporting of unsupported requests is disabled 1: Reporting of unsupported requests is enabled.</p> <p>This bit is hard-wired to 0 in NTB mode.</p> <p>NTB primary side is a RCiEP with no RC event collector.</p> <p>PCI Express Base Specification, Revision 2.0. A Root Complex Integrated Endpoint that is not associated with a Root Complex Event Collector is permitted to hardwire this bit to 0b.</p>
2	RW	0b	<p>Fatal Error Reporting Enable</p> <p>Applies only to the PCI Express RP/PCI Express NTB secondary interface/DMI ports. Controls the reporting of fatal errors that IIO detects on the PCI Express/DMI interface.</p> <p>0: Reporting of Fatal error detected by device is disabled 1: Reporting of Fatal error detected by device is enabled</p> <p>This bit is hard-wired to 0 in NTB mode.</p> <p>NTB primary side is a RCiEP with no RC event collector.</p> <p>PCI Express Base Specification, Revision 2.0 states. A Root Complex Integrated Endpoint that is not associated with a Root Complex Event Collector is permitted to hardwire this bit to 0b.</p>
1	RW	0b	<p>Non Fatal Error Reporting Enable</p> <p>Applies only to the PCI Express RP/PCI Express NTB secondary interface/DMI ports. Controls the reporting of non-fatal errors that IIO detects on the PCI Express/DMI interface.</p> <p>0: Reporting of Non Fatal error detected by device is disabled 1: Reporting of Non Fatal error detected by device is enabled</p> <p>This bit is hard-wired to 0 in NTB mode.</p> <p>NTB primary side is a RCiEP with no RC event collector.</p> <p>PCI Express Base Specification, Revision 2.0 states. A Root Complex Integrated Endpoint that is not associated with a Root Complex Event Collector is permitted to hardwire this bit to 0b.</p>
0	RW	0b	<p>Correctable Error Reporting Enable</p> <p>Applies only to the PCI Express RP/PCI Express NTB secondary interface/DMI ports. Controls the reporting of correctable errors that IIO detects on the PCI Express/DMI interface.</p> <p>0: Reporting of link Correctable error detected by the port is disabled 1: Reporting of link Correctable error detected by port is enabled</p> <p>This bit is hard-wired to 0 in NTB mode.</p> <p>NTB primary side is a RCiEP with no RC event collector.</p> <p>PCI Express Base Specification, Revision 2.0 states. A Root Complex Integrated Endpoint that is not associated with a Root Complex Event Collector is permitted to hardwire this bit to 0b.</p>

8.12.3.21 DEVSTS: PCI Express Device Status Register

The PCI Express Device Status register provides information about PCI Express device specific parameters associated with the device.

DEVSTS Bus: 0 Device: 3Function: 0Offset: 9Ah			
Bit	Attr	Default	Description
15:6	RV	0h	Reserved
5	RO	0h	<p>Transactions Pending</p> <p>Does not apply to Root ports, i.e. bit hardwired to 0 for these devices.</p>



DEVSTS Bus: 0 Device: 3Function: 0Offset: 9Ah			
Bit	Attr	Default	Description
4	RO	0b	AUX Power Detected Does not apply to IIO.
3	RW1C	0b	Unsupported Request Detected This bit applies only to the root/DMI ports. This bit indicates that the NTB primary detected an Unsupported Request. Errors are logged in this register regardless of whether error reporting is enabled or not in the Device Control Register. 1: Unsupported Request detected at the device/port. These unsupported requests are NP requests inbound that the RP received and it detected them as unsupported requests (e.g. address decoding failures that the RP detected on a packet, receiving inbound lock reads, BME bit is clear etc.). Note that this bit is not set on peer2peer completions with UR status that are forwarded by the RP to the PCIe link. 0: No unsupported request detected by the RP
2	RW1C	0b	Fatal Error Detected This bit indicates that a fatal (uncorrectable) error is detected by the NTB primary device. Errors are logged in this register regardless of whether error reporting is enabled or not in the Device Control register. 1: Fatal errors detected 0: No Fatal errors detected
1	RW1C	0b	Non Fatal Error Detected This bit gets set if a non-fatal uncorrectable error is detected by the NTB primary device. Errors are logged in this register regardless of whether error reporting is enabled or not in the Device Control register. 1: Non Fatal errors detected 0: No non-Fatal Errors detected
0	RW1C	0b	Correctable Error Detected This bit gets set if a correctable error is detected by the NTB primary device. Errors are logged in this register regardless of whether error reporting is enabled or not in the PCI Express Device Control register. 1: correctable errors detected 0: No correctable errors detected

8.12.3.22 PBAR23SZ: Primary BAR 2/3 Size

This register contains a value used to set the size of the memory window requested by the 64-bit BAR 2/3 pair for the Primary side of the NTB.

PBAR23SZ Bus: 0 Device: 3Function: 0Offset: D0h			
Bit	Attr	Default	Description
7:0	RW-O	00h	Primary BAR 2/3 Size Value indicating the size of 64-bit BAR 2/3 pair on the Primary side of the NTB. This value is loaded by BIOS prior to enumeration. The value indicates the number of bits that will be Read-Only (returning 0 when read regardless of the value written to them) during PCI enumeration. Only legal settings are 12- 39, representing BAR sizes of 212 (4KB) through 239 (512GB) are valid. Note: Programming a value of '0' or any other value other than (12-39) will result in the BAR being disabled.

8.12.3.23 PBAR45SZ: Primary BAR 4/5 Size

This register contains a value used to set the size of the memory window requested by the 64-bit BAR 4/5 pair for the Primary side of the NTB.



PBAR45SZ Bus: 0 Device: 3Function: 0Offset: D1h			
Bit	Attr	Default	Description
7:0	RW-O	00h	Primary BAR 4/5 Size Value indicating the size of 64-bit BAR 2/3 pair. This value is loaded by BIOS prior to enumeration. The value indicates the number of bits that will be Read-Only (returning 0 when read regardless of the value written to them) during PCI enumeration. Only legal settings are 12- 39, representing BAR sizes of 212 (4KB) through 239 (512 GB) are valid. Notes: Programming a value of '0' or any other value other than (12-39) will result in the BAR being disabled.

8.12.3.24 SBAR23SZ: Secondary BAR 2/3 Size

This register contains a value used to set the size of the memory window requested by the 64-bit BAR 2/3 pair for the Secondary side of the NTB.

SBAR23SZ Bus: 0 Device: 3Function: 0Offset: D2h			
Bit	Attr	Default	Description
7:0	RW-O	00h	Secondary BAR 2/3 Size Value indicating the size of 64-bit BAR 2/3 pair on the Secondary side of the NTB. This value is loaded by BIOS prior to enumeration. The value indicates the number of bits that will be Read-Only (returning 0 when read regardless of the value written to them) during PCI enumeration. Only legal settings are 12- 39, representing BAR sizes of 212 (4 KB) through 239 (512 GB) are valid. Note: Programming a value of '0' or any other value other than (12-39) will result in the BAR being disabled.

8.12.3.25 SBAR45SZ: Secondary BAR 4/5 Size

This register contains a value used to set the size of the memory window requested by the 64-bit BAR 4/5 on the secondary side of the NTB.

SBAR45SZ Bus: 0 Device: 3Function: 0Offset: D3			
Bit	Attr	Default	Description
7:0	RW-O	00h	Secondary BAR 4/5 Size Value indicating the size of 64-bit BAR 2/3 pair on the Secondary side of the NTB. This value is loaded by BIOS prior to enumeration. The value indicates the number of bits that will be Read-Only (returning 0 when read regardless of the value written to them) during PCI enumeration. Only legal settings are 12- 39, representing BAR sizes of 212 (4 KB) through 239 (512 GB) are valid. NOTE: Programming a value of '0' or any other value other than (12-39) will result in the BAR being disabled.

8.12.3.26 PPD: PCIe Port Definition

This register defines the behavior of the PCIe port which can be either a RP, NTB connected to another NTB or an NTB connected to a Root Complex. This register is used to set the value in the DID register on the Primary side of the NTB (located at offset 02h). This value is loaded by BIOS prior to running PCI enumeration.



PPD Bus: 0 Device: 3Function: 0Offset: D4h			
Bit	Attr	Default	Description
7:6	RO	0h	Reserved
5	RW-V	0b	NTB Primary side - MSI-X Single Message Vector This bit when set, causes only a single MSI-X message to be generated if MSI-X is enabled. This bit affects the default value of the MSI-X Table Size field in the Section 8.12.3.13, "MSIXMSGCTRL: MSI-X Message Control Register" on page 447.
4	RO-V	0h	Crosslink Configuration Status This bit is written by hardware and shows the result of the NTBCROSSLINK. 1 - NTB port is configured as USD/DSP 2 - NTB port is configured as DSD/USP
3:2	RW-V	00b	Crosslink Control Directly forces the polarity of the NTB port to be either an Upstream Device (USD) or Downstream Device (DSD). 11 - Force NTB port to USD/DSP; 10 - Force NTB port to DSD/USP; 01 - 00 Reserved Notes: Bits 03:02 of this register only have meaning when bits 01:00 of this same register are programmed as '01'b (NTB/NTB). When configured as NTB/RP hardware directly sets port to DSD/USP so this field is not required. When using crosslink control override, the external strap PECFGSEL[2:0] must be set to '100'b (Wait-on-BIOS). xref BIOS can then come and set this field and then enable the port. In applications that are DP configuration, and having an external controller set up the crosslink control override through the SMBus master interface. PECFGSEL[2:0] must be set to '100'b (Wait-on-BIOS) on both chipsets. The external controller on the master can then set the crosslink control override field on both chipsets and then enable the ports on both chipsets.
1:0	RW-V	00b	Port Definition Value indicating the value to be loaded into the DID register (offset 02h). 00b - Transparent bridge 01b - 2 NTBs connected back to back 10b - NTB connected to a RP 11b - Reserved Note: When the DISNTSPB fuse is blown this field becomes RO '00'

8.12.3.27 PMCAP: Power Management Capabilities

Device 3, Function 0, Offset E0h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.59](#).

8.12.3.28 PMCSR: Power Management Control and Status

This register provides status and control information for PM events in the PCI Express port of the IIO.

PMCSR Bus: 0 Device: 3Function: 0Offset: E4h			
Bit	Attr	Default	Description
31:24	RO	00h	Data Not relevant for IIO
23	RO	0h	Bus Power/Clock Control Enable This field is hardwired to 0h as it does not apply to PCI Express.



PMCSR Bus: 0 Device: 3Function: 0Offset: E4h			
Bit	Attr	Default	Description
22	RO	0h	B2/B3 Support This field is hardwired to 0h as it does not apply to PCI Express.
21:16	RV	0h	Reserved
15	RW1CS	0h	PME Status Applies only to root ports. This PME Status is a sticky bit. This bit is set, independent of the PME Enable bit defined below, on an enabled PCI Express hotplug event. Software clears this bit by writing a '1' when it has been completed. Refer to PCI Express Base Specification, Revision 2.0 for further details on wake event generation at a root port. NTB Mode: This bit is hard-wired to read-only 0, since this function does not support PME# generation from any power state.
14:13	RO	0h	Data Scale Not relevant for IIO
12:9	RO	0h	Data Select Not relevant for IIO
8	RWS	0h	PME Enable Applies only to root ports. This field is a sticky bit and when set, enables a virtual PM_PME message to be generated internally on an enabled PCI Express hotplug event. This virtual PM_PME message then sets the appropriate bits in the ROOTSTS register (which can then trigger an MSI/INT or cause a _PMEGPE event). 0: Disable ability to send PME messages when an event occurs 1: Enables ability to send PME messages when an event occurs Not used in NTB mode.
7:4	RV	0h	Reserved
3	RW-O	1b	No Soft Reset Indicates IIO does not reset its registers when it transitions from D3hot to D0.
2	RV	0h	Reserved
1:0	RW-V	0h	Power State This 2-bit field is used to determine the current power state of the function and to set a new power state as well. 00: D0 01: D1 (not supported by IIO) 10: D2 (not supported by IIO) 11: D3_hot If Software tries to write 01 or 10 to this field, the power state does not change from the existing power state (which is either D0 or D3hot) and nor do these bits1:0 change value. All devices will respond to only Type 0 configuration transactions when in D3hot state (RP will not forward Type 1 accesses to the downstream link) and will not respond to memory/IO transactions (i.e. D3hot state is equivalent to MSE/IOSE bits being clear) as target and will not generate any memory/IO/configuration transactions as initiator on the primary bus (messages are still allowed to pass through).

8.12.3.29 XPREUT_HDR_EXT: REUT PCIe Header Extended

Device 3, Function 0, Offset 100h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.61](#).

8.12.3.30 XPREUT_HDR_CAP: REUT Header Capability

Device 3, Function 0, Offset 104h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.62](#).



8.12.3.31 XPREUT_HDR_LEF: REUT Header Leaf Capability

Device 3, Function 0, Offset 108h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.63](#).

8.12.3.32 ACSCAPHDR: Access Control Services Extended Capability Header

Device 3, Function 0, Offset 110h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.64](#).

8.12.3.33 ACSCAP: Access Control Services Capability Register

Device 3, Function 0, Offset 114h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.65](#).

8.12.3.34 ACCTRL: Access Control Services Control Register

Device 3, Function 0, Offset 116h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.66](#).

8.12.3.35 APICBASE: APIC Base Register

Device 3, Function 0, Offset 140h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.67](#).

8.12.3.36 APICLIMIT: APIC Limit Register

Device 3, Function 0, Offset 142h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.68](#).

8.12.3.37 VSECPHDR: Vendor Specific Enhanced Capability Header

Device 3, Function 0, Offset 144h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.69](#).

8.12.3.38 VSHDR: Vender Specific Header

This register identifies the capability structure and points to the next structure.

VSHDR Bus: 0 Device: 3Function: 0Offset: 148			
Bit	Attr	Default	Description
31:20	RO	03Ch	VSEC Length This field indicates the number of bytes in the entire VSEC structure, including the PCI Express Enhanced Capability header, the Vendor-Specific header, and the Vendor-Specific Registers.
19:16	RO	1h	VSEC Version Set to 1h for this version of the PCI Express logic
15:0	RO	0004h	VSEC ID Identifies Intel Vendor Specific Capability for AER on NTB

8.12.3.39 UNCERRSTS: Uncorrectable Error Status

Device 3, Function 0, Offset 14Ch. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.72](#).



8.12.3.40 UNCERRMSK: Uncorrectable Error Mask

Device 3, Function 0, Offset 150h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.73](#).

8.12.3.41 UNCERRSEV: Uncorrectable Error Severity

Device 3, Function 0, Offset 154h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.74](#).

8.12.3.42 CORERRSTS: Correctable Error Status

Device 3, Function 0, Offset 158h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.75](#).

8.12.3.43 CORERRMSK: Correctable Error Mask

Device 3, Function 0, Offset 15Ch. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.76](#).

8.12.3.44 ERRCAP: Advanced Error Capabilities and Control

Device 3, Function 0, Offset 160h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.77](#).

8.12.3.45 HDRLOG[0:3]: Header Log 0

This register contains the header log when the first error occurs. Headers of the subsequent errors are not logged.

HDRLOG[0:3] Bus: 0 Device: 3Function: 0Offset: 164, 168, 16C, 170			
Bit	Attr	Default	Description
31:0	ROS-V	000000 00h	Log of Header Dword 0 Logs the first DWORD of the header on an error condition

8.12.3.46 RPERRCMD: Root Port Error Command

Device 3, Function 0, Offset 174h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.79](#).

8.12.3.47 RPERRSTS: Root Port Error Status

The Root Error Status register reports status of error Messages (ERR_COR, ERR_NONFATAL, and ERR_FATAL) received by the Root Complex in IIO, and errors detected by the RP itself (which are treated conceptually as if the RP had sent an error Message to itself). The ERR_NONFATAL and ERR_FATAL Messages are grouped together as uncorrectable. Each correctable and uncorrectable (Non-fatal and Fatal) error source has a first error bit and a next error bit associated with it respectively. When an error is received by a Root Complex, the respective first error bit is set and the Requestor ID is logged in the Error Source Identification register. A set individual error status bit indicates that a particular error category occurred; software may clear an error status by writing a 1 to the respective bit. If software does not clear the first reported error before another error Message is received of the same category (correctable or



uncorrectable), the corresponding next error status bit will be set but the Requestor ID of the subsequent error Message is discarded. The next error status bits may be cleared by software by writing a 1 to the respective bit as well.


RPERRSTS Bus: 0 Device: 3Function: 0Offset: 178			
Bit	Attr	Default	Description
31:27	RO	0h	Advanced Error Interrupt Message Number Advanced Error Interrupt Message Number offset between base message data and the MSI/MSI-X message if assigned more than one message number. IIO hardware automatically updates this register to 0x1h if the number of messages allocated to the RP is 2. See bit 6:4 in Section 8.12.5.22, "MSICTRL: MSI Control" on page 490 for details of the number of messages allocated to a RP.
26:7	RO	0h	Reserved
6	RW1CS	0b	Fatal Error Messages Received Set when one or more Fatal Uncorrectable error Messages have been received.
5	RW1CS	0b	Non-Fatal Error Messages Received Set when one or more Non-Fatal Uncorrectable error Messages have been received.
4	RW1CS	0b	First Uncorrectable Fatal Set when bit 2 is set (from being clear) and the message causing bit 2 to be set is an ERR_FATAL message.
3	RW1CS	0b	Multiple Error Fatal/Nonfatal Received Set when either a fatal or a non-fatal error message is received and Error Fatal/Nonfatal Received is already set, i.e log from the 2nd Fatal or No fatal error message onwards
2	RW1CS	0b	Error Fatal/Nonfatal Received Set when either a fatal or a non-fatal error message is received and this bit is already not set. i.e. log the first error message. Note that when this bit is set bit 3 could be either set or clear.
1	RW1CS	0b	Multiple Correctable Error Received Set when either a correctable error message is received and Correctable Error Received bit is already set, i.e log from the 2nd Correctable error message onwards
0	RW1CS	0b	Correctable Error Received Set when a correctable error message is received and this bit is already not set. That is, log the first error message

8.12.3.48 ERRSID: Error Source Identification

Device 3, Function 0, Offset 17Ch. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.81](#).

8.12.3.49 PERFCTRLSTS: Performance Control and Status

PERFCTRLSTS Bus: 0 Device: 3Function: 0Offset: 180			
Bit	Attr	Default	Description
63:42	RV	0h	Reserved
41	RW	0b	TLP Processing Hint Disable When set, writes or reads with TPH=1, will be treated as if TPH=0.
40	RW	0b	DCA Requester ID Override When this bit is set, Requester ID match for DCA writes is bypassed. All writes from the port are treated as DCA writes and the tag field will convey if DCA is enabled or not and the target information.



PERFCTRLSTS Bus: 0 Device: 3Function: 0Offset: 180			
Bit	Attr	Default	Description
39:36	RV	0h	Reserved
35	RW	0b	Max read request completion combining size
34:21	RV	0h	Reserved
20:16	RW	18h	<p>Outstanding Requests for Gen1</p> <p>Number of outstanding RFOs and non-posted requests from a given PCIe port. This register controls the number of outstanding inbound non-posted requests - I/O, Config, Memory - (maximum length of these requests is a single 64B cacheline) that a Gen1 PCI Express downstream port can have. This register provides the value for the port when it is operating in Gen1 mode and for a link width of x4. The value of this parameter for the port when operating in x8/x16 width is obtained by multiplying this register by 2 and 4 respectively. BIOS programs this register based on the read latency to main memory.</p> <p>This register also specifies the number of RFOs that can be kept outstanding on IDI for a given port.</p> <p>The link speed of the port can change during a PCI Express hotplug event and the port must use the appropriate multiplier.</p> <p>A value of 1 indicates one outstanding pre-allocated request, 2 indicates two outstanding pre-allocated requests, and so on. If software programs a value greater than the buffer size the DMA engine supports, then the maximum hardware supported value is used.</p> <p>Current BIOS recommendation is to leave this field at it's default value.</p>
15:14	RV	0h	Reserved
13:8	RW	30h	<p>Outstanding Requests for Gen2</p> <p>Number of outstanding RFOs and non-posted requests from a given PCIe port. This register controls the number of outstanding inbound non-posted requests - I/O, Config, Memory - (maximum length of these requests is a single 64B cacheline) that a Gen2 PCI Express downstream port can have. This register provides the value for the port when it is operating in Gen2 mode and for a link width of x4. The value of this parameter for the port when operating in x8/x16 width is obtained by multiplying this register by 2 and 4 respectively. BIOS programs this register based on the read latency to main memory. For a port operating in Gen3 mode, a multiplier of x2 is applied.</p> <p>This register also specifies the number of RFOs that can be kept outstanding on IDI for a given port.</p> <p>The link speed of the port can change during a PCI Express hotplug event and the port must use the appropriate multiplier.</p> <p>A value of 1 indicates one outstanding pre-allocated request, 2 indicates two outstanding pre-allocated requests, and so on. If software programs a value greater than the buffer size the DMA engine supports, then the maximum hardware supported value is used.</p> <p>Current BIOS recommendation is to leave this field at it's default value.</p>
7	RW	1b	<p>Use Allocating Flows for 'Normal Writes'</p> <p>1: Use allocating flows for the writes that meet the following criteria. 0: Use non-allocating flows for writes that meet the following criteria (TPH=0 OR TPHDIS=1 OR (TPH=1 AND Tag=0 AND CIPCTRL[28]=1)) AND (NS=0 OR NoSnoopOpWrEn=0) AND Non-DCA Write</p> <p>Notes: When allocating flows are used for the above write types, IIO does not send a Prefetch Hint message. Current recommendation for BIOS is to just leave this bit at default of 1b. Note there is a coupling between the usage of this bit and bits 2 and 3. TPHDIS is bit 0 of this register NoSnoopOpWrEn is bit 3 of this register</p>
6:5	RV	0h	Reserved
4	RW	1b	Read Stream Interleave Size



PERFCTRLSTS Bus: 0 Device: 3Function: 0Offset: 180			
Bit	Attr	Default	Description
3	RW	0b	<p>Enable No-Snoop Optimization on Writes This applies to writes with the following conditions: NS=1 AND (TPH=0 OR TPHDIS=1)</p> <p>1: Inbound writes to memory with above conditions will be treated as non-coherent (no snoops) writes on Intel QPI 0: Inbound writes to memory with above conditions will be treated as allocating or non-allocating writes, depending on bit 4 in this register.</p> <p>Notes: If TPH=1 and TPHDIS=0 then NS is ignored and this bit is ignored Current recommendation for BIOS is to just leave this bit at default of 0b.</p>
2	RW	0b	<p>Enable No-Snoop Optimization on Reads This applies to reads with the following conditions: NS=1 AND (TPH=0 OR TPHDIS=1)</p> <p>1: When the condition is true for a given inbound read request to memory, it will be treated as non-coherent (no snoops) reads on Intel QPI. 0: When the condition is true for a given inbound read request to memory, it will be treated as normal snooped reads from PCIe (which trigger a PCIRdCurrent or DRd.UC on IDI).</p> <p>Notes: If TPH=1 and TPHDIS=0 then NS is ignored and this bit is ignored Current recommendation for BIOS is to just leave this bit at default of 0b.</p>
1	RW	0b	Disable reads bypassing other reads
0	RW	1b	Read Stream Policy

8.12.3.50 MISCCTRLSTS: Misc. Control and Status

MISCCTRLSTS Bus: 0 Device: 3Function: 0Offset: 188			
Bit	Attr	Default	Description
63:50	RV	0h	Reserved
49	RW1CS	0b	<p>Locked read timed out Indicates that a locked read request incurred a completion time-out on PCI Express/DMI</p>
48	RW1C	0b	<p>Received PME_TO_ACK Indicates that IIO received a PME turn off ack packet or it timed out waiting for the packet</p>
47:42	RV	0h	Reserved
41	RW	0b	<p>Override SocketID in Completion ID For TPH/DCA requests, the Completer ID can be returned with SocketID when this bit is set.</p>
40:39	RV	0h	Reserved
38	RW	0b	<p>'Problematic Port' for Lock Flows This bit is set by BIOS when it knows that this port is connected to a device that creates Posted-Posted dependency on its In-Out queues. Briefly, this bit is set on a link if: This link is connected to a Processor RP or Processor NTB port on the other side of the link IIO lock flows depend on the setting of this bit to treat this port in a special way during the flows. Note that if BIOS is setting up the lock flow to be in the 'Intel QPI compatible' mode then this bit must be set to 0.</p>



MISCCTRLSTS Bus: 0 Device: 3Function: 0Offset: 188			
Bit	Attr	Default	Description
37	RW	0b	Disable MCTP Broadcast to this link When set, this bit will prevent a broadcast MCTP message (w/ Routing Type of 'Broadcast from RC') from being sent to this link. This bit is provided as a general chicken bit in case there are devices that barf when they receive this message or for the case where p2p posted traffic is to be specifically prohibited to this port to avoid deadlocks, like can happen if this port is the 'problematic' port.
36	RWS	0b	Form-Factor Indicates what form-factor a particular root port controls 0 - CEM 1 - Express Module This bit is used to interpret bit 6 in the VPP serial stream for the port as either MRL# (CEM) input or EMLSTS# (Express Module) input.
35	RW	0b	Override System Error on PCIe Fatal Error Enable When set, fatal errors on PCI Express (that have been successfully propagated to the primary interface of the port) are sent to the IIO core error logic (for further escalation) regardless of the setting of the equivalent bit in the ROOTCTRL register. When clear, the fatal errors are only propagated to the IIO core error logic if the equivalent bit in "ROOTCON: PCI Express Root Control" register is set. For Device #0 in DMI mode and Device #3/Fn#0, unless this bit is set, DMI/NTB link related fatal errors will never be notified to system software.
34	RW	0b	Override System Error on PCIe Non-fatal Error Enable When set, non-fatal errors on PCI Express (that have been successfully propagated to the primary interface of the port) are sent to the IIO core error logic (for further escalation) regardless of the setting of the equivalent bit in the ROOTCTRL register. When clear, the non-fatal errors are only propagated to the IIO core error logic if the equivalent bit in "ROOTCON: PCI Express Root Control" register is set. For Device #0 in DMI mode and Dev#3/Fn#0, unless this bit is set, DMI/NTB link related non-fatal errors will never be notified to system software.
33	RW	0b	Override System Error on PCIe Correctable Error Enable When set, correctable errors on PCI Express (that have been successfully propagated to the primary interface of the port) are sent to the IIO core error logic (for further escalation) regardless of the setting of the equivalent bit in the ROOTCTRL register. When clear, the correctable errors are only propagated to the IIO core error logic if the equivalent bit in "ROOTCON: PCI Express Root Control" register is set. For Dev#0 in DMI mode and Dev#3/Fn#0, unless this bit is set, DMI/NTB link related correctable errors will never be notified to system software.
32	RW	0b	ACPI PME Interrupt Enable When set, Assert/Deassert_PMEGPE messages are enabled to be generated when ACPI mode is enabled for handling PME messages from PCI Express. When this bit is cleared (from a 1), a Deassert_PMEGPE message is scheduled on behalf of the root port if an Assert_PMEGPE message was sent last from the root port. When NTB is enabled on Dev#3/Fn#0 this bit is meaningless because PME messages are not expected to be received on the NTB link.
31	RW	0b	Disable L0s on transmitter When set, IIO never puts its tx in L0s state, even if OS enables it via the Link Control register.
29	RW	1b	cfg_to_en Disables/enables config timeouts, independently of other timeouts.
28	RW	0b	to_dis Disables timeouts completely.
27	RWS	0b	System Interrupt Only on Link BW/Management Status This bit, when set, will disable generating MSI and Intx interrupts on link bandwidth (speed and/or width) and management changes, even if MSI or INTx is enabled i.e. will disable generating MSI or INTx when LNKSTS bits 15 and 14 are set. Whether or not this condition results in a system event like SMI/PMI/CPEI is dependent on whether this event masked or not in the XPCORERRMSK register. Note that when Dev#3 is operation in NTB mode, this bit still applies and BIOS needs to do the needful if it wants to enable/disable these events from generating MSI/INTx interrupts from the NTB device.



MISCTRLSTS Bus: 0 Device: 3Function: 0Offset: 188			
Bit	Attr	Default	Description
26	RW-LV	0b	EOI Forwarding Disable - Disable EOI broadcast to this PCIe link When set, EOI message will not be broadcast down this PCIe link. When clear, the port is a valid target for EOI broadcast. BIOS must set this bit on a port if it is connected to a another cpu NTB or root port on other end of the link.
25	RW	0b	Peer2peer Memory Write Disable When set, peer2peer memory writes are master aborted otherwise they are allowed to progress per the peer2peer decoding rules.
24	RW	0b	Peer2peer Memory Read Disable When set, peer2peer memory reads are master aborted otherwise they are allowed to progress per the peer2peer decoding rules.
23	RW	0b	Phold Disable Applies only to Dev#0When set, the IIO responds with Unsupported request on receiving assert_phold message from ICH and results in generating a fatal error.
22	RWS	0b	check_cpl_tc
21	RW-O	0b	Force Outbound TC to Zero Forces the TC field to zero for outbound requests. 1: TC is forced to zero on all outbound transactions regardless of the source TC value 0: TC is not altered Note: In DMI mode, TC is always forced to zero and this bit has no effect.
20:19	RV	0h	Reserved
18	RWS	0b	Max Read Completion Combine Size This bit when set, will enable completion combining to a maximum of 256B (values less than or equal to 256B allowed). When clear, the maximum read completion combining size is 128B (values less than or equal to 256B allowed).
17	RO	0b	Force Data Parity Error
16	RO	0b	Force EP Bit Error
15	RWS	0b	dis_hdr_storage
14	RWS	0b	allow_one_np_os
13	RWS	0b	tlp_on_any_lane
12	RWS	1b	disable_ob_parity_check
11:10	RV	0h	Reserved
9	RWS	0b	dispdspolling Disables gen2 if timeout happens in polling.cfg.
8:7	RW	0b	PME2ACKTOCTRL
6	RW	0b	Enable timeout for receiving PME_TO_ACK When set, IIO enables the timeout to receiving the PME_TO_ACK
5	RW	0b	Send PME_TURN_OFF message When this bit is written with a 1b, IIO sends a PME_TURN_OFF message to the PCIe link. Hardware clears this bit when the message has been sent on the link.



MISCCTRLSTS			
Bus: 0 Device: 3Function: 0Offset: 188			
Bit	Attr	Default	Description
4	RW	0b	<p>Enable System Error only for AER</p> <p>Applies only to root/NTB ports. For Dev#0 in DMI mode, this bit is to be left at default value always. When this bit is set, the PCI Express errors do not trigger an MSI or Intx interrupt, regardless of the whether MSI or INTx is enabled or not. Whether or not PCI Express errors result in a system event like NMI/SMI/PMI/CPEI is dependent on whether the appropriate system error or override system error enable bits are set or not.</p> <p>When this bit is clear, PCI Express errors are reported via MSI or INTx and/or NMI/SMI/MCA/CPEI. When this bit is clear and if MSI enable bit in the Section 8.12.5.22, "MSICTRL: MSI Control" on page 490 is set (clear), then an MSI (INTx) interrupt is generated for PCI Express errors. When this bit is clear, and 'System Error on Fatal Error Enable' bit in ROOTCON register is set, then NMI/SMI/MCA is (also) generated for a PCI Express fatal error. Similar behavior for non-fatal and corrected errors.</p> <p>Note that this bit applies to Dev#3/Fn#0 in NTB mode as well and BIOS needs to set it up appropriately in that mode.</p>
3	RW	0b	<p>Enable ACPI mode for Hotplug</p> <p>Applies only to root ports. For Dev#0 in DMI mode, this bit is to be left at default value always. When this bit is set, all HP events from the PCI Express port are handled via _HPGPE messages to the PCH and no MSI/INTx messages are ever generated for HP events (regardless of whether MSI or INTx is enabled at the root port or not) at the root port. When this bit is clear, _HPGPE message generation on behalf of root port HP events is disabled and OS can chose to generate MSI or INTx interrupt for HP events, by setting the MSI enable bit in root ports. This bit does not apply to the DMI ports.</p> <p>Refer to PCI Express Base Specification, Revision 2.0 'PCI Express Hot Plug Interrupts,' for details of MSI and GPE message generation for hot-plug events.</p> <p>Clearing this bit (from being 1) schedules a Deassert_HPGPE event on behalf of the root port, provided there was any previous Assert_HPGPE message that was sent without an associated Deassert message.</p> <p>Note that this bit applies to Dev#3/Fn#0 in NTB mode as well and BIOS needs to set it up appropriately in that mode.</p>
2	RW	0b	<p>Enable ACPI mode for PM</p> <p>Applies only to root ports. For Dev#0 in DMI mode, this bit is to be left at default value always. When this bit is set, all PM events at the PCI Express port are handled via _PMEGPE messages to the PCH, and no MSI interrupts are ever generated for PM events at the root port (regardless of whether MSI is enabled at the root port or not). When clear, _PMEGPE message generation for PM events is disabled and OS can chose to generate MSI interrupts for delivering PM events by setting the MSI enable bit in root ports. This bit does not apply to the DMI ports.</p> <p>Refer to PCI Express Base Specification, Revision 2.0 'Power Management,' for details of MSI and GPE</p> <p>Clearing this bit (from being 1) schedules a Deassert_PMEGPE event on behalf of the root port, provided there was any previous Assert_PMEGPE message that was sent without an associated Deassert message.</p> <p>Note that this bit applies to Dev#3/Fn#0 in NTB mode as well and BIOS needs to set it up appropriately in that mode.</p>
0	RV	0h	Reserved

8.12.3.51 PCIE_IOU_BIF_CTRL: PCIe IOU Bifurcation Control

PCIE_IOU_BIF_CTRL			
Bus: 0 Device: 3Function: 0Offset: 190			
Bit	Attr	Default	Description
15:4	RV	0h	Reserved



PCIE_I0U_BIF_CTRL Bus: 0 Device: 3Function: 0Offset: 190			
Bit	Attr	Default	Description
3	WO	0b	<p>IOU Start Bifurcation</p> <p>When software writes a 1 to this bit, IIO starts the port 0 bifurcation process. After writing to this bit, software can poll the Data Link Layer link active bit in the LNKSTS register to determine if a port is up and running. Once a port bifurcation has been initiated by writing a 1 to this bit, software cannot initiate any more write-1 to this bit (write of 0 is ok).</p> <p>Notes: That this bit can be written to a 1 in the same write that changes values for bits 2:0 in this register and in that case, the new value from the write to bits 2:0 take effect. This bit always reads a 0b.</p>
2:0	RWS	100b	<p>IOU Bifurcation Control</p> <p>To select a IOU bifurcation, software sets this field and then either</p> <ul style="list-style-type: none"> a) sets bit 3 in this register to initiate training OR b) resets the entire CPU and on exit from that reset, CPU will bifurcate the ports per the setting in this field. <p>For Device 1 Function 0:</p> <ul style="list-style-type: none"> 000: x4x4 (operate lanes 7:4 as x4, 3:0 as x4) 001: x8 others: Reserved <p>For Device 2 Function 0:</p> <ul style="list-style-type: none"> 000: x4x4x4x4 (operate lanes 15:12 as x4, 11:8 as x4, 7:4 as x4 and 3:0 as x4) 001: x4x4x8 (operate lanes 15:12 as x4, 11:8 as x4 and 7:0 as x8) 010: x8x4x4 (operate lanes 15:8 as x8, 7:4 as x4 and 3:0 as x4) 011: x8x8 (operate lanes 15:8 as x8, 7:0 as x8) 100: x16 others: Reserved

8.12.3.52 NTBDEVCAP: PCI Express Device Capabilities

The PCI Express Device Capabilities register identifies device specific information for the device.

NTBDEVCAP Bus: 0 Device: 3Function: 0Offset: 194h			
Bit	Attr	Default	Description
31:29	RV	0h	Reserved
28	RO	0b	<p>Function Level Reset Capability</p> <p>A value of 1b indicates the Function supports the optional Function Level Reset mechanism. NTB does not support this functionality.</p>
27:26	RO	0h	<p>Captured Slot Power Limit Scale</p> <p>Does not apply to RPs or integrated devices This value is hardwired to 00h NTB is required to be able to receive the Set_Slot_Power_Limit message without error but simply discard the Message value.</p> <p>Note: PCI Express Base Specification, Revision 2.0 states Components with Endpoint, Switch, or PCI Express-PCI Bridge Functions that are targeted for integration on an adapter where total consumed power is below the lowest limit defined for the targeted form factor are permitted to ignore Set_Slot_Power_Limit Messages, and to return a value of 0 in the Captured Slot Power Limit Value and Scale fields of the Device Capabilities register.</p>



NTBDEVCAP Bus: 0 Device: 3Function: 0Offset: 194h			
Bit	Attr	Default	Description
25:18	RO	00h	<p>Captured Slot Power Limit Value Does not apply to RPs or integrated devices This value is hardwired to 00h NTB is required to be able to receive the Set_Slot_Power_Limit message without error but simply discard the Message value.</p> <p>Note: PCI Express Base Specification, Revision 2.0 states Components with Endpoint, Switch, or PCI Express-PCI Bridge Functions that are targeted for integration on an adapter where total consumed power is below the lowest limit defined for the targeted form factor are permitted to ignore Set_Slot_Power_Limit Messages, and to return a value of 0 in the Captured Slot Power Limit Value and Scale fields of the Device Capabilities register.</p>
17:16	RV	0h	Reserved
15	RO	1b	<p>Role Based Error Reporting IIO is 1.1 compliant and so supports this feature</p>
14	RO	0b	<p>Power Indicator Present on Device Does not apply to RPs or integrated devices</p>
13	RO	0b	<p>Attention Indicator Present Does not apply to RPs or integrated devices</p>
12	RO	0b	<p>Attention Button Present Does not apply to RPs or integrated devices</p>
11:9	RW-O	110b	<p>Endpoint L1 Acceptable Latency This field indicates the acceptable latency that an Endpoint can withstand due to the transition from L1 state to the L0 state. It is essentially an indirect measure of the Endpoint's internal buffering. Power management software uses the reported L1 Acceptable Latency number to compare against the L1 Exit Latencies reported (see below) by all components comprising the data path from this Endpoint to the Root Complex Root Port to determine whether ASPM L1 entry can be used with no loss of performance.</p> <p>Defined encodings are: 000: Maximum of 1 us 001: Maximum of 2 us 010: Maximum of 4 us 011: Maximum of 8 us 100: Maximum of 16 us 101: Maximum of 32 us 110: Maximum of 64 us 111: No limit</p> <p>Notes: BIOS programs this value</p>
8:6	RW-O	000b	<p>Endpoint L0s Acceptable Latency This field indicates the acceptable total latency that an Endpoint can withstand due to the transition from L0s state to the L0 state. It is essentially an indirect measure of the Endpoint's internal buffering. Power management software uses the reported L0s Acceptable Latency number to compare against the L0s exit latencies reported by all components comprising the data path from this Endpoint to the Root Complex Root Port to determine whether ASPM L0s entry can be used with no loss of performance.</p> <p>Defined encodings are: 000: Maximum of 64 ns 001: Maximum of 128 ns 010: Maximum of 256 ns 011: Maximum of 512 ns 100: Maximum of 1 us 101: Maximum of 2 us 110: Maximum of 4 us 111: No limit</p> <p>Note: BIOS programs this value</p>



NTBDEVCAP Bus: 0 Device: 3Function: 0Offset: 194h			
Bit	Attr	Default	Description
5	RO	1b	Extended Tag Field Supported IIO devices support 8-bit tag1 = Maximum Tag field is 8 bits 0 = Maximum Tag field is 5 bits
4:3	RO	00b	Phantom Functions Supported IIO does not support phantom functions.00b = No Function Number bits are used for Phantom Functions
2:0	RO	001b	Max Payload Size Supported IIO supports 256B payloads on PCI Express ports001b = 256 bytes max payload size

8.12.3.53 LNKCAP: PCI Express Link Capabilities

The Link Capabilities register identifies the PCI Express specific link capabilities. The link capabilities register needs some default values setup by the local host. This register is relocated to the enhanced configuration space region in while in NTB mode.

LNKCAP Bus: 0 Device: 3Function: 0Offset: 19Ch			
Bit	Attr	Default	Description
31:24	RW-O	00h	Port Number This field indicates the PCI Express port number for the link and is initialized by software/BIOS.NOTE: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB.
23:22	RV	0h	Reserved
21	RO	1b	Link Bandwidth Notification Capability A value of 1b indicates support for the Link Bandwidth Notification status and interrupt mechanisms.
20	RO	1b	Data Link Layer Link Active Reporting Capable IIO supports reporting status of the data link layer so software knows when it can enumerate a device on the link or otherwise know the status of the link.
19	RO	0b	Surprise Down Error Reporting Capable IIO supports reporting a surprise down error condition
18	RO	0b	Clock Power Management Does not apply to CPU
17:15	RW-O	010b	L1 Exit Latency This field indicates the L1 exit latency for the given PCI Express port. It indicates the length of time this port requires to complete transition from L1 to L0. 000: Less than 1 us 001: 1 us to less than 2 us 010: 2 us to less than 4 us 011: 4 us to less than 8 us 100: 8 us to less than 16 us 101: 16 us to less than 32 us 110: 32 us to 64 us 111: More than 64 us Notes: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB.



LNKCAP Bus: 0 Device: 3Function: 0Offset: 19Ch			
Bit	Attr	Default	Description
14:12	RW-O	011b	<p>L0s Exit Latency This field indicates the L0s exit latency (i.e L0s to L0) for the PCI Express port.000: Less than 64 ns 001: 64 ns to less than 128 ns 010: 128 ns to less than 256 ns 011: 256 ns to less than 512 ns 100: 512 ns to less than 1 us 101: 1 us to less than 2 us 110: 2 us to 4 us 111: More than 4 us</p> <p>Note: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB.</p>
11:10	RW-O	11b	<p>Active State Link PM Support This field indicates the level of active state power management supported on the given PCI Express port.00: Disabled 01: L0s Entry Supported 10: Reserved 11: L0s and L1 Supported</p> <p>Note: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB.</p>
9:4	RW-O	4h	<p>Maximum Link Width This field indicates the maximum width of the given PCI Express Link attached to the port.000001: x1 000010: x2 000100: x4 001000: x8 010000: x16 Others - Reserved</p> <p>Note: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB.</p>
3:0	RW-O	0011b	<p>Maximum Link Speed This field indicates the maximum link speed of this Port. The encoding is the binary value of the bit location in the Supported Link Speeds Vector (in LNKCAP2) that corresponds to the maximum link speed. cpu supports a maximum of 8Gbps, unless restricted by the Gen3_OFF fuse. If Gen3_OFF fuse is '1', this field defaults to 0010b (5 Gbps) If Gen3_OFF fuse is '0' this field defaults to 0011b (8 Gbps)</p>

8.12.3.54 LNKCON: PCI Express Link Control

The PCI Express Link Control register controls the PCI Express Link specific parameters. The link control register needs some default values setup by the local host. This register is relocated to the enhanced configuration space region in while in NTB mode. In NTB/RP mode RP will program this register. In NTB/NTB mode local host BIOS will program this register

LNKCON Bus: 0 Device: 3Function: 0Offset: 1A0h			
Bit	Attr	Default	Description
15:12	RV	0h	Reserved



LNKCON Bus: 0 Device: 3Function: 0Offset: 1A0h			
Bit	Attr	Default	Description
11	RW	0b	Link Autonomous Bandwidth Interrupt Enable For root ports, when set to 1b this bit enables the generation of an interrupt to indicate that the Link Autonomous Bandwidth Status bit has been set. For DMI mode on Dev#0, interrupt is not supported and hence this bit is not useful. Expectation is that BIOS will set bit 27 in Section 8.2.84 to notify the system of autonomous BW change event on that port.
10	RW	0b	Link Bandwidth Management Interrupt Enable For root ports, when set to 1b this bit enables the generation of an interrupt to indicate that the Link Bandwidth Management Status bit has been set. For DMI mode on Dev#0, interrupt is not supported and hence this bit is not useful. Expectation is that BIOS will set bit 27 in Section 11.2.84 to notify the system of autonomous BW change event on that port.
9	RW	0b	Hardware Autonomous Width Disable When Set, this bit disables hardware from changing the Link width for reasons other than attempting to correct unreliable Link operation by reducing Link width. Note that IIO does not by itself change width for any reason other than reliability. So this bit only disables such a width change as initiated by the device on the other end of the link.
8	RO	0b	Enable Clock Power Management N/A to CPU
7	RW	0b	Extended Synch This bit when set forces the transmission of additional ordered sets when exiting L0s and when in recovery. See PCI Express Base Specification, Revision 2.0 for details.
6	RW	0b	Common Clock Configuration IIO does nothing with this bit
5	WO	0b	Retrain Link A write of 1 to this bit initiates link retraining in the given PCI Express/DMI port by directing the LTSSM to the recovery state if the current state is [L0, L0s or L1]. If the current state is anything other than L0, L0s, L1 then a write to this bit does nothing. This bit always returns 0 when read. It is permitted to write 1b to this bit while simultaneously writing modified values to other fields in this register. If the LTSSM is not already in Recovery or Configuration, the resulting Link training must use the modified values. If the LTSSM is already in Recovery or Configuration, the modified values are not required to affect the Link training that's already in progress.
4	RW	0b	Link Disable This field controls whether the link associated with the PCI Express/DMI port is enabled or disabled. When this bit is a 1, a previously configured link would return to the 'disabled' state as defined in the PCI Express Base Specification, Revision 2.0. When this bit is clear, an LTSSM in the 'disabled' state goes back to the detect state. 0: Enables the link associated with the PCI Express port 1: Disables the link associated with the PCI Express port
3	RO	0b	Read Completion Boundary Set to zero to indicate IIO could return read completions at 64B boundaries
2	RV	0h	Reserved
1:0	RW-V	00b	Active State Link PM Control When 01b or 11b, L0s on transmitter is enabled, otherwise it is disabled. 10 and 11 enables L1 ASPM.

8.12.3.55 LNKSTS: PCI Express Link Status Register

The PCI Express Link Status register provides information on the status of the PCI Express Link such as negotiated width, training etc. The link status register needs some default values setup by the local host. This register is relocated to the enhanced configuration space region in while in NTB mode.



LNKSTS Bus: 0 Device: 3Function: 0Offset: 1A2h			
Bit	Attr	Default	Description
15	RW1C	0b	<p>Link Autonomous Bandwidth Status</p> <p>This bit is set to 1b by hardware to indicate that hardware has autonomously changed link speed or width, without the port transitioning through DL_Down status, for reasons other than to attempt to correct unreliable link operation. IIO does not, on its own, change speed or width autonomously for non-reliability reasons. IIO only sets this bit when it receives a width or speed change indication from downstream component that is not for link reliability reasons.</p>
14	RW1C	0b	<p>Link Bandwidth Management Status</p> <p>This bit is set to 1b by hardware to indicate that either of the following has occurred without the port transitioning through DL_Down status: a) A link retraining initiated by a write of 1b to the Retrain Link bit has completed b) Hardware has autonomously changed link speed or width to attempt to correct unreliable link operation</p> <p>Note IIO also sets this bit when it receives a width or speed change indication from downstream component that is for link reliability reasons.</p>
13	RO	0b	<p>Data Link Layer Link Active</p> <p>Set to 1b when the Data Link Control and Management State Machine is in the DL_Active state, 0b otherwise. On a downstream port or upstream port, when this bit is 0b, the transaction layer associated with the link will abort all transactions that would otherwise be routed to that link.</p>
12	RW-O	1b	<p>Slot Clock Configuration</p> <p>This bit indicates whether IIO receives clock from the same xtal that also provides clock to the device on the other end of the link. 1: indicates that same xtal provides clocks to devices on both ends of the link 0: indicates that different xtals provide clocks to devices on both ends of the link</p> <p>Note: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB.</p>
11	RO	0b	<p>Link Training</p> <p>This field indicates the status of an ongoing link training session in the PCI Express port0: LTSSM has exited the recovery/configuration state 1: LTSSM is in recovery/configuration state or the Retrain Link was set but training has not yet begun.</p> <p>The IIO hardware clears this bit once LTSSM has exited the recovery/configuration state. Refer to PCI Express Base Specification, Revision 2.0 for details of which states within the LTSSM would set this bit and which states would clear this bit.</p>
10	RO	0b	Reserved
9:4	RO	00h	<p>Negotiated Link Width</p> <p>This field indicates the negotiated width of the given PCI Express link after training is completed. Only x1, x2, x4, x8 and x16 link width negotiations are possible in IIO. A value of 0x01 in this field corresponds to a link width of x1, 0x02 indicates a link width of x2 and so on, with a value of 0x10 for a link width of x16. The value in this field is reserved and could show any value when the link is not up. Software determines if the link is up or not by reading bit 13 of this register.</p>
3:0	RO-V	1h	<p>Current Link Speed</p> <p>This field indicates the negotiated Link speed of the given PCI Express Link.</p> <p>0001: 2.5 Gbps 0010: 5 Gbps 0011: 8 Gbps (cpu will never set this value when Gen3_OFF fuse is blown) Others: Reserved</p> <p>The value in this field is not defined when the link is not up. Software determines if the link is up or not by reading bit 13 of this register.</p>

8.12.3.56 SLTCAP: PCI Express Slot Capabilities

The Slot Capabilities register identifies the PCI Express specific slot capabilities.



SLTCAP Bus: 0 Device: 3Function: 0Offset: 1A4h			
Bit	Attr	Default	Description
31:19	RW-O	0h	Physical Slot Number This field indicates the physical slot number of the slot connected to the PCI Express port and is initialized by BIOS.
18	RO	0h	Command Complete Not Capable IIO is capable of command complete interrupt.
17	RW-O	0h	Electromechanical Interlock Present This bit when set indicates that an Electromechanical Interlock is implemented on the chassis for this slot and that lock is controlled by bit 11 in Slot Control register. BIOS note: this capability is not set if the Electromechanical Interlock control is connected to main slot power control.
16:15	RW-O	0h	Slot Power Limit Scale This field specifies the scale used for the Slot Power Limit Value and is initialized by BIOS. IIO uses this field when it sends a Set_Slot_Power_Limit message on PCI Express. Range of Values: 00: 1.0x 01: 0.1x 10: 0.01x 11: 0.001x
14:7	RW-O	00h	Slot Power Limit Value This field specifies the upper limit on power supplied by slot in conjunction with the Slot Power Limit Scale value defined previously. Power limit (in Watts) = SPLS x SPLV. This field is initialized by BIOS. IIO uses this field when it sends a Set_Slot_Power_Limit message on PCI Express. Design note: IIO can chose to send the Set_Slot_Power_Limit message on the link at first link up condition without regards to whether this register and the Slot Power Limit Scale register are programmed yet by BIOS. IIO must then be designed to discard a received Set_Slot_Power_Limit message without an error.
6	RW-O	0h	Hot-plug Capable This field defines hot-plug support capabilities for the PCI Express port. 0: indicates that this slot is not capable of supporting Hot-plug operations. 1: indicates that this slot is capable of supporting Hot-plug operations This bit is programed by BIOS based on the system design. This bit must be programmed by BIOS to be consistent with the VPP enable bit for the port.
5	RW-O	0h	Hot-plug Surprise This field indicates that a device in this slot may be removed from the system without prior notification (like for instance a PCI Express cable). 0: indicates that hot-plug surprise is not supported 1: indicates that hot-plug surprise is supported Note that if platform implemented cable solution (either direct or via a SIOM with repeater), on a port, then this could be set. BIOS programs this field with a 0 for CEM/SIOM FFs. This bit is used by IIO hardware to determine if a transition from DL_active to DL_Inactive is to be treated as a surprise down error or not. If a port is associated with a hot pluggable slot and the hotplug surprise bit is set, then any transition to DL_Inactive is not considered an error. Refer to PCI Express Base Specification, Revision 2.0 for further details.
4	RW-O	0h	Power Indicator Present This bit indicates that a Power Indicator is implemented for this slot and is electrically controlled by the chassis. 0: indicates that a Power Indicator that is electrically controlled by the chassis is not present 1: indicates that Power Indicator that is electrically controlled by the chassis is present BIOS programs this field with a 1 for CEM/SIOM FFs and a 0 for Express cable.



SLTCAP Bus: 0 Device: 3Function: 0Offset: 1A4h			
Bit	Attr	Default	Description
3	RW-O	0h	<p>Attention Indicator Present</p> <p>This bit indicates that an Attention Indicator is implemented for this slot and is electrically controlled by the chassis</p> <p>0: indicates that an Attention Indicator that is electrically controlled by the chassis is not present</p> <p>1: indicates that an Attention Indicator that is electrically controlled by the chassis is present</p> <p>BIOS programs this field with a 1 for CEM/SIOM FFs.</p>
2	RW-O	0h	<p>MRL Sensor Present</p> <p>This bit indicates that an MRL Sensor is implemented on the chassis for this slot.</p> <p>0: indicates that an MRL Sensor is not present</p> <p>1: indicates that an MRL Sensor is present</p> <p>BIOS programs this field with a 0 for SIOM/Express cable and with either 0 or 1 for CEM depending on system design.</p>
1	RW-O	0h	<p>Power Controller Present</p> <p>This bit indicates that a software controllable power controller is implemented on the chassis for this slot.</p> <p>0: indicates that a software controllable power controller is not present</p> <p>1: indicates that a software controllable power controller is present</p> <p>BIOS programs this field with a 1 for CEM/SIOM FFs and a 0 for Express cable.</p>
0	RW-O	0h	<p>Attention Button Present</p> <p>This bit indicates that the Attention Button event signal is routed (from slot or on-board in the chassis) to the IIO's hotplug controller.</p> <p>0: indicates that an Attention Button signal is routed to IIO</p> <p>1: indicates that an Attention Button is not routed to IIO</p> <p>BIOS programs this field with a 1 for CEM/SIOM FFs.</p>

8.12.3.57 SLTCON: PCI Express Slot Control

The Slot Control register identifies the PCI Express specific slot control parameters for operations such as Hot-plug and Power Management.

Warning: Warning: Any write to this register will set the Command Completed bit in the SLTSTS register, ONLY if the VPP enable bit for the port is set. If the port's VPP enable bit is set (that is, hot-plug for that slot is enabled), then the required actions on VPP are completed before the Command Completed bit is set in the SLTSTS register. If the VPP enable bit for the port is clear, then the write simply updates this register (see individual bit definitions for details) but the Command Completed bit in the SLTSTS register is not set.

SLTCON Bus: 0 Device: 3Function: 0Offset: 1A8h			
Bit	Attr	Default	Description
15:13	RV	0h	Reserved
12	RWS	0b	<p>Data Link Layer State Changed Enable</p> <p>When set to 1, this field enables software notification when Data Link Layer Link Active field is changed</p>
11	RW	0b	<p>Electromechanical Interlock Control</p> <p>When software writes either a 1 to this bit, IIO pulses the EMIL pin per; PCI Express Server/Workstation Module Electromechanical Spec Rev 1.0. Write of 0 has no effect. This bit always returns a 0 when read. If electromechanical lock is not implemented, then either a write of 1 or 0 to this register has no effect.</p>



SLTCON Bus: 0 Device: 3Function: 0Offset: 1A8h			
Bit	Attr	Default	Description
10	RWS	1b	<p>Power Controller Control</p> <p>if a power controller is implemented, when written sets the power state of the slot per the defined encodings. Reads of this field must reflect the value from the latest write, even if the corresponding hot-plug command is not executed yet at the VPP, unless software issues a write without waiting for the previous command to complete in which case the read value is undefined.</p> <p>0: Power On 1: Power Off</p>
9:8	RW	3h	<p>Power Indicator Control</p> <p>If a Power Indicator is implemented, writes to this register set the Power Indicator to the written state. Reads of this field must reflect the value from the latest write, even if the corresponding hot-plug command is not executed yet at the VPP, unless software issues a write without waiting for the previous command to complete in which case the read value is undefined.</p> <p>00: Reserved. 01: On 10: Blink (IIO drives 1.5 Hz square wave for Chassis mounted LEDs) 11: Off</p> <p>When this register is written, the event is signaled via the virtual pins of the IIO over a dedicated SMBus port.</p> <p>IIO does not generated the Power_Indicator_On/Off/Blink messages on PCI Express when this field is written to by software.</p>
7:6	RW	3h	<p>Attention Indicator Control</p> <p>If an Attention Indicator is implemented, writes to this register set the Attention Indicator to the written state. Reads of this field reflect the value from the latest write, even if the corresponding hot-plug command is not executed yet at the VPP, unless software issues a write without waiting for the previous command to complete in which case the read value is undefined.</p> <p>00: Reserved. 01: On 10: Blink (The IIO drives 1.5 Hz square wave) 11: Off</p> <p>When this register is written, the event is signaled via the virtual pins of the IIO over a dedicated SMBus port.</p> <p>IIO does not generated the Attention_Indicator_On/Off/Blink messages on PCI Express when this field is written to by software.</p>
5	RW	0h	<p>Hot-plug Interrupt Enable</p> <p>When set to 1b, this bit enables generation of Hot-Plug MSI interrupt (and not wake event) on enabled Hot-Plug events, provided ACPI mode for hotplug is disabled.</p> <p>0: disables interrupt generation on Hot-plug events 1: enables interrupt generation on Hot-plug events</p>
4	RW	0h	<p>Command Completed Interrupt Enable</p> <p>This field enables the generation of Hot-plug interrupts (and not wake event) when a command is completed by the Hot-plug controller connected to the PCI Express port</p> <p>0: disables hot-plug interrupts on a command completion by a hot-plug Controller 1: Enables hot-plug interrupts on a command completion by a hot-plug Controller</p>
3	RW	0h	<p>Presence Detect Changed Enable</p> <p>This bit enables the generation of hot-plug interrupts or wake messages via a presence detect changed event.</p> <p>0: disables generation of hot-plug interrupts or wake messages when a presence detect changed event happens. 1- Enables generation of hot-plug interrupts or wake messages when a presence detect changed event happens.</p>



SLTCON Bus: 0 Device: 3Function: 0Offset: 1A8h			
Bit	Attr	Default	Description
2	RW	0h	MRL Sensor Changed Enable This bit enables the generation of hot-plug interrupts or wake messages via a MRL Sensor changed event. 0: disables generation of hot-plug interrupts or wake messages when an MRL Sensor changed event happens. 1: Enables generation of hot-plug interrupts or wake messages when an MRL Sensor changed event happens.
1	RW	0h	Power Fault Detected Enable This bit enables the generation of hot-plug interrupts or wake messages via a power fault event. 0: disables generation of hot-plug interrupts or wake messages when a power fault event happens. 1: Enables generation of hot-plug interrupts or wake messages when a power fault event happens.
0	RW	0h	Attention Button Pressed Enable This bit enables the generation of hot-plug interrupts or wake messages via an attention button pressed event. 0: disables generation of hot-plug interrupts or wake messages when the attention button is pressed. 1: Enables generation of hot-plug interrupts or wake messages when the attention button is pressed.

8.12.3.58 SLTSTS: PCI Express Slot Status Register

The PCI Express Slot Status register defines important status information for operations such as Hot-plug and Power Management.

SLTSTS Bus: 0 Device: 3Function: 0Offset: 1AAh			
Bit	Attr	Default	Description
15:9	RV	0h	Reserved
8	RW1C	0h	Data Link Layer State Changed This bit is set (if it is not already set) when the state of the Data Link Layer Link Active bit in the Link Status register changes. Software must read Data Link Layer Active field to determine the link state before initiating configuration cycles to the hot-plugged device.
7	RO	0h	Electromechanical Latch Status When read this register returns the current state of the Electromechanical Interlock (the EMILS pin) which has the defined encodings as: 0b Electromechanical Interlock Disengaged 1b Electromechanical Interlock Engaged
6	RO	0h	Presence Detect State For ports with slots (where the Slot Implemented bit of the PCI Express Capabilities Registers is 1b), this field is the logical OR of the Presence Detect status determined via an in-band mechanism and sideband Present Detect pins. Refer to how PCI Express Base Specification, Revision 2.0 for how the inband presence detect mechanism works (certain states in the LTSSM constitute 'card present' and others don't). 0: Card/Module/Cable slot empty or Cable Slot occupied but not powered 1: Card/module Present in slot (powered or unpowered) or cable present and powered on other end For ports with no slots, IIO hardwires this bit to 1b. Note: OS could get confused when it sees an empty PCI Express RP i.e. 'no slots + no presence', since this is now disallowed in the spec. So BIOS must hide all unused RPs devices in IIO config space, via the DEVHIDE register in Intel QPI Configuration Register space.



SLTSTS Bus: 0 Device: 3Function: 0Offset: 1AAh			
Bit	Attr	Default	Description
5	RO	0h	MRL Sensor State This bit reports the status of an MRL sensor if it is implemented. 0: MRL Closed 1: MRL Open
4	RW1C	0h	Command Completed This bit is set by the IIO when the hot-plug command has completed and the hot-plug controller is ready to accept a subsequent command. It is subsequently cleared by software after the field has been read and processed. This bit provides no guarantee that the action corresponding to the command is complete.
3	RW1C	0h	Presence Detect Changed This bit is set by the IIO when a Presence Detect Changed event is detected. It is subsequently cleared by software after the field has been read and processed. On-board logic per slot must set the VPP signal corresponding this bit inactive if the FF/system does not support out-of-band presence detect.
2	RW1C	0h	MRL Sensor Changed This bit is set by the IIO when an MRL Sensor Changed event is detected. It is subsequently cleared by software after the field has been read and processed. On-board logic per slot must set the VPP signal corresponding this bit inactive if the FF/system does not support MRL.
1	RW1C	0h	Power Fault Detected This bit is set by the IIO when a power fault event is detected by the power controller. It is subsequently cleared by software after the field has been read and processed. On-board logic per slot must set the VPP signal corresponding this bit inactive if the FF/system does not support power fault detection.
0	RW1C	0h	Attention Button Pressed This bit is set by the IIO when the attention button is pressed. It is subsequently cleared by software after the field has been read and processed. On-board logic per slot must set the VPP signal corresponding this bit inactive if the FF/system does not support attention button. IIO silently discards the Attention_Button_Pressed message if received from PCI Express link without updating this bit.

8.12.3.59 ROOTCON: PCI Express Root Control

Device 3, Function 0, Offset **1ACh**. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.51](#). **Notice the offset differences.**

8.12.3.60 ROOTCAP: PCI Express Root Capabilities

Device 3, Function 0, Offset **1AEh**. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.52](#). **Notice the offset differences.**

8.12.3.61 ROOTSTS: PCI Express Root Status


Device 3, Function 0, Offset **1B0h**. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.53](#). **Notice the offset differences.**

8.12.3.62 DEVCAP2: PCI Express Device Capabilities Register

Device 3, Function 0, Offset **1B4h**. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.54](#). **Notice the offset differences.**

8.12.3.63 DEVCAP2: PCI Express Device Capabilities Register

Device 3, Function 0, Offset **1B8h**. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.55](#). **Notice the offset differences.**



8.12.3.64 DEVCTRL2: PCI Express Device Control 2 Register

DEVCTRL2 Bus: 0 Device: 3Function: 0Offset: 1B8h			
Bit	Attr	Default	Description
15:6	RV	0h	Reserved
5	RW	0b	Alternative RID Interpretation Enable When set to 1b, ARI is enabled for the NTB EP. Note: Normally, The 5-bit Device ID is required to be zero in the RID that consists of BDF, but when ARI is enabled, the 8-bit DF is now interpreted as an 8-bit Function Number with the Device Number equal to zero implied.
4	RW-V	0b	Completion Timeout Disable When set to 1b, this bit disables the Completion Timeout mechanism for all NP tx that IIO issues on the PCIe/DMI link and in the case of CB DMA, for all NP tx that DMA issues upstream. When 0b, completion timeout is enabled. Software can change this field while there is active traffic in the RP.
3:0	RW-V	0h	Completion Timeout Value on NP Tx that IIO issues on PCIe In Devices that support Completion Timeout programmability, this field allows system software to modify the Completion Timeout range. The following encodings and corresponding timeout ranges are defined: 0000b = 10ms to 50ms 0001b = Reserved (IIO aliases to 0000b) 0010b = Reserved (IIO aliases to 0000b) 0101b = 16 ms to 55 ms 0110b = 65 ms to 210 ms 1001b = 260 ms to 900 ms 1010b = 1 s to 3.5 s 1101b = 4 s to 13 s 1110b = 17 s to 64 s When software selects 17s to 64s range, Section 11.2.92 further controls the timeout value within that range. For all other ranges selected by OS, the timeout value within that range is fixed in IIO hardware. Software can change this field while there is active traffic in the root port. This value will also be used to control PME_TO_ACK Timeout. That is this field sets the timeout value for receiving a PME_TO_ACK message after a PME_TURN_OFF message has been transmitted. The PME_TO_ACK Timeout has meaning only if bit 6 of MISCCTRLSTS register is set to a 1b.

8.12.3.65 LNKCAP2: PCI Express Link Capabilities 2 Register

Device 3, Function 0, Offset 1BCh. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.56](#). **Notice the offset differences.**

8.12.3.66 LNKCON2: PCI Express Link Control 2 Register

Device 3, Function 0, Offset 1C0h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.57](#). **Notice the offset differences.**

8.12.3.67 LNKSTS2: PCI Express Link Status Register 2

Device 3, Function 0, Offset **1C2h**. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.58](#). **Notice the offset differences.**

8.12.3.68 ERRINJCAP: PCI Express Error Injection Capability

Device 3, Function 0, Offset 1D0h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.89](#).



8.12.3.69 ERRINJHDR: PCI Express Error Injection Capability Header

Device 3, Function 0, Offset D4h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.90](#).

8.12.3.70 ERRINJCON: PCI Express Error Injection Control Register

Device 3, Function 0, Offset 1D8h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.91](#).

8.12.3.71 CTOCTRL: Completion Timeout Control

Device 3, Function 0, Offset 1E0h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.92](#).

8.12.3.72 XPCORERRSTS: XP Correctable Error Status

Device 3, Function 0, Offset 200h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.93](#).

8.12.3.73 XPCORERRMSK: XP Correctable Error Mask

Device 3, Function 0, Offset 204h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.94](#).

8.12.3.74 XPUNCERRSTS: XP Uncorrectable Error Status

Device 3, Function 0, Offset 208h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.95](#).

8.12.3.75 XPUNCERRMSK: XP Uncorrectable Error Mask

Device 3, Function 0, Offset 20Ch. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.96](#).

8.12.3.76 XPUNCERRSEV: XP Uncorrectable Error Severity

Device 3, Function 0, Offset 210h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.97](#).

8.12.3.77 UNCEDMASK: Uncorrectable Error Detect Status Mask

Device 3, Function 0, Offset 218h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.98](#).

8.12.3.78 COREDMASK: Correctable Error Detect Status Mask

Device 3, Function 0, Offset 21Ch. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.100](#).

8.12.3.79 RPEDMASK: Root Port Error Detect Status Mask

Device 3, Function 0, Offset 220h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.101](#).

**8.12.3.80 XPUNCEDMASK: XP Uncorrectable Error Detect Mask**

Device 3, Function 0, Offset 224h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.102](#).

8.12.3.81 XPCOREDMASK: XP Correctable Error Detect Mask

Device 3, Function 0, Offset 228h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.103](#).

8.12.3.82 XPLBERRSTS: XP Global Error Status

Device 3, Function 0, Offset 230h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.104](#).

8.12.3.83 XPLBERRPTR: XP Global Error Pointer

Device 3, Function 0, Offset 232h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.105](#).

8.12.3.84 PXP2CAP: Secondary PCI Express Extended Capability Header

Device 3, Function 0, Offset 250h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.106](#)

8.12.3.85 LNKCON3: Link Control 3 Register

Device 3, Function 0, Offset 254h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.107](#).

8.12.3.86 LNERRSTS: Lane Error Status Register

Device 3, Function 0, Offset 258h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.108](#).

8.12.3.87 LN[0:3]EQ: Lane 0 through Lane 3 Equalization Control

Device 3, Function 0, Offset 25Ch, 25Eh, 260h, 262h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.109](#).

8.12.3.88 LN[4:7]EQ: Lane 4 through Lane 7 Equalization Control

Device 3, Function 0, Offset 264h, 266h, 268h, 26Ah. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.110](#).

8.12.3.89 LN[8:15]EQ: Lane 8 though Lane 15 Equalization Control

Device 3, Function 0, Offset 26Ch, 26Eh, 270h, 272h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.108](#).

8.12.3.90 LER_CAP: Live Error Recovery Capability

Device 3, Function 0, Offset 280h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.112](#).



8.12.3.91 LER_HDR: Live Error Recovery Capability Header

Device 3, Function 0, Offset 284h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.113](#).

8.12.3.92 LER_CTRLSTS: Live Error Recovery Control and Status

Device 3, Function 0, Offset 288h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.114](#).

8.12.3.93 LER_UNCERRMSK: Live Error Recovery Uncorrectable Error Mask

Device 3, Function 0, Offset 28Ch. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.115](#).

8.12.3.94 LER_XPUNCERRMSK: Live Error Recovery XP Uncorrectable Error Mask

Device 3, Function 0, Offset 290h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.116](#).

8.12.3.95 LER_RPERRMSK: Live Error Recovery Uncorrectable Error Mask

Device 3, Function 0, Offset 294h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.117](#).

8.12.4 PCI Express Configuration Registers (NTB Secondary Side)

8.12.5 Configuration Register Map (NTB Secondary Side)

This section covers the NTB secondary side configuration space registers.

When configured as an NTB there are two sides to discuss for configuration registers. The primary side of the NTB's configuration space is located on Device 3, Function 0 with respect to the Intel Xeon processor E5 product family and a secondary side of the NTB's configuration space is located on some enumerated bus on another system and does not exist as configuration space on the local Intel Xeon processor E5 product family-based system anywhere.

Table 8-8. Device 0 Function 0 (Non -Transparent Bridge) Configuration Map 0x00h - 0xFCh (Sheet 1 of 2)

DID		VID		0h	MSIXMSGCTRL	MSIXNXTPT R	MSIXCAPID	80h
PCISTS		PCICMD		4h	TABLEOFF_BIR			84h
CCR			RID	8h	PBAOFF_BIR			88h
BIST	HDR	PLAT	CLSR	Ch				8Ch
SB01BASE				10h	PXPCAP	PXPNXTPTR	PXPCAPID	90h
				14h	DEVCAP			94h
SB23BASE				18h	DEVSTS	DEVCTRL		98h
				1Ch	LNKCAP			9Ch
SB45BASE				20h	LNKSTS	LNKCON		A0h
				24h				A4h
				28h				A8h



Table 8-8. Device 0 Function 0 (Non -Transparent Bridge) Configuration Map 0x00h - 0xFCh (Sheet 2 of 2)

SID		SUBVID		2Ch		ACh	
				30h		B0h	
		CAPPTR		34h	DEVCAP2	B4h	
				38h	DEVCTRL2	B8h	
MAXLAT	MINGNT	INTPIN	INTL	3Ch	LNKCAP2	BCh	
				40h	LNKSTS2	LNKCON2	C0h
				44h			C4h
				48h			C8h
				4Ch			CCh
				50h			D0h
				54h	SSCNTL		D4h
				58h			D8h
				5Ch			DCh
MSICTRL		MSINXTPTR	MSICAPID	60h	PMCAP	E0h	
MSIAR				64h	PMCSR	E4h	
MSIUAR				68h		E8h	
MSIDR				6Ch		ECh	
MSIMSK				70h		F0h	
MSIPENDING				74h		F4h	
				78h		F8h	
				7Ch		FCh	

Table 8-9. Device 0 Function 0 (Non -Transparent Bridge) Configuration Map 0x100h - 0x1FCh (Sheet 1 of 2)

PXP2CAP		100h		180h
LNERRSTS		104h		184h
LN1EQ	LN0EQ	108h		188h
LN3EQ	LN2EQ	10Ch		18Ch
LN5EQ	LN4EQ	110h		190h
LN7EQ	LN6EQ	114h		194h
LN9EQ	LN8EQ	118h		198h
LN11EQ	LN10EQ	11Ch		19Ch
LN13EQ	LN12EQ	120h		1A0h
LN15EQ	LN14EQ	124h		1A4h
		128h		1A8h
		12Ch		1ACh
		130h		1B0h
		134h		1B4h
		138h		1B8h
		13Ch	1BCh	
		140h	1C0h	
		144h	1C4h	



Table 8-9. Device 0 Function 0 (Non -Transparent Bridge) Configuration Map 0x100h - 0x1FCh (Sheet 2 of 2)

	148h		1C8h
	14Ch		1CCh
	150h		1D0h
	154h		1D4h
	158h		1D8h
	15Ch		1DCh
	160h		1E0h
	164h		1E4h
	168h		1E8h
	16Ch		1ECh
	170h		1F0h
	174h		1F4h
	178h		1F8h
	17Ch		1FCh

8.12.5.1 VID: Vendor Identification

VID Bus: M Device: 0Function: 0Offset: 0 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 500 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 500			
Bit	Attr	Default	Description
15:0	RO	8086h	Vendor Identification Number The value is assigned by PCI-SIG to Intel.

8.12.5.2 DID: Device Identification

DID Bus: M Device: 0Function: 0Offset: 02 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 502 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 502			
Bit	Attr	Default	Description
15:0	RO	3C0Fh	Device Identification Number The value is assigned by Intel to each product. For Processor IIO NTB Secondary Endpoint, the device ID is 0x3C0F.

8.12.5.3 PCICMD: PCI Command

This register defines the PCI 3.0 compatible command register values applicable to PCI Express space.



PCICMD Bus: M Device: 0Function: 0Offset: 04 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 504 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 504			
Bit	Attr	Default	Description
15:11	RV	0h	Reserved
10	RW	0b	INTxDisable Interrupt Disable. Controls the ability of the PCI Express port to generate INTx messages. This bit does not affect the ability of Processor to route interrupt messages received at the PCI Express port. However, this bit controls the generation of legacy interrupts to the DMI for PCI Express errors detected internally in this port (e.g. Malformed TLP, CRC error, completion time out etc.) or when receiving RP error messages or interrupts due to HP/PM events generated in legacy mode within Processor. Refer to the INTPIN register in Section 8.12.5.17 , "INTPIN: Interrupt Pin" on page 488 for interrupt routing to DMI. 1: Legacy Interrupt mode is disabled 0: Legacy Interrupt mode is enabled
9	RO	0b	Fast Back-to-Back Enable Not applicable to PCI Express must be hardwired to 0.
8	RO	0b	SERR Enable For PCI Express/DMI ports, this field enables notifying the internal core error logic of occurrence of an uncorrectable error (fatal or non-fatal) at the port. The internal core error logic of IIO then decides if/how to escalate the error further (pins/message etc.). This bit also controls the propagation of PCI Express ERR_FATAL and ERR_NONFATAL messages received from the port to the internal IIO core error logic. 1: Fatal and Non-fatal error generation and Fatal and Non-fatal error message forwarding is enabled 0: Fatal and Non-fatal error generation and Fatal and Non-fatal error message forwarding is disabled Refer to PCI Express Base Specification, Revision 2.0 for details of how this bit is used in conjunction with other control bits in the Root Control register for forwarding errors detected on the PCI Express interface to the system core error logic.
7	RO	0b	IDSEL Stepping/Wait Cycle Control Not applicable to PCI Express must be hardwired to 0.
6	RW	0b	Parity Error Response For PCI Express/DMI ports, IIO ignores this bit and always does ECC/parity checking and signaling for data/address of transactions both to and from IIO. This bit though affects the setting of bit 8 in the Section 8.12.5.4 , "PCISTS: PCI Status" on page 482.
5	RO	0b	VGA palette snoop Enable Not applicable to PCI Express must be hardwired to 0.
4	RO	0b	Memory Write and Invalidate Enable Not applicable to PCI Express must be hardwired to 0.
3	RO	0b	Special Cycle Enable Not applicable to PCI Express must be hardwired to 0.
2	RW	0b	Bus Master Enable 1: When this bit is Set, the PCIe NTB will forward Memory Requests that it receives on its primary internal interface to its secondary external link interface.0: When this bit is Clear, the PCIe NTB will not forward Memory Requests that it receives on its primary internal interface. Memory requests received on the primary internal interface will be returned to requester as an Unsupported Requests UR. Requests other than Memory Requests are not controlled by this bit. Default value of this bit is 0b.



PCICMD Bus: M Device: 0Function: 0Offset: 04 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 504 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 504			
Bit	Attr	Default	Description
1	RW	0b	Memory Space Enable 1: Enables a PCI Express port's memory range registers to be decoded as valid target addresses for transactions from secondary side. 0: Disables a PCI Express port's memory range registers (including the Configuration Registers range registers) to be decoded as valid target addresses for transactions from secondary side. all memory accesses received from secondary side are UR'ed
0	RO	0b	IO Space Enable Controls a device's response to I/O Space accesses. A value of 0 disables the device response. A value of 1 allows the device to respond to I/O Space accesses. State after RST# is 0.NTB does not support I/O space accesses. Hardwired to 0

8.12.5.4 PCIISTS: PCI Status

The PCI Status register is a 16-bit status register that reports the occurrence of various events associated with the primary side of the “virtual” PCI-PCI bridge embedded in PCI Express ports and also primary side of the other devices on the internal IIO bus.

PCIISTS Bus: M Device: 0Function: 0Offset: 06 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 506 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 506			
Bit	Attr	Default	Description
15	RW1C	0b	Detected Parity Error This bit is set by a device when it receives a packet on the primary side with an uncorrectable data error (that is, a packet with poison bit set or an uncorrectable data ECC error was detected at the XP-DP interface when ECC checking is done) or an uncorrectable address/control parity error. The setting of this bit is regardless of the Parity Error Response bit (PERRE) in the PCICMD register.
14	RO	0b	Signaled System Error 1: The device reported fatal/non-fatal (and not correctable) errors it detected on its PCI Express interface through the ERR[2:0] pins or message to PCH, with SERRE bit enabled. Software clears this bit by writing a '1' to it. For Express ports this bit is also set (when SERR enable bit is set) when a FATAL/NON-FATAL message is forwarded from the Express link to the ERR[2:0] pins or to PCH via a message. Note that IIO internal 'core' errors (like parity error in the internal queues) are not reported via this bit. 0: The device did not report a fatal/non-fatal error
13	RW1C	0b	Received Master Abort This bit is set when a device experiences a master abort condition on a transaction it mastered on the primary interface (IIO internal bus). Note that certain errors might be detected right at the PCI Express interface and those transactions errors might not 'propagate' to the primary interface before the error is detected (e.g. accesses to memory above TOCM in cases where the PCIe interface logic itself might have visibility into TOCM). Such errors do not cause this bit to be set, and are reported via the PCI Express interface error bits (secondary status register). Conditions that cause bit 13 to be set, include: Device receives a completion on the primary interface (internal bus of IIO) with Unsupported Request or master abort completion Status. This includes UR status received on the primary side of a PCI Express port on peer-to-peer completions also. Device accesses to holes in the main memory address region that are detected by the Intel QPI source address decoder. Other master abort conditions detected on the IIO internal bus amongst those listed in the xref <Blue> (IOH Platform Architecture Specification) chapter.



PCI STS Bus: M Device: 0Function: 0Offset: 06 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 506 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 506			
Bit	Attr	Default	Description
12	RW1C	0b	<p>Received Target Abort</p> <p>This bit is set when a device experiences a completer abort condition on a transaction it mastered on the primary interface (IIO internal bus). Note that certain errors might be detected right at the PCI Express interface and those transactions might not 'propagate' to the primary interface before the error is detected (e.g. accesses to memory above VTCSRBASE). Such errors do not cause this bit to be set, and are reported via the PCI Express interface error bits (secondary status register). Conditions that cause bit 12 to be set, include: Device receives a completion on the primary interface (internal bus of IIO) with completer abort completion Status. This includes CA status received on the primary side of a PCI Express port on peer-to-peer completions also. Accesses to Intel QPI that return a failed completion status</p> <p>Other completer abort conditions detected on the IIO internal bus amongst those listed in the xref <Blue> (IOH Platform Architecture Specification) chapter.</p>
11	RW1C	0b	<p>Signaled Target Abort</p> <p>This bit is set when the NTB port forwards a completer abort (CA) completion status from the primary interface to the secondary interface.</p>
10:9	RO	0h	<p>DEVSEL# Timing</p> <p>Not applicable to PCI Express. Hardwired to 0.</p>
8	RW1C	0b	<p>Master Data Parity Error</p> <p>This bit is set if the Parity Error Response bit in the PCI Command register is set and the Requestor receives a poisoned completion on the secondary interface or Requestor forwards a poisoned write request (including MSI/MSI-X writes) from the primary interface to the secondary interface.</p>
7	RO	0b	<p>Fast Back-to-Back</p> <p>Not applicable to PCI Express. Hardwired to 0.</p>
6	RO	0b	Reserved
5	RO	0b	<p>66 MHz capable</p> <p>Not applicable to PCI Express. Hardwired to 0.</p>
4	RO	1b	<p>Capabilities List</p> <p>This bit indicates the presence of a capabilities list structure</p>
3	RO-V	0b	<p>INTx Status</p> <p>When Set, indicates that an INTx emulation interrupt is pending internally in the Function.</p>
2:0	RV	0h	Reserved



8.12.5.5 RID: Revision Identification

RID Bus: M Device: 0Function: 0Offset: 08 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 508 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 508			
Bit	Attr	Default	Description
7:0	RO	00h	Revision_ID Reflects the Uncore Revision ID after reset. Reflects the Compatibility Revision ID after BIOS writes 0x69 to any RID register in any CPU function. Implementation Note: Read and write requests from the host to any RID register in any CPU function are re-directed to the IIO cluster. Accesses to the CCR field are also redirected due to DWORD alignment. It is possible that JTAG accesses are direct, so will not always be redirected.

8.12.5.6 CCR: Class Code

This register contains the Class Code for the device.

CCR Bus: M Device: 0Function: 0Offset: 09 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 509 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 509			
Bit	Attr	Default	Description
23:16	RO	06h	Base Class For PCI Express NTB port this field is hardwired to 06h, indicating it is a 'Bridge Device'.
15:8	RO	80h	Sub-Class For PCI Express NTB port, this field hardwired to 80h to indicate an 'Other bridge type'.
7:0	RO	00h	Register-Level Programming Interface This field is hardwired to 00h for PCI Express NTB port.

8.12.5.7 CLSR: Cacheline Size

CLSR Bus: M Device: 0Function: 0Offset: 0C Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 50C Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 50C			
Bit	Attr	Default	Description
7:0	RW	0h	Cacheline Size This register is set as RW for compatibility reasons only. Cacheline size for IIO is always 64B. IIO hardware ignore this setting.

8.12.5.8 PLAT: Primary Latency Timer

This register denotes the maximum time slice for a burst transaction in legacy PCI 2.3 on the primary interface. It does not affect/influence PCI Express functionality.



PLAT Bus: M Device: 0Function: 0Offset: 0D Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 50D Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 50D			
Bit	Attr	Default	Description
7:0	RO	0h	Prim_Lat_timer Primary Latency Timer Not applicable to PCI Express. Hardwired to 00h.

8.12.5.9 HDR: Header Type

This register identifies the header layout of the configuration space.

HDR Bus: M Device: 0Function: 0Offset: 0E Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 50E Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 50E			
Bit	Attr	Default	Description
7	RO	0b	Multi-function Device This bit defaults to 0 for PCI Express NTB port.
6:0	RO	00h	Configuration Layout This field identifies the format of the configuration header layout. It is Type0 for PCI Express NTB port. The default is 00h, indicating a 'non-bridge function'.

8.12.5.10 SB01BASE: Secondary BAR 0/1 Base Address

(PCIe NTB mode) This register is BAR 0/1 for the secondary side of the NTB. This configuration register can be modified via configuration transaction from the secondary side of the NTB and can also be modified from the primary side of the NTB via MMIO transaction to [Section 8.12.7.9, "SBAR0BASE: Secondary BAR 0/1 Base Address" on page 514](#)

SB01BASE Bus: M Device: 0Function: 0Offset: 10 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 510 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 510			
Bit	Attr	Default	Description
63:15	RW	00h	Secondary BAR 0/1 Base This register is reflected into the BAR 0/1 register pair in the Configuration Space of the Secondary side of the NTB written by SW on a 32 KB alignment.
14:4	RO	00h	Reserved Fixed size of 32 KB.
3	RW-O	1b	Prefetchable BAR points to Prefetchable memory (default) BAR points to Non-Prefetchable memory
2:1	RO	10b	Type Memory type claimed by BAR 2/3 is 64-bit addressable.
0	RO	0b	Memory Space Indicator BAR resource is memory (as opposed to I/O).



8.12.5.11 SB23BASE: Secondary BAR 2/3 Base Address

(PCIe NTB mode) This register is BAR 2/3 for the secondary side of the NTB. This configuration register can be modified via configuration transaction from the secondary side of the NTB and can also be modified from the primary side of the NTB via MMIO.

SB23BASE Bus: M Device: 0Function: 0Offset: 20 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 518 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 518			
Bit	Attr	Default	Description
63:12	RW	0h	Secondary BAR 2/3 Base Sets the location of the BAR written by SWNOTE: The number of bits that are writable in this register is dictated by the value loaded into the SBAR23SZ register Section 8.12.3.24, "SBAR23SZ: Secondary BAR 2/3 Size" on page 453 by the BIOS at initialization time (before BIOS PCI enumeration). SBAR23SZ indicates the lowest order bit of this register field that is writeable where valid values are 12-39. If SBAR23SZ is set to 12, all bits are writeable. If set to 39, then bits 38:12 are Read Only and will return values of 0. Note: For the special case where SBAR23SZ = '0', bits 63:0 are all RO='0' resulting in the BAR being disabled. Note: The lowest order address bit is 12 to enforce a minimum granularity of 4 KB.
11:4	RO	00h	Reserved Granularity must be at least 4 KB.
3	RO	1b	Prefetchable BAR points to Prefetchable memory.
2:1	RO	10b	Type Memory type claimed by BAR 2/3 is 64-bit addressable.
0	RO	0b	Memory Space Indicator BAR resource is memory (as opposed to I/O).

8.12.5.12 SB45BASE: Secondary BAR 4/5 Base Address

This register is BAR 4/5 for the secondary side of the NTB. This configuration register can be modified via configuration transaction from the secondary side of the NTB and can also be modified from the primary side of the NTB via MMIO transaction to "Secondary BAR 4/5 Base Address (SBAR4BASE)".

SB45BASE Bus: M Device: 0Function: 0Offset: 2C Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 520 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 520			
Bit	Attr	Default	Description
63:12	RW	0h	Secondary BAR 4/5 Base Sets the location of the BAR written by SWNOTE: The number of bits that are writable in this register is dictated by the value loaded into the SBAR45SZ register Section 8.12.3.25, "SBAR45SZ: Secondary BAR 4/5 Size" on page 453 by the BIOS at initialization time (before BIOS PCI enumeration). SBAR45SZ indicates the lowest order bit of this register field that is writeable where valid values are 12-39. If SBAR45SZ is set to 12, all bits are writeable. If set to 39, then bits 38:12 are Read Only and will return values of 0. Note: For the special case where SBAR45SZ = '0', bits 63:0 are all RO='0' resulting in the BAR being disabled. Note: The lowest order address bit is 12 to enforce a minimum granularity of 4 KB.



SB45BASE Bus: M Device: 0Function: 0Offset: 2C Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 520 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 520			
Bit	Attr	Default	Description
11:4	RO	00h	Reserved Granularity must be at least 4 KB.
3	RO	1b	Prefetchable BAR points to Prefetchable memory.
2:1	RO	10b	Type Memory type claimed by BAR 4/5 is 64-bit addressable.
0	RO	0b	Memory Space Indicator BAR resource is memory (as opposed to I/O).

8.12.5.13 SUBVID: Subsystem Vendor ID

This register identifies a particular subsystem.

SUBVID Bus: M Device: 0Function: 0Offset: 2C Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 52C Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 52C			
Bit	Attr	Default	Description
15:0	RW-O	0000h	Subsystem Vendor ID This field must be programmed during boot-up to indicate the vendor of the system board. When any byte or combination of bytes of this register is written, the register value locks and cannot be further updated.

8.12.5.14 SID: Subsystem Identity

This register identifies a particular subsystem.

SID Bus: M Device: 0Function: 0Offset: 2E Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 52E Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 52E			
Bit	Attr	Default	Description
15:0	RW-O	0000h	Subsystem ID This field must be programmed during BIOS initialization. When any byte or combination of bytes of this register is written, the register value locks and cannot be further updated.

8.12.5.15 CAPPTR: Capability Pointer

The CAPPTR is used to point to a linked list of additional capabilities implemented by the device. It provides the offset to the first set of capabilities registers located in the PCI compatible space.



CAPPTR Bus: M Device: 0Function: 0Offset: 34 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 534 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 534			
Bit	Attr	Default	Description
7:0	RW-O	60h	Capability Pointer Points to the first capability structure for the device.

8.12.5.16 INTL: Interrupt Line

The Interrupt Line register is used to communicate interrupt line routing information between initialization code and the device driver. This register is not used in newer OSes and is just kept as is.

INTL Bus: M Device: 0Function: 0Offset: 3C Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 53C Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 53C			
Bit	Attr	Default	Description
7:0	RW	00h	Interrupt Line This bit is RW for devices that can generate a legacy INTx message and is needed only for compatibility purposes.

8.12.5.17 INTPIN: Interrupt Pin

The INTP register identifies legacy interrupts for INTA, INTB, INTC and INTD as determined by BIOS/firmware. These are emulated over the DMI port using the appropriate Assert_Intx commands.

INTPIN Bus: M Device: 0Function: 0Offset: 3D Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 53D Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 53D			
Bit	Attr	Default	Description
7:0	RW-O	01h	INTP Interrupt Pin. This field defines the type of interrupt to generate for the PCI Express port.001: Generate INTA 010: Generate INTB 011: Generate INTC 100: Generate INTD Others: Reserved BIOS/configuration Software has the ability to program this register once during boot to set up the correct interrupt for the port. Note: While the PCI spec. defines only one interrupt line (INTA#) for a single function device, the logic for the NTB has been modified to meet customer requests for programmability of the interrupt pin. BIOS should always set this to INTA# for standard OS's.



8.12.5.18 MINGNT: Minimum Grant

MINGNT Bus: M Device: 0Function: 0Offset: 3E Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 53E Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 53E			
Bit	Attr	Default	Description
7:0	RO	00h	Minimum Grant This register does not apply to PCI Express. It is hard-coded to '00'h.

8.12.5.19 MAXLAT: Maximum Latency

MAXLAT Bus: M Device: 0Function: 0Offset: 3F Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 53F Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 53F			
Bit	Attr	Default	Description
7:0	RO	00h	Maximum Latency This register does not apply to PCI Express. It is hard-coded to '00'h.

8.12.5.20 MSICAPID: MSI Capability ID

MSICAPID Bus: M Device: 0Function: 0Offset: 60 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 560 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 560			
Bit	Attr	Default	Description
7:0	RO	05h	Capability ID Assigned by PCI-SIG for MSI.

8.12.5.21 MSINXTPTR: MSI Next Pointer

MSINXTPTR Bus: M Device: 0Function: 0Offset: 61 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 561 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 561			
Bit	Attr	Default	Description
7:0	RW-O	80h	Next Ptr This field is set to 80h for the next capability list (PCI Express capability structure) in the chain.



8.12.5.22 MSICTRL: MSI Control

MSICTRL Bus: M Device: 0Function: 0Offset: 62 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 562 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 562			
Bit	Attr	Default	Description
15:9	RV	0h	Reserved
8	RO	1b	Per-vector masking capable This bit indicates that PCI Express ports support MSI per-vector masking.
7	RO-V	0b	64-bit Address Capable A PCI Express Endpoint must support the 64-bit Message Address version of the MSI Capability structure 1: Function is capable of sending 64-bit message address 0: Function is not capable of sending 64-bit message address.
6:4	RW	000b	Multiple Message Enable Applicable only to PCI Express ports. Software writes to this field to indicate the number of allocated messages which is aligned to a power of two. When MSI is enabled, the software will allocate at least one message to the device. A value of 000 indicates 1 message. Value Number of Messages Requested 000b = 1 001b = 2 010b = 4 011b = 8 100b = 16 101b = 32 110b = Reserved 111b = Reserved
3:1	RO	001b	Multiple Message Capable IOH's PCI Express port supports 16 messages for all internal events.Value Number of Messages Requested 000b = 1 001b = 2 010b = 4 011b = 8 100b = 16 101b = 32 110b = Reserved 111b = Reserved
0	RW	0b	MSI Enable The software sets this bit to select platform-specific interrupts or transmit MSI messages.0: Disables MSI from being generated. 1: Enables the PCI Express port to use MSI messages for RAS, provided bit 4 in Section 8.12.3.50, "MISCCTRLSTS: Misc. Control and Status" on page 460 is clear and also enables the Express port to use MSI messages for PM and HP events at the root port provided these individual events are not enabled for ACPI handling (see Section 8.12.3.50, "MISCCTRLSTS: Misc. Control and Status" on page 460 for details. Note: Software must disable INTx and MSI-X for this device when using MSI

8.12.5.23 MSIAR: MSI Address

The MSI Address Register (MSIAR) contains the system specific address information to route MSI interrupts from the root ports and is broken into its constituent fields.



MSIAR Bus: M Device: 0Function: 0Offset: 64 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 564 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 564			
Bit	Attr	Default	Description
31:20	RW	0h	Address MSB This field specifies the 12 most significant bits of the 32-bit MSI address. This field is R/W.
19:12	RW	00h	Address Destination ID This field is initialized by software for routing the interrupts to the appropriate destination.
11:4	RW	00h	Address Extended Destination ID This field is not used by IA32 processor and is used in IPF as an address extension.
3	RW	0h	Address Redirection Hint 0: directed1: redirectable
2	RW	0h	Address Destination Mode 0: physical1: logical
1:0	RO	0h	Reserved.

8.12.5.24 MSIUAR: Upper Address MSB

If the MSI Enable bit (bit 0 of the MSICTRL) is set, the contents of this register (if non-zero) specify the upper 32-bits of a 64-bit message address (AD[63:32]). If the contents of this register are zero, the function uses the 32 bit address specified by the message address register.

MSIUAR Bus: M Device: 0Function: 0Offset: 68 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 568 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 568			
Bit	Attr	Default	Description
31:0	RW	00000000h	MSI Upper Address Register

8.12.5.25 MSIDR: MSI Data

MSIDR Bus: M Device: 0Function: 0Offset: 6C Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 568 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 568			
Bit	Attr	Default	Description
31:16	RO	0000h	Reserved.
15	RW	0h	Trigger Mode 0: Edge Triggered 1: Level Triggered Note: IIO does nothing with this bit other than passing it along to Intel QPI



MSIDR Bus: M Device: 0Function: 0Offset: 6C Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 568 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 568			
Bit	Attr	Default	Description
14	RW	0h	Level 0: Deassert 1: Assert Note: IIO does nothing with this bit other than passing it along to Intel QPI
13:12	RW	0h	Don't care for IIO
11:8	RW	0h	Delivery Mode 0000: Fixed: Trigger Mode can be edge or level. 0001: Lowest Priority: Trigger Mode can be edge or level. 0010: SMI/PMI/MCA - Not supported via MSI of root port 0011: Reserved - Not supported via MSI of root port 0100: NMI - Not supported via MSI of root port 0101: INIT - Not supported via MSI of root port 0110: Reserved 0111: ExtINT - Not supported via MSI of root port Others: Reserved
7:0	RW	00h	Interrupt Vector The interrupt vector (LSB) will be modified by the IIO to provide context sensitive interrupt information for different events that require attention from the processor. Only 1 message can be enabled by software, so all events may use any vector.

8.12.5.26 MSIMSK: MSI Mask Bit

The Mask Bit register enables software to disable message sending on a per-vector basis.

MSIMSK Bus: M Device: 0Function: 0Offset: 70 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 56C Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 56C			
Bit	Attr	Default	Description
31:1	RV	0h	Reserved
0	RW	0h	Mask Bit For each Mask bit that is set, the PCI Express port is prohibited from sending the associated message.NTB supports up to 1 messages Corresponding bits are masked if set to '1'

8.12.5.27 MSIPENDING: MSI Pending Bit

The Mask Pending register enables software to defer message sending on a per-vector basis.



MSIPENDING Bus: M Device: 0Function: 0Offset: 74 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 570 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 570			
Bit	Attr	Default	Description
31:1	RV	0h	Reserved
0	RO	0h	Pending Bits For each Pending bit that is set, the PCI Express port has a pending associated message. NTB supports 1 message. Corresponding bits are pending if set to '1'.

8.12.5.28 MSIXCAPID: MSI-X Capability ID

MSIXCAPID Bus: M Device: 0Function: 0Offset: 80 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 580 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 580			
Bit	Attr	Default	Description
7:0	RO	11h	Capability ID Assigned by PCI-SIG for MSI-X.

8.12.5.29 MSIXNXPTR: MSI-X Next Pointer

MSIXNXPTR Bus: M Device: 0Function: 0Offset: 81 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 581 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 581			
Bit	Attr	Default	Description
7:0	RO	90h	Next Ptr This field is set to 90h for the next capability list (PCI Express capability structure) in the chain.

8.12.5.30 MSIXMSGCTRL: MSI-X Message Control

MSIXMSGCTRL Bus: M Device: 0Function: 0Offset: 82 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 582 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 582			
Bit	Attr	Default	Description
15	RW	0b	MSI-X Enable Software uses this bit to select between INTx or MSI or MSI-X method for signaling interrupts from the NTB 0: NTB is prohibited from using MSI-X to request service 1: MSI-X method is chosen for NTB interrupts Note: Software must disable INTx and MSI for this device when using MSI-X



MSI XMSGCTRL Bus: M Device: 0Function: 0Offset: 82 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 582 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 582			
Bit	Attr	Default	Description
14	RW	0b	Function Mask If = 1b, all the vectors associated with the NTB are masked, regardless of the per vector mask bit state. If = 0b, each vector's mask bit determines whether the vector is masked or not. Setting or clearing the MSI-X function mask bit has no effect on the state of the per-vector Mask bit.
13:11	RO	0h	Reserved.
10:0	RO	003h	Table Size System software reads this field to determine the MSI-X Table Size N, which is encoded as N-1. For example, a returned value of '00000000011' indicates a table size of 4. NTB table size is 4, encoded as a value of 003h

8.12.5.31 TABLEOFF_BIR: MSI-X Table Offset and BAR Indicator

TABLEOFF_BIR Bus: M Device: 0Function: 0Offset: 84 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 584 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 584			
Bit	Attr	Default	Description
31:3	RO	00000800h	Table Offset MSI-X Table Structure is at offset 16K from the SB01BASE BAR address. Section 8.12.8.1, "PMSIXTBL[0:3]: Primary MSI-X Table Address Register 0 - 3" on page 526 for the start of details relating to MSI-X registers. NOTE: Offset placed at 16K so that it can also be visible through the primary BAR for debug purposes.
2:0	RO	0h	Table BIR Indicates which one of a function's Base Address registers, located beginning at 10h in Configuration Space, is used to map the function's MSI-X Table into Memory Space. BIR Value Base Address register 0 10h 1 14h 2 18h 3 1Ch 4 20h 5 24h 6 Reserved 7 Reserved For a 64-bit Base Address register, the Table BIR indicates the lower DWORD.



8.12.5.32 PBAOFF_BIR: MSI-X Pending Bit Array Offset and BAR Indicator

Bit	Attr	Default	Description
PBAOFF_BIR Bus: M Device: 0Function: 0Offset: 88 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 588 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 588			
31:3	RO	0000A00h	Table Offset MSI-X PBA Structure is at offset 20K from the SB01BASE BAR address. See Section 8.12.9.4, "SMSICXPBA: Secondary MSI-X Pending Bit Array" on page 530 for details. Note: Offset placed at 20K so that it can also be visible through the primary BAR for debug purposes.
2:0	RO	0h	PBA BIR Indicates which one of a function's Base Address registers, located beginning at 10h in Configuration Space, is used to map the function's MSI-X Table into Memory Space. BIR Value Base Address register 0 10h 1 14h 2 18h 3 1Ch 4 20h 5 24h 6 Reserved 7 Reserved For a 64-bit Base Address register, the Table BIR indicates the lower DWORD.

8.12.5.33 PXPCAPID: PCI Express Capability Identity

The PCI Express Capability List register enumerates the PCI Express Capability structure in the PCI 3.0 configuration space.

Bit	Attr	Default	Description
PXPCAPID Bus: M Device: 0Function: 0Offset: 90 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 590 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 590			
7:0	RO	10h	Capability ID Provides the PCI Express capability ID assigned by PCI-SIG. Required by <i>PCI Express* Base Specification</i> , Revision 2.0 to be this value.

8.12.5.34 PXPNTPTR: PCI Express Next Pointer

The PCI Express Capability List register enumerates the PCI Express Capability structure in the PCI 3.0 configuration space.



PXPNXTPTR Bus: M Device: 0Function: 0Offset: 91 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 591 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 591			
Bit	Attr	Default	Description
7:0	RW-O	E0h	Next Ptr This field is set to the PCI PM capability.

8.12.5.35 PXPCAP: PCI Express Capabilities

The PCI Express Capabilities register identifies the PCI Express device type and associated capabilities.

PXPCAP Bus: M Device: 0Function: 0Offset: 92 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 592 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 592			
Bit	Attr	Default	Description
15:14	RV	0h	Reserved
13:9	RO	0h	Interrupt Message Number Applies only to the RPs. This field indicates the interrupt message number that is generated for PM/HP events. When there are more than one MSI interrupt Number, this register field is required to contain the offset between the base Message Data and the MSI Message that is generated when the status bits in the slot status register or RP status registers are set. IIO assigns the first vector for PM/HP events and so this field is set to 0.
8	RW-O	0b	Slot Implemented Applies only to the RPs for NTB this value is kept at 0b. 1: indicates that the PCI Express link associated with the port is connected to a slot. 0: indicates no slot is connected to this port. This register bit is of type 'write once' and is controlled by BIOS/special initialization firmware.
7:4	RO	0000b	Device/Port Type This field identifies the type of device. 0000b = PCI Express Endpoint.
3:0	RW-O	2h	Capability Version This field identifies the version of the PCI Express capability structure. Set to 2h for PCI Express devices for compliance with the extended base registers.

8.12.5.36 DEVCAP: PCI Express Device Capabilities Register

The PCI Express Device Capabilities register identifies device specific information for the device.

DEVCAP Bus: M Device: 0Function: 0Offset: 94 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 594 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 594			
Bit	Attr	Default	Description
31:29	RV	0h	Reserved



DEVCAP Bus: M Device: 0Function: 0Offset: 94 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 594 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 594			
Bit	Attr	Default	Description
28	RO	0b	Function Level Reset Capability A value of 1b indicates the Function supports the optional Function Level Reset mechanism. NTB does not support this functionality
27:26	RO	0h	Captured Slot Power Limit Scale Does not apply to RPs or integrated devices This value is hardwired to 00h NTB is required to be able to receive the Set_Slot_Power_Limit message without error but simply discard the Message value. <i>Note:</i> Components with Endpoint, Switch, or PCI Express-PCI Bridge Functions that are targeted for integration on an adapter where total consumed power is below the lowest limit defined for the targeted form factor are permitted to ignore Set_Slot_Power_Limit Messages, and to return a value of 0 in the Captured Slot Power Limit Value and Scale fields of the Device Capabilities register
25:18	RO	00h	Captured Slot Power Limit Value Does not apply to RPs or integrated devices This value is hardwired to 00h NTB is required to be able to receive the Set_Slot_Power_Limit message without error but simply discard the Message value. <i>Note:</i> Components with Endpoint, Switch, or PCI Express-PCI Bridge Functions that are targeted for integration on an adapter where total consumed power is below the lowest limit defined for the targeted form factor are permitted to ignore Set_Slot_Power_Limit Messages, and to return a value of 0 in the Captured Slot Power Limit Value and Scale fields of the Device Capabilities register
17:16	RV	0h	Reserved
15	RO	1b	Role Based Error Reporting IIO is 1.1 compliant and so supports this feature
14	RO	0b	Power Indicator Present on Device Does not apply to RPs or integrated devices
13	RO	0b	Attention Indicator Present Does not apply to RPs or integrated devices
12	RO	0b	Attention Button Present Does not apply to RPs or integrated devices
11:9	RO	110b	Endpoint L1 Acceptable Latency This field indicates the acceptable total latency that an Endpoint can withstand due to the transition from L0s state to the L0 state. It is essentially an indirect measure of the Endpoint's internal buffering. Power management software uses the reported L0s Acceptable Latency number to compare against the L0s exit latencies reported by all components comprising the data path from this Endpoint to the Root Complex Root Port to determine whether ASPM L0s entry can be used with no loss of performance. Defined encodings are: 000b Maximum of 64 ns 001b Maximum of 128 ns 010b Maximum of 256 ns 011b Maximum of 512 ns 100b Maximum of 1 us 101b Maximum of 2 us 110b Maximum of 4 us 111b No limit



DEVCAP Bus: M Device: 0Function: 0Offset: 94 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 594 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 594			
Bit	Attr	Default	Description
8:6	RO	000b	Endpoint L0s Acceptable Latency This field indicates the acceptable latency that an Endpoint can withstand due to the transition from L1 state to the L0 state. It is essentially an indirect measure of the Endpoint's internal buffering. Power management software uses the reported L1 Acceptable Latency number to compare against the L1 Exit Latencies reported (see below) by all components comprising the data path from this Endpoint to the Root Complex Root Port to determine whether ASPM L1 entry can be used with no loss of performance. Defined encodings are: 000b Maximum of 1 us 001b Maximum of 2 us 010b Maximum of 4 us 011b Maximum of 8 us 100b Maximum of 16 us 101b Maximum of 32 us 110b Maximum of 64 us 111b No limit
5	RO	1b	Extended Tag Field Supported IIO devices support 8-bit tag1 = Maximum Tag field is 8 bits 0 = Maximum Tag field is 5 bits
4:3	RO	00b	Phantom Functions Supported IIO does not support phantom functions. 00b = No Function Number bits are used for Phantom Functions
2:0	RO	001b	Max Payload Size Supported IIO supports 256B payloads on PCI Express ports 001b = 256 bytes max payload size

8.12.5.37 DEVCTRL: PCI Express Device Control

(PCIe NTB Secondary) The PCI Express Device Control register controls PCI Express specific capabilities parameters associated with the device

DEVCTRL Bus: M Device: 0Function: 0Offset: 98 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 598 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 598			
Bit	Attr	Default	Description
15	RV	0h	Reserved
14:12	RO	000b	Max_Read_Request_Size Express/DMI ports in IIO do not generate requests greater than 128B and this field is ignored.
11	RO	0b	Enable No Snoop Not applicable since the NTB is never the originator of a TLP. This bit has no impact on forwarding of NoSnoop attribute on peer requests.
10	RO	0b	Auxiliary Power Management Enable Not applicable to IIO
9	RO	0b	Phantom Functions Enable Not applicable to IIO since it never uses phantom functions as a requester.
8	RW	0h	Extended Tag Field Enable This bit enables the PCI Express/DMI ports to use an 8-bit Tag field as a requester.



DEVCTRL Bus: M Device: 0Function: 0Offset: 98 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 598 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 598			
Bit	Attr	Default	Description
7:5	RW	000b	<p>Max Payload Size</p> <p>This field is set by configuration software for the maximum TLP payload size for the PCI Express port. As a receiver, the IIO must handle TLPs as large as the set value. As a requester (i.e. for requests where IIO's own RequesterID is used), it must not generate TLPs exceeding the set value. Permissible values that can be programmed are indicated by the Max_Payload_Size_Supported in the Device Capabilities register: 000: 128B max payload size 001: 256B max payload size (applies only to standard PCI Express ports and DMI port aliases to 128B) others: alias to 128B</p> <p>This field is RW for PCI Express ports.</p>
4	RO	0b	<p>Enable Relaxed Ordering</p> <p>When set, the NTB does not send any outbound traffic with RO bit set, regardless of whether it was forwarded from the local CPU or from a local peer source</p>
3	RW	0b	<p>Unsupported Request Reporting Enable</p> <p>Applies only to the PCI Express/DMI ports. This bit controls the reporting of unsupported requests that IIO itself detects on requests its receives from a PCI Express/DMI port.</p> <p>0: Reporting of unsupported requests is disabled 1: Reporting of unsupported requests is enabled.</p> <p>Refer to PCI Express Base Specification, Revision 2.0 for complete details of how this bit is used in conjunction with other bits to UR errors.</p>
2	RW	0b	<p>Fatal Error Reporting Enable</p> <p>Applies only to the PCI Express RP/PCI Express NTB Secondary interface/DMI ports. Controls the reporting of fatal errors that IIO detects on the PCI Express/DMI interface.</p> <p>0: Reporting of Fatal error detected by device is disabled 1: Reporting of Fatal error detected by device is enabled</p> <p>Refer to PCI Express Base Specification, Revision 2.0 for complete details of how this bit is used in conjunction with other bits to report errors.</p> <p>For the PCI Express/DMI ports, this bit is not used to control the reporting of other internal component uncorrectable fatal errors (at the port unit) in any way.</p>
1	RW	0b	<p>Non Fatal Error Reporting Enable</p> <p>Applies only to the PCI Express RP/PCI Express NTB Secondary interface/DMI ports. Controls the reporting of non-fatal errors that IIO detects on the PCI Express/DMI interface.</p> <p>0: Reporting of Non Fatal error detected by device is disabled 1: Reporting of Non Fatal error detected by device is enabled</p> <p>Refer to PCI Express Base Specification, Revision 2.0 for complete details of how this bit is used in conjunction with other bits to report errors.</p> <p>For the PCI Express/DMI ports, this bit is not used to control the reporting of other internal component uncorrectable non-fatal errors (at the port unit) in any way.</p>
0	RW	0b	<p>Correctable Error Reporting Enable</p> <p>Applies only to the PCI Express RP/PCI Express NTB Secondary interface/DMI ports. Controls the reporting of correctable errors that IIO detects on the PCI Express/DMI interface</p> <p>0: Reporting of link Correctable error detected by the port is disabled 1: Reporting of link Correctable error detected by port is enabled</p> <p>Refer to PCI Express Base Specification, Revision 2.0 for complete details of how this bit is used in conjunction with other bits to report errors.</p> <p>For the PCI Express/DMI ports, this bit is not used to control the reporting of other internal component correctable errors (at the port unit) in any way.</p>



8.12.5.38 DEVSTS: PCI Express Device Status

The PCI Express Device Status register provides information about PCI Express device specific parameters associated with the device.

DEVSTS Bus: M Device: 0Function: 0Offset: 9A Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 59A Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 59A			
Bit	Attr	Default	Description
15:6	RV	0h	Reserved
5	RO	0h	Transactions Pending
4	RO	0b	AUX Power Detected Does not apply to IIO
3	RW1C	0b	Unsupported Request Detected This bit applies only to the root/DMI ports. This bit indicates that the NTB secondary detected an Unsupported Request. Errors are logged in this register regardless of whether error reporting is enabled or not in the Device Control Register. 1: Unsupported Request detected at the device/port. These unsupported requests are NP requests inbound that the RP received and it detected them as unsupported requests (e.g. address decoding failures that the RP detected on a packet, receiving inbound lock reads, BME bit is clear etc.). Note that this bit is not set on peer2peer completions with UR status that are forwarded by the RP to the PCIe link. 0: No unsupported request detected by the RP
2	RW1C	0b	Fatal Error Detected This bit indicates that a fatal (uncorrectable) error is detected by the NTB secondary device. Errors are logged in this register regardless of whether error reporting is enabled or not in the Device Control register. 1: Fatal errors detected 0: No Fatal errors detected
1	RW1C	0b	Non Fatal Error Detected This bit gets set if a non-fatal uncorrectable error is detected by the NTB secondary device. Errors are logged in this register regardless of whether error reporting is enabled or not in the Device Control register. 1: Non Fatal errors detected 0: No non-Fatal Errors detected
0	RW1C	0b	Correctable Error Detected This bit gets set if a correctable error is detected by the NTB secondary device. Errors are logged in this register regardless of whether error reporting is enabled or not in the PCI Express Device Control register. 1: correctable errors detected 0: No correctable errors detected

8.12.5.39 LNKCAP: PCI Express Link Capabilities

The Link Capabilities register identifies the PCI Express specific link capabilities.



LNKCAP Bus: M Device: 0Function: 0Offset: 9C Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 59C Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 59C			
Bit	Attr	Default	Description
31:24	RO	00h	Port Number This field indicates the PCI Express port number for the link and is initialized by software/BIOS. Notes: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB.
23:22	RV	0h	Reserved
21	RO	0b	Link Bandwidth Notification Capability A value of 1b indicates support for the Link Bandwidth Notification status and interrupt mechanisms.
20	RO	1b	Data Link Layer Link Active Reporting Capable IIO supports reporting status of the data link layer so software knows when it can enumerate a device on the link or otherwise know the status of the link.
19	RO	1b	Surprise Down Error Reporting Capable IIO supports reporting a surprise down error condition
18	RO	0b	Clock Power Management Does not apply to IIO.
17:15	RO	010b	L1 Exit Latency This field indicates the L1 exit latency for the given PCI Express port. It indicates the length of time this port requires to complete transition from L1 to L0. 000: Less than 1 us 001: 1 us to less than 2 us 010: 2 us to less than 4 us 011: 4 us to less than 8 us 100: 8 us to less than 16 us 101: 16 us to less than 32 us 110: 32 us to 64 us 111: More than 64 us Note: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB.
14:12	RO	011b	L0s Exit Latency This field indicates the L0s exit latency (i.e L0s to L0) for the PCI Express port. 000: Less than 64 ns 001: 64 ns to less than 128 ns 010: 128 ns to less than 256 ns 011: 256 ns to less than 512 ns 100: 512 ns to less than 1 us 101: 1 us to less than 2 us 110: 2 us to 4 us 111: More than 4 us Notes: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB.



LNKCAP Bus: M Device: 0Function: 0Offset: 9C Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 59C Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 59C			
Bit	Attr	Default	Description
11:10	RO	11b	Active State Link PM Support This field indicates the level of active state power management supported on the given PCI Express port. 00: Disabled 01: L0s Entry Supported 10: Reserved 11: L0s and L1 Supported Note: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB.
9:4	RO	8h	Maximum Link Width This field indicates the maximum width of the given PCI Express Link attached to the port. 000001: x1 000010: x2 000100: x4 001000: x8 010000: x16 Others: Reserved Note: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB.
3:0	RO	0011b	Maximum Link Speed This field indicates the maximum link speed of this Port. The encoding is the binary value of the bit location in the Supported Link Speeds Vector (in LNKCAP2) that corresponds to the maximum link speed. cpu supports a maximum of 8Gbps, unless restricted by the Gen3_OFF fuse. If Gen3_OFF fuse is '1', this field defaults to 0010b (5Gbps) If Gen3_OFF fuse is '0' this field defaults to 0011b (8Gbps)

8.12.5.40 LNKCON: PCI Express Link Control

The PCI Express Link Control register controls the PCI Express Link specific parameters.

LNKCON Bus: M Device: 0Function: 0Offset: A0 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 5A0 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 5A0			
Bit	Attr	Default	Description
15:10	RV	0h	Reserved
9	RO	0b	Hardware Autonomous Width Disable IIO never changes a configured link width for reasons other than reliability.
8	RO	0b	Enable Clock Power Management N/A to IIO
7	RW-V	0b	Extended Synch This bit when set forces the transmission of additional ordered sets when exiting L0s and when in recovery. See PCI Express Base Specification, Revision 2.0 for details.



LNKCON			
Bus: M Device: 0Function: 0Offset: A0			
Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 5A0			
Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 5A0			
Bit	Attr	Default	Description
6	RW-V	0b	Common Clock Configuration IIO does nothing with this bit
5:4	RV	0h	Reserved
3	RO	0b	Read Completion Boundary Set to zero to indicate IIO could return read completions at 64B boundaries Note: NTB is not PCIe compliant in this respect. NTB is only capable of 64B RCB. If connecting to non IA IP and the IP does the optional 128B RCB check on received packets, packets will be seen as malformed. This is not an issue with any Intel IP.
2	RV	0h	Reserved
1:0	RW	00b	Active State Link PM Control When 01b or 11b, L0s on transmitter is enabled, otherwise it is disabled.

8.12.5.41 LNKSTS: PCI Express Link Status

The PCI Express Link Status register provides information on the status of the PCI Express Link such as negotiated width, training, and so forth.

LNKSTS			
Bus: M Device: 0Function: 0Offset: A2			
Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 5A2			
Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 5A2			
Bit	Attr	Default	Description
15:14	RV	0h	Reserved
13	RO	0b	Data Link Layer Link Active Set to 1b when the Data Link Control and Management State Machine is in the DL_Active state, 0b otherwise. On a downstream port or upstream port, when this bit is 0b, the transaction layer associated with the link will abort all transactions that would otherwise be routed to that link.
12		1b	Slot Clock Configuration This bit indicates whether IIO receives clock from the same xtal that also provides clock to the device on the other end of the link. 1: indicates that same xtal provides clocks to devices on both ends of the link 0: indicates that different xtals provide clocks to devices on both ends of the link Note: This register bit is a RW-O register from the host side. It must be loaded by BIOS in the primary side equivalent register. This register is RO from the secondary side of the NTB. 256_2_3_Parent: Attr: RO Default: 1b 0_3_0_PB01BASE: Attr: RO Default: 1b 0_3_0_SB01BASE: Attr: RW-O Default: 1b
11	RO	0b	Link Training This field indicates the status of an ongoing link training session in the PCI Express port. 0: LTSSM has exited the recovery/configuration state 1: LTSSM is in recovery/configuration state or the Retrain Link was set but training has not yet begun. The IIO hardware clears this bit once LTSSM has exited the recovery/configuration state. Refer to PCI Express Base Specification, Revision 2.0 for details of which states within the LTSSM would set this bit and which states would clear this bit.



LNKSTS			
Bus: M Device: 0Function: 0Offset: A2			
Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 5A2			
Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 5A2			
Bit	Attr	Default	Description
10	RO	0b	Reserved
9:4	RO	0h	Negotiated Link Width This field indicates the negotiated width of the given PCI Express link after training is completed. Only x1, x2, x4, x8 and x16 link width negotiations are possible in IIO. A value of 0x01 in this field corresponds to a link width of x1, 0x02 indicates a link width of x2 and so on, with a value of 0x16 for a link width of x16. The value in this field is reserved and could show any value when the link is not up. Software determines if the link is up or not by reading bit 13 of this register.
3:0	RO-V	1h	Current Link Speed This field indicates the negotiated Link speed of the given PCI Express Link. 0001: 2.5 Gbps 0010: 5 Gbps 0011: 8Gbps (Processor will never set this value when Gen3_OFF fuse is blown) Others: Reserved The value in this field is not defined when the link is not up. Software determines if the link is up or not by reading bit 13 of this register.

8.12.5.42 SSCNTL: Secondary Side Control

This register provides secondary side control of NTB functions.

SSCNTL			
Bus: M Device: 0Function: 0Offset: D4			
Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 5D4			
Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 5D4			
Bit	Attr	Default	Description
15:1	RO	0h	Reserved
0	RW	0b	NTB Secondary side MSI-X Single Message Vector: This bit when set, causes only a single MSI-X message to be generated if MSI-X is enabled. This bit affects the default value of the MSI-X Table Size field in the 'SMSIXTBLO-3: Secondary MSI-X Table Address Register 0 - 3.

8.12.5.43 PMCAP: Power Management Capabilities

The PM Capabilities Register defines the capability ID, next pointer and other power management related support. The following PM registers /capabilities are added for software compliance.



PMCAP Bus: M Device: 0Function: 0Offset: E0 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 5E0 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 5E0			
Bit	Attr	Default	Description
31:27	RO	0h	PME Support Indicates the PM states within which the function is capable of sending a PME message. NTB secondary side does not forward PME messages. Bit 31 = D3cold Bit 30 = D3hot Bit 29 = D2 Bit 28 = D1 Bit 27 = D0
26	RO	0b	D2 Support IIO does not support power management state D2.
25	RO	0b	D1 Support IIO does not support power management state D1.
24:22	RO	000b	AUX Current Device does not support auxiliary current
21	RO	0b	Device Specific Initialization Device initialization is not required
20	RV	0h	Reserved
19	RO	0b	PME Clock This field is hardwired to 0h as it does not apply to PCI Express.
18:16	RO	011b	Version This field is set to 3h (PM 1.2 compliant) as version number for all PCI Express ports.
15:8	RO	00h	Next Capability Pointer This is the last capability in the chain and hence set to 0.
7:0	RO	01h	Capability ID Provides the PM capability ID assigned by PCI-SIG.

8.12.5.44 PMCSR: Power Management Control and Status

This register provides status and control information for PM events in the PCI Express port of the IIO.


PMCSR Bus: M Device: 0Function: 0Offset: E4 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 5E4 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 5E4			
Bit	Attr	Default	Description
31:24	RO	00h	Data Not relevant for IIO
23	RO	0h	Bus Power/Clock Control Enable This field is hardwired to 0h as it does not apply to PCI Express.
22	RO	0h	B2/B3 Support This field is hardwired to 0h as it does not apply to PCI Express.
21:16	RV	0h	Reserved



PMCSR Bus: M Device: 0Function: 0Offset: E4 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 5E4 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 5E4			
Bit	Attr	Default	Description
15	RO	0h	<p>PME Status</p> <p>Applies only to RPs This bit is hard-wired to read-only 0, since this function does not support PME# generation from any power state.</p> <p>This PME Status is a sticky bit. This bit is set, independent of the PMEEN bit defined below, on an enabled PCI Express hot-plug event provided the RP was in D3hot state. Software clears this bit by writing a '1' when it has been completed. Refer to PCI Express Base Specification, Revision 2.0 for further details on wake event generation at a RP</p>
14:13	RO	0h	<p>Data Scale</p> <p>Not relevant for IIO</p>
12:9	RO	0h	<p>Data Select</p> <p>Not relevant for IIO</p>
8	RO	0h	<p>PME Enable</p> <p>Applies only to RPs.</p> <p>0: Disable ability to send PME messages when an event occurs 1: Enables ability to send PME messages when an event occurs</p>
7:4	RV	0h	Reserved
3	RW-O	1b	Indicates IIO does not reset its registers when it transitions from D3hot to D0
2	RV	0h	Reserved
1:0	RW	0h	<p>Power State</p> <p>This 2-bit field is used to determine the current power state of the function and to set a new power state as well. 00: D0 01: D1 (not supported by IIO) 10: D2 (not supported by IIO) 11: D3_hot</p> <p>If Software tries to write 01 or 10 to this field, the power state does not change from the existing power state (which is either D0 or D3hot) and nor do these bits 1:0 change value.</p> <p>All devices will respond to only Type 0 configuration transactions when in D3hot state (RP will not forward Type 1 accesses to the downstream link) and will not respond to memory/IO transactions (that is, D3hot state is equivalent to MSE/IOSE bits being clear) as target and will not generate any memory/IO/ configuration transactions as initiator on the primary bus (messages are still allowed to pass through).</p>

8.12.5.45 PXP2CAP: Secondary PCI Express Extended Capability Header

PXP2CAP Bus: M Device: 0Function: 0Offset: 100			
Bit	Attr	Default	Description
31:20	RO	000h	<p>Next Capability Offset</p> <p>This field contains the offset to the next PCI Express Extended Capability structure or 000h if no other items exist in the linked list of capabilities.</p>
19:16	RO	1h	<p>Capability Version</p> <p>This field is a PCI-SIG defined version number that indicates the version of the Capability structure present. Must be 1h for this version of the specification.</p>
15:0	RO	0000h	<p>PCI Express Extended Capability ID</p> <p>This field is a PCI SIG defined ID number that indicates the nature and format of the Extended Capability. PCI Express Extended Capability ID for the Secondary PCI Express Extended Capability is 0x0019h</p>



8.12.5.46 LNERSTS: Lane Error Status Register

Device 0, Function 0, Offset 104h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.108](#).

8.12.5.47 LN[0:3]EQ: Lane 0 through Lane 3 Equalization Control

Device 0, Function 0, Offset 108h, 10Ah, 10Ch, 10Eh. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.109](#).

8.12.5.48 LN[4:7]EQ: Lane 4 through Lane 7 Equalization Control

Device 0, Function 0, Offset 110h, 112h, 114h, 116h. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.110](#).

8.12.5.49 LN[8:15]EQ: Lane 8 though Lane 15 Equalization Control

Device 0, Function 0, Offset 118h, 11Ah, 11Ch, 11Eh. This register exist in both RP and NTB modes. It is documented in RP [Section 8.2.111](#).

8.12.6 NTB Shadowed MMIO Space

All shadow registers are visible from the primary side of the NTB. Only some of the shadow registers are visible from the secondary side of the NTB. See each register description for visibility.

Table 8-10. NTB MMIO Shadow Registers (Sheet 1 of 2)

PBAR2LMT	0h	SPAD0	80h
	4h	SPAD1	84h
PBAR4LMT	8h	SPAD2	88h
	Ch	SPAD3	8Ch
PBAR2XLAT	10h	SPAD4	90h
	14h	SPAD5	94h
PBAR4XLAT	18h	SPAD6	98h
	1Ch	SPAD7	9Ch
SBAR2LMT	20h	SPAD8	A0h
	24h	SPAD9	A4h
SBAR4LMT	28h	SPAD10	A8h
	2Ch	SPAD11	ACh
SBAR2XLAT	30h	SPAD12	B0h
	34h	SPAD13	B4h
SBAR4XLAT	38h	SPAD14	B8h
	3Ch	SPAD15	BCh
SBAR0BASE	40h	SPADSEMA4	C0h
	44h		C4h
SBAR2BASE	48h		C8h
	4Ch		CCh
SBAR4BASE	50h	RSDBMSIXV70	D0h
	54h	RSDBMSIXV158	D4h



Table 8-10. NTB MMIO Shadow Registers (Sheet 2 of 2)

NTBCNTL		58h	D8h
CBFDF	SBDF	5Ch	DCh
PDBMSK	PDOORBELL	60h	E0h
SDBMSK	SDOORBELL	64h	E4h
		68h	E8h
		6Ch	ECh
USMEMMISS		70h	F0h
		74h	F4h
		78h	F8h
		7Ch	FCh

Table 8-11. NTB MMIO Map (Sheet 1 of 2)

B2BSPAD0	100h	180h
B2BSPAD1	104h	184h
B2BSPAD2	108h	188h
B2BSPAD3	10Ch	18Ch
B2BSPAD4	110h	190h
B2BSPAD5	114h	194h
B2BSPAD6	118h	198h
B2BSPAD7	11Ch	19Ch
B2BSPAD8	120h	1A0h
B2BSPAD9	124h	1A4h
B2BSPAD10	128h	1A8h
B2BSPAD11	12Ch	1ACh
B2BSPAD12	130h	1B0h
B2BSPAD13	134h	1B4h
B2BSPAD14	138h	1B8h
B2BSPAD15	13Ch	1BCh
B2BDOORBELL	140h	1C0h
B2BBAR0XLAT	144h	1C4h
	148h	1C8h
		14Ch
		150h
		154h
		158h
		15Ch
		160h
		164h
		168h
		16Ch
		170h



Table 8-11. NTB MMIO Map (Sheet 2 of 2)

	174h		1F4h
	178h		1F8h
	17Ch		1FCh

8.12.7 NTB Primary/Secondary Host MMIO Registers

8.12.7.1 PBAR2LMT: Primary BAR 2/3 Limit

PBAR2LMT Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 0 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 0			
Bit	Attr	Default	Description
63:48	RV	0h	Reserved
47:12		00000000h	<p>Primary BAR 2/3 Limit</p> <p>Value representing the size of the memory window exposed by Primary BAR 2/3. A value of 00h will disable this register's functionality, resulting in a BAR window equal to that described by the BAR.</p> <p>This register contains a value used to limit the size of the window exposed by 64-bit BAR 2/3 to a size less than the power-of-two expressed in the Primary BAR 2/3 pair. This register is written by the NTB device driver and will contain the formulated sum of the base address plus the size of the BAR. This final value equates to the highest address that will be accepted through this port. Accesses to the memory area above this register will return Unsupported Request.</p> <p>Notes: If the value in PBAR2LMT is set to a value less than the value in PB23BASE hardware will force the value in PBAR2LMT to be zero and the full size of the window defined by PBAR23SZ will be used. If the value in PBAR2LMT is set equal to the value in PB23BASE the memory window for PB23BASE is disabled. If the value in PBAR2LMT is set to a value greater than the value in the PB23BASE plus 2^PBAR23SZ hardware will force the value in PBAR2LMT to be zero and the full size of the window defined by PBAR23SZ will be used. If PBAR2LMT is zero the full size of the window defined by PBAR23SZ will be used. This field is RW from PB01BASE (primary side window) and RO from SB01BASE (secondary side window). B01BASE: Attr: RW Default: 00000000h SB01BASE: Attr: RO Default: 00000000h</p>
11:0	RV	0h	Reserved

8.12.7.2 PBAR4LMT: Primary BAR 4/5 Limit

PBAR4LMT Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 8 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 8			
Bit	Attr	Default	Description
63:48	RV	0h	Reserved



PBAR4LMT Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 8 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 8			
Bit	Attr	Default	Description
47:12		000000000h	Primary BAR 4/5 Limit Value representing the size of the memory window exposed by Primary BAR 4/5. A value of 00h will disable this register's functionality, resulting in a BAR window equal to that described by the BAR. This register is written by the NTB device driver and will contain the formulated sum of the base address plus the size of the BAR. This final value equates to the highest address that will be accepted through this port. Accesses to the memory area above this register will return Unsupported Request. Notes: If the value in PBAR4LMT is set to a value less than the value in PB45BASE hardware will force the value in PBAR4LMT to be zero and the full size of the window defined by PBAR45SZ will be used. If the value in PBAR4LMT is set equal to the value in PB45BASE the memory window for PB45BASE is disabled. If the value in PBAR4LMT is set to a value greater than the value in the PB45BASE plus 2^PBAR45SZ hardware will force the value in PBAR4LMT to be zero and the full size of the window defined by PBAR45SZ will be used. If PBAR4LMT is zero the full size of the window defined by PBAR45SZ will be used. This field is RW from PB01BASE (primary side window) and RO from SB01BASE (secondary side window). PB01BASE: Attr: RW Default: 000000000h SB01BASE: Attr: RO Default: 000000000h
11:0	RV	0h	Reserved

8.12.7.3 PBAR2XLAT: Primary BAR 2/3 Translate

PBAR2XLAT Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 10 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 10			
Bit	Attr	Default	Description
63:12	RW	0000000000000h	Primary BAR 2/3 Translate The aligned base address into Secondary side memory. This register contains a value used to direct accesses into the memory located on the Secondary side of the NTB made from the Primary side of the NTB through the window claimed by BAR 2/3 on the primary side. The register contains the base address of the Secondary side memory window. Notes: There is no hardware enforced limit for this register, care must be taken when setting this register to stay within the addressable range of the attached system. Default is set to 256 GB The number of bits that are writable in this register is dictated by the value loaded into the PBAR23SZ register by the BIOS at initialization time (before BIOS PCI enumeration). PBAR23SZ indicates the lowest order bit of this register field that is writeable where valid values are 12-39. If PBAR23SZ is set to 12, all bits are writeable. If set to 39, then bits 38:12 are Read Only and will return values of 0. For the special case where PBAR23SZ = '0', bits 63:0 are all RO= '0' resulting in the BAR being disabled. The lowest order address bit is 12 to enforce a minimum granularity of 4 KB.
11:0	RV	0h	Reserved



8.12.7.4 PBAR4XLAT: Primary BAR 4/5 Translate

PBAR4XLAT Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 18 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 18			
Bit	Attr	Default	Description
63:12	RW	0000000000000h	<p>Primary BAR 4/5 Translate</p> <p>The aligned base address into Secondary side memory.</p> <p>This register contains a value used to direct accesses into the memory located on the Secondary side of the NTB made from the Primary side of the NTB through the window claimed by BAR 4/5 on the primary side. The register contains the base address of the Secondary side memory window.</p> <p>Notes:</p> <p>There is no hardware enforced limit for this register, care must be taken when setting this register to stay within the addressable range of the attached system.</p> <p>Default is set to 512 GB</p> <p>The number of bits that are writable in this register is dictated by the value loaded into the PBAR45SZ register by the BIOS at initialization time (before BIOS PCI enumeration). PBAR45SZ indicates the lowest order bit of this register field that is writeable where valid values are 12-39. If PBAR45SZ is set to 12, all bits are writeable. If set to 39, then bits 38:12 are Read Only and will return values of 0.</p> <p>For the special case where PBAR45SZ = '0', bits 63:0 are all RO= '0' resulting in the BAR being disabled.</p> <p>The lowest order address bit is 12 to enforce a minimum granularity of 4 KB.</p>
11:0	RV	0h	Reserved



8.12.7.5 SBAR2LMT: Secondary BAR 2/3 Limit

SBAR2LMT Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 20 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 20			
Bit	Attr	Default	Description
63:12	RW-V	00000000000000h	<p>Secondary BAR 2/3 Limit</p> <p>Value representing the size of the memory window exposed by Secondary BAR 2/3. A value of 00h will disable this register's functionality, resulting in a BAR window equal to that described by the BAR.</p> <p>This register contains a value used to limit the size of the window exposed by 64-bit BAR 2/3 to a size less than the power-of-two expressed in the Secondary BAR 2/3 pair. This register is written by the NTB device driver and will contain the formulated sum of the base address plus the size of the BAR. This final value equates to the highest address that will be accepted through this port. Accesses to the memory area above this register will return Unsupported Request.</p> <p>Notes:</p> <p>If the value in SBAR2LMT is set to a value less than the value in SB23BASE hardware will force the value in SBAR2LMT to be zero and the full size of the window defined by SBAR23SZ will be used.</p> <p>If the value in SBAR2LMT is set equal to the value in SB23BASE the memory window for SB23BASE is disabled.</p> <p>If the value in SBAR2LMT is set to a value greater than the value in the SB23BASE plus 2^{SBAR23SZ} hardware will force the value in SBAR2LMT to be zero and the full size of the window defined by SBAR23SZ will be used.</p> <p>If SBAR2LMT is zero the full size of the window defined by SBAR23SZ will be used.</p>
11:0	RV	0h	Reserved



8.12.7.6 SBAR4LMT: Secondary BAR 4/5 Limit

SBAR4LMT Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 28 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 28			
Bit	Attr	Default	Description
63:12	RW-V	0000000000000h	<p>Secondary BAR 4/5 Limit</p> <p>Value representing the size of the memory window exposed by Secondary BAR 4/5. A value of 00h will disable this register's functionality, resulting in a BAR window equal to that described by the BAR.</p> <p>This register contains a value used to limit the size of the window exposed by 64-bit BAR 4/5 to a size less than the power-of-two expressed in the Secondary BAR 4/5 pair. This register is written by the NTB device driver and will contain the formulated sum of the base address plus the size of the BAR. This final value equates to the highest address that will be accepted through this port. Accesses to the memory area above this register will return Unsupported Request.</p> <p>Notes:</p> <p>If the value in SBAR4LMT is set to a value less than the value in SB45BASE hardware will force the value in SBAR4LMT to be zero and the full size of the window defined by SBAR45SZ will be used.</p> <p>If the value in SBAR4LMT is set equal to the value in SB45BASE the memory window for SB45BASE is disabled.</p> <p>If the value in SBAR4LMT is set to a value greater than the value in the SB45BASE plus 2[^]SBAR45SZ hardware will force the value in SBAR4LMT to be zero and the full size of the window defined by SBAR45SZ will be used.</p> <p>If SBAR4LMT is zero the full size of the window defined by SBAR45SZ will be used.</p>
11:0	RV	0h	Reserved

8.12.7.7 SBAR2XLAT: Secondary BAR 2/3 Translate

This register contains a value used to direct accesses into the memory located on the Primary side of the NTB made from the Secondary side of the NTB through the window claimed by BAR 2/3 on the secondary side. The register contains the base address of the Primary side memory window.

SBAR2XLAT Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 30 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 30			
Bit	Attr	Default	Description
63:12	RW-L	0000000000000h	<p>Secondary BAR 2/3 Translate</p> <p>The aligned base address into Primary side memory.</p> <p>Notes:</p> <p>Attr will appear as RW to SW</p> <p>The number of bits that are writable in this register is dictated by the value loaded into the SBAR23SZ register by the BIOS at initialization time (before BIOS PCI enumeration). SBAR23SZ indicates the lowest order bit of this register field that is writeable where valid values are 12-39. If SBAR23SZ is set to 12, all bits are writeable. If set to 39, then bits 38:12 are Read Only and will return values of 0.</p> <p>For the special case where SBAR23SZ = '0', bits 63:0 are all RO='0' resulting in the BAR being disabled.</p> <p>The lowest order address bit is 12 to enforce a minimum granularity of 4 KB.</p>
11:0	RV	0h	Reserved



8.12.7.8 SBAR4XLAT: Secondary BAR 4/5 Translate


This register contains a value used to direct accesses into the memory located on the Primary side of the NTB made from the Secondary side of the NTB through the window claimed by BAR 4/5 on the secondary side. The register contains the base address of the Primary side memory window.

SBAR4XLAT Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 38 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 38			
Bit	Attr	Default	Description
63:12	RW-L	0000000000000h	Secondary BAR 4/5Translate The aligned base address into Primary side memory. Attr will appear as RW to SW Notes: The number of bits that are writable in this register is dictated by the value loaded into the SBAR45SZ register by the BIOS at initialization time (before BIOS PCI enumeration). SBAR45SZ indicates the lowest order bit of this register field that is writeable where valid values are 12-39. If SBAR45SZ is set to 12, all bits are writeable. If set to 39, then bits 38:12 are Read Only and will return values of 0. For the special case where SBAR45SZ = '0', bits 63:0 are all RO='0' resulting in the BAR being disabled. The lowest order address bit is 12 to enforce a minimum granularity of 4 KB.
11:0	RV	0h	Reserved

8.12.7.9 SBAR0BASE: Secondary BAR 0/1 Base Address

This register is mirrored from the BAR 0/1 register pair in the Configuration Space of the Secondary side of the NTB. The register is used by the processor on the primary side of the NTB to examine and load the BAR 0/1 register pair on the Secondary side of the NTB.

SBAR0BASE Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 38 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 38			
Bit	Attr	Default	Description
63:13		0000000000000h	Secondary BAR 0/1 Base This register is reflected into the BAR 0/1 register pair in the Configuration Space of the Secondary side of the NTB. 256_2_3_Parent: Attr: RW Default: 0000000000000h 0_3_0_PB01BASE: Attr: RW-L Default: 0000000000000h 0_3_0_SB01BASE: Attr: RW-L Default: 0000000000000h
12:4	RV	0h	Reserved
3	RW-O	1b	Prefetchable 1: BAR points to Prefetchable memory (default) 0: BAR points to Non-Prefetchable memory
2:1	RO	10b	Type Memory type claimed by BAR 2/3 is 64-bit addressable.
0	RO	0b	Memory Space Indicator BAR resource is memory (as opposed to I/O).



8.12.7.10 SBAR2BASE: Secondary BAR 2/3 Base Address

This register is mirrored from the BAR 2/3 register pair in the Configuration Space of the Secondary side of the NTB. The register is used by the processor on the primary side of the NTB to examine and load the BAR 2/3 register pair on the Secondary side of the NTB.

SBAR2BASE			
Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 48			
Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 48			
Bit	Attr	Default	Description
63:12	RW	00000000000000h	Secondary BAR 2/3 Base This register is reflected into the BAR 2/3 register pair in the Configuration Space of the Secondary side of the NTB. Notes: The number of bits that are writable in this register is dictated by the value loaded into the SBAR23SZ register by the BIOS at initialization time (before BIOS PCI enumeration). SBAR23SZ indicates the lowest order bit of this register field that is writeable where valid values are 12-39. If SBAR23SZ is set to 12, all bits are writeable. If set to 39, then bits 38:12 are Read Only and will return values of 0. For the special case where SBAR23SZ = '0', bits 63:0 are all RO='0' resulting in the BAR being disabled. The lowest order address bit is 12 to enforce a minimum granularity of 4 KB.
11:4	RO	00h	Reserved Granularity must be at least 4KB.
3	RO	1b	Prefetchable BAR points to Prefetchable memory.
2:1	RO	10b	Type Memory type claimed by BAR 2/3 is 64-bit addressable.
0	RO	0b	Memory Space Indicator BAR resource is memory (as opposed to I/O).

8.12.7.11 SBAR4BASE: Secondary BAR 4/5 Base Address

This register is mirrored from the BAR 4/5 register pair in the Configuration Space of the Secondary side of the NTB. The register is used by the processor on the primary side of the NTB to examine and load the BAR 4/5 register pair on the Secondary side of the NTB.



SBAR4BASE			
Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 50			
Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 50			
Bit	Attr	Default	Description
63:12	RW	000000 000000 0h	<p>Secondary BAR 4/5 Base</p> <p>This register is reflected into the BAR 4/5 register pair in the Configuration Space of the Secondary side of the NTB.</p> <p>Notes:</p> <p>The number of bits that are writable in this register is dictated by the value loaded into the SBAR45SZ register by the BIOS at initialization time (before BIOS PCI enumeration). SBAR45SZ indicates the lowest order bit of this register field that is writable where valid values are 12-39. If SBAR45SZ is set to 12, all bits are writable. If set to 39, then bits 38:12 are Read Only and will return values of 0. For the special case where SBAR45SZ = '0', bits 63:0 are all RO='0' resulting in the BAR being disabled.</p> <p>The lowest order address bit is 12 to enforce a minimum granularity of 4 KB.</p>
11:4	RO	00h	<p>Reserved</p> <p>Granularity must be at least 4 KB.</p>
3	RO	1b	<p>Prefetchable</p> <p>BAR points to Prefetchable memory.</p>
2:1	RO	10b	<p>Type</p> <p>Memory type claimed by BAR 4/5 is 64-bit addressable.</p>
0	RO	0b	<p>Memory Space Indicator</p> <p>BAR resource is memory (as opposed to I/O).</p>

8.12.7.12 NTBCNTL: NTB Control

This register contains Control bits for the Non-transparent Bridge device.

NTBCNTL			
Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 58			
Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 58			
Bit	Attr	Default	Description
31:11	RV	0h	Reserved
10		0b	<p>Crosslink SBDF Disable Increment</p> <p>This bit determines if SBDF value on the DSD is incremented or not.</p> <p>0: the DSD will increment SBDF (to SBDF + 1)</p> <p>1: the DSD will leave the SBDF</p> <p>0_3_0_PB01BASE: Attr: RW-V Default: 0b</p> <p>0_3_0_SB01BASE: Attr: RO-V Default: 0b</p>
9:8		00b	<p>BAR 4/5 Primary to Secondary Snoop Override Control</p> <p>This bit controls the ability to force all transactions within the Primary BAR 4/5 window going from the Primary side to the Secondary side to be snoop/no-snoop independent of the ATTR field in the TLP header.</p> <p>00: All TLP sent as defined by the ATTR field</p> <p>01: Force Snoop on all TLPs: ATTR field overridden to set the 'No Snoop' bit = 0 independent of the setting of the ATTR field of the received TLP.</p> <p>10: Force No-Snoop on all TLPs: ATTR field overridden to set the 'No Snoop' bit = 1 independent of the setting of the ATTR field of the received TLP.</p> <p>11: Reserved</p> <p>0_3_0_PB01BASE: Attr: RW-V Default: 00b</p> <p>0_3_0_SB01BASE: Attr: RO-V Default: 00b</p>



NTBCNTL Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 58 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 58			
Bit	Attr	Default	Description
7:6		00b	BAR 4/5 Secondary to Primary Snoop Override Control This bit controls the ability to force all transactions within the Secondary BAR 4/5 window going from the Secondary side to the Primary side to be snoop/no-snoop independent of the ATTR field in the TLP header. 00: All TLP sent as defined by the ATTR field 01: Force Snoop on all TLPs: ATTR field overridden to set the 'No Snoop' bit = 0 independent of the setting of the ATTR field of the received TLP. 10: Force No-Snoop on all TLPs: ATTR field overridden to set the 'No Snoop' bit = 1 independent of the setting of the ATTR field of the received TLP. 11: Reserved Notes: This field is RW from PB01BASE (primary side window) and RO from SB01BASE (secondary side window). 0_3_0_PB01BASE: Attr: RW Default: 00b 0_3_0_SB01BASE: Attr: RO Default: 00b
5:4		00b	BAR 2/3 Primary to Secondary Snoop Override Control This bit controls the ability to force all transactions within the Primary BAR 2/3 window going from the Primary side to the Secondary side to be snoop/no-snoop independent of the ATTR field in the TLP header. 00: All TLP sent as defined by the ATTR field 01: Force Snoop on all TLPs: ATTR field overridden to set the 'No Snoop' bit = 0 independent of the setting of the ATTR field of the received TLP. 10: Force No-Snoop on all TLPs: ATTR field overridden to set the 'No Snoop' bit = 1 independent of the setting of the ATTR field of the received TLP. 11: Reserved 0_3_0_PB01BASE: Attr: RW-V Default: 00b 0_3_0_SB01BASE: Attr: RO-V Default: 00b
3:2		00b	BAR 2/3 Secondary to Primary Snoop Override Control This bit controls the ability to force all transactions within the Secondary BAR 2/3 window going from the Secondary side to the Primary side to be snoop/no-snoop independent of the ATTR field in the TLP header. 00: All TLP sent as defined by the ATTR field 01: Force Snoop on all TLPs: ATTR field overridden to set the 'No Snoop' bit = 0 independent of the setting of the ATTR field of the received TLP. 10: Force No-Snoop on all TLPs: ATTR field overridden to set the 'No Snoop' bit = 1 independent of the setting of the ATTR field of the received TLP. 11: Reserved Notes: This field is RW from PB01BASE (primary side window) and RO from SB01BASE (secondary side window). 0_3_0_PB01BASE: Attr: RW Default: 00b 0_3_0_SB01BASE: Attr: RO Default: 00b
1		1b	Secondary Link Disable Control This bit controls the ability to train the link on the secondary side of the NTB. This bit is used to make sure the primary side is up and operational before allowing transactions from the secondary side. 0: Link enabled 1: Link disabled Notes: This bit logically or'd with the LNKCON bit 4 This field is RW from PB01BASE (primary side window) and RO from SB01BASE (secondary side window). 0_3_0_PB01BASE: Attr: RW Default: 1b 0_3_0_SB01BASE: Attr: RO Default: 1b



NTBCNTL Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 58 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 58			
Bit	Attr	Default	Description
0		1b	Secondary Configuration Space Lockout Control This bit controls the ability to modify the Secondary side NTB configuration registers from the Secondary side link partner. 0: Secondary side can read and write secondary registers 1: Secondary side modifications locked out but reads are accepted Notes: This does not block MMIO space. This field is RW from PB01BASE (primary side window) and RO from SB01BASE (secondary side window). 0_3_0_PB01BASE: Attr: RW Default: 1b 0_3_0_SB01BASE: Attr: RO Default: 1b

8.12.7.13 SBDF: Secondary Bus, Device and Function

This register contains the Bus, Device and Function for the secondary side of the NTB when PPD.Port Definition is configured as NTB/NTB [Section 8.12.3.26, “PPD: PCIe Port Definition”](#)

SBDF Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 5C Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 5C			
Bit	Attr	Default	Description
15:8	RW	7Fh	Secondary Bus for the secondary side of the NTB port while in NTB mode Value to be used for the Bus number for ID-based routing. Hardware will leave the default value of 7Fh when this port is USD Hardware will increment the default value to 80h when this port is DSD
7:3	RW	00h	Secondary Device for the secondary side of the NTB port while in NTB mode Value to be used for the Device number for ID-based routing.
2:0	RW	0h	Secondary Function for the secondary side of the NTB port while in NTB mode Value to be used for the Function number for ID-based routing.



8.12.7.14 CBFDF: Captured Bus, Device and Function

CBFDF Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 5E Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 5E			
Bit	Attr	Default	Description
15:8	RO-V	00h	<p>Secondary Bus Value to be used for the Bus number for ID-based routing. This register contains the Bus, Device and Function for the secondary side of the NTB when PPD.Port Definition is configured as NTB/RP.</p> <p>Notes: When configured as a NTB/RP, the NTB must capture the Bus and Device Numbers supplied with all Type 0 Configuration Write Requests completed by the NTB and supply these numbers in the Bus and Device Number fields of the Requester ID for all Requests initiated by the NTB. The Bus Number and Device Number may be changed at run time, and so it is necessary to re-capture this information with each and every Configuration Write Request. When configured as a NTB/RP, if NTB must generate a Completion prior to the initial device Configuration Write Request, 0's must be entered into the Bus Number and Device Number fields This register is only valid when configured as NTB/RP. This register has no meaning when configured as NTB/NTB or RP.</p>
7:3	RO-V	00h	<p>Secondary Device Value to be used for the Device number for ID-based routing.</p>
2:0	RO-V	0h	<p>Secondary Function Value to be used for the Function number for ID-based routing.</p>

8.12.7.15 PDOORBELL: Primary Doorbell

This register contains the bits used to generate interrupts to the processor on the Primary side of the NTB.

PDOORBELL Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 60 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 60			
Bit	Attr	Default	Description
15		0h	<p>Link State Interrupt This bit is set when a link state change occurs on the Secondary side of the NTB (Bit 0 of the NTBSTATUS register). This bit is cleared by writing a 1 from the Primary side of the NTB.</p> <p>Notes: This field is RW1C from PB01BASE (primary side window) and RO from SB01BASE (secondary side window). 0_3_0_PB01BASE: Attr: RW1C Default: 0h 0_3_0_SB01BASE: Attr: RO Default: 0h</p>



PDOORBELL Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 60 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 60			
Bit	Attr	Default	Description
14:0		0000h	<p>Primary Doorbell Interrupts</p> <p>These bits are written by the processor on the Secondary side of the NTB to cause a doorbell interrupt to be generated to the processor on the Primary side of the NTB if the associated mask bit in the PDBMSK register is not set. A 1 is written to this register from the Secondary side of the NTB to set the bit, and to clear the bit a 1 is written from the Primary side of the NTB.</p> <p>Notes:</p> <p>If both INTx and MSI (NTB PCI CMD bit 10 and NTB MSI Capability bit 0) interrupt mechanisms are disabled software must poll for status since no interrupts of either type are generated.</p> <p>This field is RW1C from PB01BASE (primary side window) and RW1S from SB01BASE (secondary side window).</p> <p>O_3_0_PB01BASE: Attr: RW1C Default: 0000h O_3_0_SB01BASE: Attr: RW1S Default: 0000h</p>

8.12.7.16 PDBMSK: Primary Doorbell Mask

This register is used to mask the generation of interrupts to the Primary side of the NTB.

PDBMSK Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 62 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 62			
Bit	Attr	Default	Description
15:0		FFFFh	<p>Primary Doorbell Mask</p> <p>This register will allow software to mask the generation of interrupts to the processor on the Primary side of the NTB.</p> <p>0: Allow the interrupt 1: Mask the interrupt</p> <p>Notes:</p> <p>This field is RW from PB01BASE (primary side window) and RO from SB01BASE (secondary side window).</p> <p>O_3_0_PB01BASE: Attr: RW Default: FFFFh O_3_0_SB01BASE: Attr: RO Default: FFFFh</p>

8.12.7.17 SDOORBELL: Secondary Doorbell

This register contains the bits used to generate interrupts to the processor on the Secondary side of the NTB.



SDOORBELL			
Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 64			
Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 64			
Bit	Attr	Default	Description
15:0		0000h	<p>Secondary Doorbell Interrupts</p> <p>These bits are written by the processor on the Primary side of the NTB to cause a doorbell interrupt to be generated to the processor on the Secondary side of the NTB if the associated mask bit in the SDBMSK register is not set. A 1 is written to this register from the Primary side of the NTB to set the bit, and to clear the bit a 1 is written from the Secondary side of the NTB.</p> <p>Notes:</p> <p>If both INTx and MSI (NTB PCI CMD bit 10 and NTB MSI Capability bit 0) interrupt mechanisms are disabled software must poll for status since no interrupts of either type are generated.</p> <p>This field is RW1S from PB01BASE (primary side window) and RW1C from SB01BASE (secondary side window).</p> <p>0_3_0_PB01BASE: Attr: RW1S Default: 0000h 0_3_0_SB01BASE: Attr: RW1C Default: 0000h</p>

8.12.7.18 SDBMSK: Secondary Doorbell Mask

This register is used to mask the generation of interrupts to the Secondary side of the NTB.

SDBMSK			
Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 66			
Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 66			
Bit	Attr	Default	Description
15:0	RW-V	0000h	<p>Secondary Doorbell Mask</p> <p>This register will allow software to mask the generation of interrupts to the processor on the Secondary side of the NTB.</p> <p>0: Allow the interrupt 1: Mask the interrupt</p> <p>Note: This field is RO from PB01BASE (primary side window) and RW from SB01BASE (secondary side window).</p>

8.12.7.19 USMEMMISS: Upstream Memory Miss

This register is used to keep a rolling count of misses to the memory windows on the upstream port on the secondary side of the NTB. This a rollover counter. This counter can be used as an aid in determining if there are any programming errors in mapping the memory windows in the NTB/NTB configuration.

USMEMMISS			
Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 70			
Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 70			
Bit	Attr	Default	Description
15:0	RW-V	0000h	<p>Upstream Memory Miss</p> <p>This register keeps a running count of misses to any of the 3 upstream memory windows on the secondary side of the NTB. The counter does not freeze at max count it rolls over.</p>



8.12.7.20 SPAD[0:15]: Scratchpad Registers 0 - 15

This set of 16 registers, SPAD0 through SPAD15, are shared to both sides of the NTB. They are used to pass information across the bridge.

SPAD[0:15] Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 80, 84, 88, 8C, 90, 94, 98, 9C Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: A0, A4, A8, AC, B0, B4, B8, BC Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 80, 84, 88, 8C, 90, 94, 98, 9C Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: A0, A4, A8, AC, B0, B4, B8, BC			
Bit	Attr	Default	Description
31:0	RW	00h	Scratchpad Register n This set of 16 registers is RW from both sides of the bridge. Synchronization is provided with a hardware semaphore (SPADSEMA4). Software will use these registers to pass a protocol, such as a heartbeat, from system to system across the NTB.

8.12.7.21 SPADSEMA4: Scratchpad Semaphore

This register will allow software to share the Scratchpad registers.

SPADSEMA4 Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: C0 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: C0			
Bit	Attr	Default	Description
31:1	RO	00h	Reserved
0	RW-V	0h	Scratchpad Semaphore This bit will allow software to synchronize write ownership of the scratchpad register set. The processor will read the register: If the returned value is 0, the bit is set by hardware to 1 and the reading processor is granted ownership of the scratchpad registers. If the returned value is 1, then the processor on the opposite side of the NTB already owns the scratchpad registers and the reading processor is not allowed to modify the scratchpad registers. To relinquish ownership, the owning processor writes a 1 to this register to reset the value to 0. Ownership of the scratchpad registers is not set in hardware, i.e. the processor on each side of the NTB is still capable of writing the registers regardless of the state of this bit. The attribute of this register is R0TS (Read 0 to Set) and W1TC (Write 1 to Clear)

8.12.7.22 RSDBMSIXV70: Route Secondary Doorbell MSI-X Vector 7 to 0

This register is used to allow flexibility in the SDOORBELL bits 7 to 0 assignments to one of 4 MSI-X vectors. Register is set up to be able to expand to 16 MSI-X vectors in future designs.

RSDBMSIXV70 Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: D0 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: D0			
Bit	Attr	Default	Description
31:30	RV	0h	Reserved



RSDBMSIXV70 Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: D0 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: D0			
Bit	Attr	Default	Description
29:28	RW	2h	MSI-X Vector assignment for SDOORBELL bit 7
27:26	RV	0h	Reserved
25:24	RW	2h	MSI-X Vector assignment for SDOORBELL bit 6
23:22	RV	0h	Reserved
21:20	RW	1h	MSI-X Vector assignment for SDOORBELL bit 5
19:18	RV	0h	Reserved
17:16	RW	1h	MSI-X Vector assignment for SDOORBELL bit 4
15:14	RV	0h	Reserved
13:12	RW	1h	MSI-X Vector assignment for SDOORBELL bit 3
11:10	RV	0h	Reserved
9:8	RW	1h	MSI-X Vector assignment for SDOORBELL bit 2
7:6	RV	0h	Reserved
5:4	RW	1h	MSI-X Vector assignment for SDOORBELL bit 1
3:2	RV	0h	Reserved
1:0	RW	0h	MSI-X Vector assignment for SDOORBELL bit 0 11 = MSI-X vector allocation 310 = MSI-X vector allocation 2 01 = MSI-X vector allocation 1 00 = MSI-X vector allocation 0

8.12.7.23 RSDBMSIXV158: Route Secondary Doorbell MSI-X Vector 15 to 8

This register is used to allow flexibility in the SDOORBELL bits 15 to 8 assignments to one of 4 MSI-X vectors. Register is set up to be able to expand to 16 MSI-X vectors in future designs.

RSDBMSIXV158 Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: D4 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: D4			
Bit	Attr	Default	Description
31:30	RV	0h	Reserved
29:28	RW	3h	MSI-X Vector assignment for SDOORBELL bit 15
27:26	RV	0h	Reserved
25:24	RW	3h	MSI-X Vector assignment for SDOORBELL bit 14
23:22	RV	0h	Reserved
21:20	RW	3h	MSI-X Vector assignment for SDOORBELL bit 13
19:18	RV	0h	Reserved
17:16	RW	3h	MSI-X Vector assignment for SDOORBELL bit 12
15:14	RV	0h	Reserved
13:12	RW	3h	MSI-X Vector assignment for SDOORBELL bit 11
11:10	RV	0h	Reserved
9:8	RW	2h	MSI-X Vector assignment for SDOORBELL bit 10



RSDBMSIXV158 Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: D4 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: D4			
Bit	Attr	Default	Description
7:6	RV	0h	Reserved
5:4	RW	2h	MSI-X Vector assignment for SDOORBELL bit 9
3:2	RV	0h	Reserved
1:0	RW	2h	MSI-X Vector assignment for SDOORBELL bit 8 11 = MSI-X vector allocation 310 = MSI-X vector allocation 2 01 = MSI-X vector allocation 1 00 = MSI-X vector allocation 0

8.12.7.24 B2BSPAD[0:15]: Back-to-back Scratchpad Registers 0

This set of 16 registers, B2BSPAD0 through B2BSPAD15, is used by the processor on the Primary side of the NTB to generate accesses to the Scratchpad registers on a second NTB whose Secondary side is connected to the Secondary side of this NTB. Writing to these registers will cause the NTB to generate a PCIe packet that is sent to the connected NTB's Scratchpad registers. This mechanism allows inter-system communication through the pair of NTBs. Note that the B2BBAROXLAT register must be properly configured to point to BAR 0/1 on the opposite NTB for this mechanism to function properly. Note also that this mechanism doesn't require a semaphore because each NTB has a set of Scratchpad registers. The system passing information will always write to the registers on the opposite NTB, and read its own Scratchpad registers to get information from the opposite system.

B2BSPAD[0:15] Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 100, 104, 108, 10C, 110, 114, 118, 11C Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 120, 124, 128, 12C, 130, 134, 138, 13C Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 100, 104, 108, 10C, 110, 114, 118, 11C Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 120, 124, 128, 12C, 130, 134, 138, 13C			
Bit	Attr	Default	Description
31:0		00000000h	Back-to-back Scratchpad Register n This set of 16 registers is written only from the Primary side of the NTB. A write to any of these registers will cause the NTB to generate a PCIe packet which is sent across the link to the opposite NTB's corresponding Scratchpad register. 0_3_0_PB01BASE: Attr: RW Default: 00000000h 0_3_0_SB01BASE: Attr: RO Default: 00000000h

8.12.7.25 B2BDOORBELL: Back-to-back Doorbell

This register is used by the processor on the primary side of the NTB to generate accesses to the PDOORBELL register on a second NTB whose Secondary side is connected to the Secondary side of this NTB. Writing to this register will cause the NTB to generate a PCIe packet that is sent to the connected NTB's PDOORBELL register, causing an interrupt to be sent to the processor on the second system. This mechanism allows inter-system communication through the pair of NTBs. Note that the B2BBAROXLAT register must be properly configured to point to BAR 0/1 on the opposite NTB for this mechanism to function properly.



B2BDOORBELL Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 140 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 140			
Bit	Attr	Default	Description
15:14	RV	0h	Reserved
13:0		0000h	B2B Doorbell Interrupt These bits are written by the processor on the Primary side of the NTB. Writing to this register will cause a PCIe packet with the same contents as the write to be sent to the PDOORBELL register on the a second NTB connected back-to-back with this NTB, which in turn will cause a doorbell interrupt to be generated to the processor on the second NTB. Hardware on the originating NTB clears this register upon scheduling the PCIe packet. O_3_0_PB01BASE: Attr: RW1S Default: 0000h O_3_0_SB01BASE: Attr: RO Default: 0000h

8.12.7.26 B2BBAROXLAT: Back-to-back BAR 0/1 Translate

B2BBAROXLAT Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 144 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 144			
Bit	Attr	Default	Description
63:15		000000 000000 0h	B2B translate Base address of Secondary BAR 0/1 on the opposite NTB. This register is used to set the base address where the back-to-back doorbell and scratchpad packets will be sent. This register must match the base address loaded into the BAR 0/1 pair on the opposite NTB, whose Secondary side in linked to the Secondary side of this NTB. Notes: There is no hardware enforced limit for this register, care must be taken when setting this register to stay within the addressable range of the attached system. Primary side MSI-X MMIO registers reached via PB01BASE O_3_0_PB01BASE: Attr: RW Default: 0000000000000h O_3_0_SB01BASE: Attr: RO Default: 0000000000000h
14:0	RO	00h	Reserved Limit register has a granularity of 32 KB (215)



8.12.8 MSI-X MMIO Registers (NTB Primary side)

Primary side MSI-X MMIO registers reached via PB01BASE

Table 8-12. NTB MMIO Map

PMSIXTBL0	2000h	PMSIXPBA				3000h
	2004h					3004h
PMSIXDATA0	2008h					3008h
PMSICXVECCNTLO	200Ch					300Ch
PMSIXTBL1	2010h					3010h
	2014h					3014h
PMSIXDATA1	2018h					3018h
PMSICXVECCNTL1	201Ch					301Ch
PMSIXTBL2	2020h					3020h
	2024h					3024h
PMSIXDATA2	2028h					3028h
PMSICXVECCNTL2	202Ch					302Ch
PMSIXTBL3	2030h					3030h
	2034h					3034h
PMSIXDATA3	2038h					3038h
PMSICXVECCNTL3	203Ch					303Ch
	2040h					3040h
	2044h					3044h
	2048h					3048h
	204Ch					304Ch

8.12.8.1 PMSIXTBL[0:3]: Primary MSI-X Table Address Register 0 - 3

PMSIXTBL[0:3] Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 2000, 2010, 2020, 2030 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 2000, 2010, 2020, 2030			
Bit	Attr	Default	Description
63:32	RW	00000000h	MSI-X Upper Address Upper address bits used when generating an MSI.
31:2	RW	00000000h	MSI-X Address System-specified message lower address. For MSI-X messages, the contents of this field from an MSI-X Table entry specifies the lower portion of the DWORD-aligned address (AD[31:02]) for the memory write transaction.
1:0	RO	00b	MSG_ADD10 For proper DWORD alignment, these bits need to be 0's.



8.12.8.2 PMSIXDATA[0:3]: Primary MSI-X Message Data Register 0

PMSIXDATA[0:3] Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 2008, 2018, 2028, 2038 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 2008, 2018, 2028, 2038			
Bit	Attr	Default	Description
31:0	RW	0000h	Message Data System-specified message data.

Table 8-13. MSI-X Vector Handling and Processing by IIO on Primary Side

Number of Messages enabled by Software	Events	IV[7:0]
1	All	xxxxxxx ¹
4	PD[04:00]	xxxxxxx
	PD[09:05]	xxxxxxx
	PD[14:10]	xxxxxxx
	HP, BW-change, AER, PD[15]	xxxxxxx

Notes:

1. The term "xxxxxx" in the Interrupt vector denotes that software initializes them and IIO will not modify any of the "x" bits

8.12.8.3 PMSICXVECCNTL[0:3]: Primary MSI-X Vector Control Register 0 -3

PMSICXVECCNTL[0:3] Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 200C, 201C, 202C, 203C Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 200C, 201C, 202C, 203C			
Bit	Attr	Default	Description
31:1	RO	00000000h	Reserved
0	RW	1b	MSI-X Mask When this bit is set, the NTB is prohibited from sending a message using this MSI-X Table entry. However, any other MSI-X Table entries programmed with the same vector will still be capable of sending an equivalent message unless they are also masked.

8.12.8.4 PMSICXPBA: Primary MSI-X Pending Bit Array

Secondary side MSI-X MMIO registers reached via PB01BASE (debug) and SB01BASE

PMSICXPBA Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 3000 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 3000			
Bit	Attr	Default	Description
31:4	RV	0h	Reserved
3	RO-V	0b	MSI-X Table Entry 03 NTB has a Pending Message
2	RO-V	0b	MSI-X Table Entry 02 NTB has a Pending Message



PMSICXPBA Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 3000 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 3000			
Bit	Attr	Default	Description
1	RO-V	0b	MSI-X Table Entry 01 NTB has a Pending Message
0	RO-V	0b	MSI-X Table Entry 00 NTB has a Pending Message

8.12.9 MSI-X MMIO registers (NTB Secondary Side)

Secondary side MSI-X MMIO registers reached via PB01BASE (debug) and SB01BASE.

These registers are valid when in NTB/RP configuration.

Table 8-14. NTB MMIO Map

SMSIXTBL0	4000h	SMSIXPBA				5000h
	4004h					5004h
SMSIXDATA0	4008h					5008h
SMSIXVECCNTL0	400Ch					500Ch
SMSIXTBL1	4010h					5010h
	4014h					5014h
SMSIXDATA1	4018h					5018h
SMSIXVECCNTL1	401Ch					501Ch
SMSIXTBL2	4020h					5020h
	4024h					5024h
SMSIXDATA2	4028h					5028h
SMSIXVECCNTL2	402Ch					502Ch
SMSIXTBL3	4030h					5030h
	4034h					5034h
SMSIXDATA3	4038h					5038h
SMSIXVECCNTL3	403Ch					503Ch
	4040h					5040h
	4044h					5044h
	4048h					5048h
	404Ch					504Ch

8.12.9.1 SMSIXTBL[0:3]: Secondary MSI-X Table Address Register 0 - 3

SMSIXTBL[0:3] Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 4000, 4010, 4020, 4030 Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 4000, 4010, 4020, 4030			
Bit	Attr	Default	Description
63:32	RW	000000 00h	MSI-X Upper Address Upper address bits used when generating an MSI-X.



SMSIXTBL[0:3] Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 4000, 4010, 4020, 4030 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 4000, 4010, 4020, 4030			
Bit	Attr	Default	Description
31:2	RW	00000000h	MSI-X Address System-specified message lower address. For MSI-X messages, the contents of this field from an MSI-X Table entry specifies the lower portion of the DWORD-aligned address (AD[31:02]) for the memory write transaction.
1:0	RO	00b	MSG_ADD10 For proper DWORD alignment, these bits need to be 0's.

8.12.9.2 SMSIXDATA[0:3]: Secondary MSI-X Message Data Register 0 - 3

SDOORBELL bits to MSI-X mapping can be reprogrammed through [Section 8.12.7.22](#) and [Section 8.12.7.23](#).

SMSIXDATA[0:3] Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 4008, 4018, 4028, 4038 Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 4008, 4018, 4028, 4038			
Bit	Attr	Default	Description
31:0	RW	0000h	Message Data System-specified message data.

8.12.9.3 SMSIXVECCNTL[0:3]: Secondary MSI-X Vector Control Register 0 - 3

SMSIXVECCNTL[0:3] Bus: 0 Device: 3Function: OMMIO BAR: PB01BASE Offset: 400C, 401C, 402C, 403C Bus: 0 Device: 3Function: OMMIO BAR: SB01BASE Offset: 400C, 401C, 402C, 403C			
Bit	Attr	Default	Description
31:1	RO	00000000h	Reserved
0	RW	1b	MSI-X Mask When this bit is set, the NTB is prohibited from sending a message using this MSI-X Table entry. However, any other MSI-X Table entries programmed with the same vector will still be capable of sending an equivalent message unless they are also masked.

Table 8-15. MSI-X Vector Handling and Processing by IIO on Secondary Side

Number of Messages Enabled by Software	Events	IV[7:0]
1	All	xxxxxxx ¹
4	PD[04:00]	xxxxxxx
	PD[09:05]	xxxxxxx
	PD[14:10]	xxxxxxx
	PD[15]	xxxxxxx



Notes:

1. The term "xxxxx" in the Interrupt vector denotes that software initializes them and IIO will not modify any of the "x" bits

8.12.9.4 SMSICXPBA: Secondary MSI-X Pending Bit Array

SMSICXPBA			
Bus: 0 Device: 3Function: 0MMIO BAR: PB01BASE Offset: 5000			
Bus: 0 Device: 3Function: 0MMIO BAR: SB01BASE Offset: 5000			
Bit	Attr	Default	Description
31:4	RV	0h	Reserved
3	RO-V	0b	MSI-X Table Entry 03 NTB has a Pending Message
2	RO-V	0b	MSI-X Table Entry 02 NTB has a Pending Message
1	RO-V	0b	MSI-X Table Entry 01 NTB has a Pending Message
0	RO-V	0b	MSI-X Table Entry 00 NTB has a Pending Message

8.13 Crystal Beach DMA

This section describes the standard PCI configuration registers and device specific Configuration Registers related to below:

- Crystal Beach DMA Registers - Device 4, Function 0 -7
- Crystal Beach MMIO Registers (MBAR, CBAR)

8.13.1 Crystal Beach DMA Registers Maps

Table 8-16. Crystal Beach DMA Configuration Map. Device 4 Function 0 -7 Offset 0x00H to 0x0FCH (Sheet 1 of 2)

DID	VID	00h	MSIXMSGCTL	MSIXNXTPT R ¹	MSIXCAPID	80h
PCISTS	PCICMD	04h	TABLEOFF_BIR			84h
CCR	RID	08h	PBAOFF_BIR			88h
HDR	CLSR	0Ch				8Ch
CB_BAR		10h	EXPCAP	NEXTPTR	CAPID	90h
		14h	DEVCAP			94h
		18h	DEVSTS	DEVCON		98h
		1Ch				9Ch
		20h				A0h
24h	A4h					
		28h				A8h
SDID	SVID	2Ch				ACh
		30h				B0h
		CAPTR ²	34h	DEVCAP2		B4h
			38h	DEVCON2		B8h



Table 8-16. Crystal Beach DMA Configuration Map. Device 4 Function 0 -7 Offset 0x00H to 0x0FCH (Sheet 2 of 2)

	INTPIN	INTL	3Ch		BCh
			40h		C0h
			44h		C4h
			48h		C8h
			4Ch		CCh
			50h		D0h
			54h		D4h
			58h		D8h
			5Ch		DCh
		DEVCFG/ Reserved ³	60h	PMCAP	E0h
			64h	PMCSR	E4h
			68h		E8h
			6Ch		ECh
			70h		F0h
			74h		F4h
			78h		F8h
			7Ch		FCh

Notes:

1. Each capability block contains a Next Pointer to the next capability block, or a value of zero indicating it is the last capability
2. CAPPTR points to the first capability block
3. This register is defined for only Fn#0 and is reserved for other functions



Table 8-17. Crystal Beach DMA Configuration Map. Device 4 Function 0 -7 Offset 0x100-0x1FF

	100h	CHANERR_INT		180h
	104h	CHANERRMSK_INT		184h
	108h	CHANERRSEV_INT		188h
	10Ch		CHANERRP TR	18Ch
	110h			190h
	114h			194h
	118h			198h
	11Ch			19Ch
	120h			1A0h
	124h			1A4h
	128h			1A8h
	12Ch			1ACh
	130h			1B0h
	134h			1B4h
	138h			1B8h
	13Ch			1BCh
	140h			1C0h
144h			1C4h	
DMAUNCERRSTS ¹ /Reserved			148h	1C8h
DMAUNCERRMSK ¹ /Reserved			14Ch	1CCh
DMAUNCERRSEV ¹ /Reserved			150h	1D0h
	DMAUNCER RPTR ¹ / Reserved		154h	1D4h
			158h	1D8h
			15Ch	1DCh
	DMAGLBER RPTR ¹ / Reserved		160h	1E0h
			164h	1E4h
			168h	1E8h
			16Ch	1ECh
			170h	1F0h
			174h	1F4h
			178h	1F8h
			17Ch	1FCh

Notes:

1. All the DMAUNC* and DMAGLBERRPTR registers are defined only for Fn#0 and these register offsets are reserved for other functions

